Reference

Tools and Workshop Tips REF•2



● Building up a tool kit and equipping your workshop ● Using tools ● Understanding bearing, seal, fastener and chain sizes and markings ● Repair techniques

Security REF•20




● Locks and chains ● U-locks ● Disc locks ● Alarms and immobilisers ● Security marking systems ● Tips on how to prevent bike theft

Lubricants and fluids REF•23



● Engine oils ● Transmission (gear) oils ● Coolant/anti-freeze ● Fork oils and suspension fluids ● Brake/clutch fluids ● Spray lubes, degreasers and solvents

Conversion Factors REF•26



● Formulae for conversion of the metric (SI) units used throughout the manual into Imperial measures

MOT Test Checks REF•27



● A guide to the UK MOT test ● Which items are tested ● How to prepare your motorcycle for the test and perform a pre-test check

Storage REF•32



● How to prepare your motorcycle for going into storage and protect essential systems ● How to get the motorcycle back on the road

Fault Finding REF•35



● Common faults and their likely causes ● How to check engine cylinder compression ● How to make electrical tests and use test meters

Technical Terms Explained REF•51



● Component names, technical terms and common abbreviations explained

Index REF•55

Buying tools

A toolkit is a fundamental requirement for servicing and repairing a motorcycle. Although there will be an initial expense in building up enough tools for servicing, this will soon be offset by the savings made by doing the job yourself. As experience and confidence grow, additional tools can be added to enable the repair and overhaul of the motorcycle. Many of the specialist tools are expensive and not often used so it may be preferable to hire them, or for a group of friends or motorcycle club to join in the purchase.

As a rule, it is better to buy more expensive, good quality tools. Cheaper tools are likely to wear out faster and need to be renewed more often, nullifying the original saving.

Warning: To avoid the risk of a poor quality tool breaking in use, causing injury or damage to the component being worked on, always aim to purchase tools which meet the relevant national safety standards.

The following lists of tools do not represent the manufacturer's service tools, but serve as a guide to help the owner decide which tools are needed for this level of work. In addition, items such as an electric drill, hacksaw, files, soldering iron and a workbench equipped with a vice, may be needed. Although not classed as tools, a selection of bolts, screws, nuts, washers and pieces of tubing always come in useful.


For more information about tools, refer to the Haynes *Motorcycle Workshop Practice TechBook* (Bk. No. 3470).

Manufacturer's service tools

Inevitably certain tasks require the use of a service tool. Where possible an alternative tool or method of approach is recommended, but sometimes there is no option if personal injury or damage to the component is to be avoided. Where required, service tools are referred to in the relevant procedure.


Service tools can usually only be purchased from a motorcycle dealer and are identified by a part number. Some of the commonly-used tools, such as rotor pullers, are available in aftermarket form from mail-order motorcycle tool and accessory suppliers.

Maintenance and minor repair tools

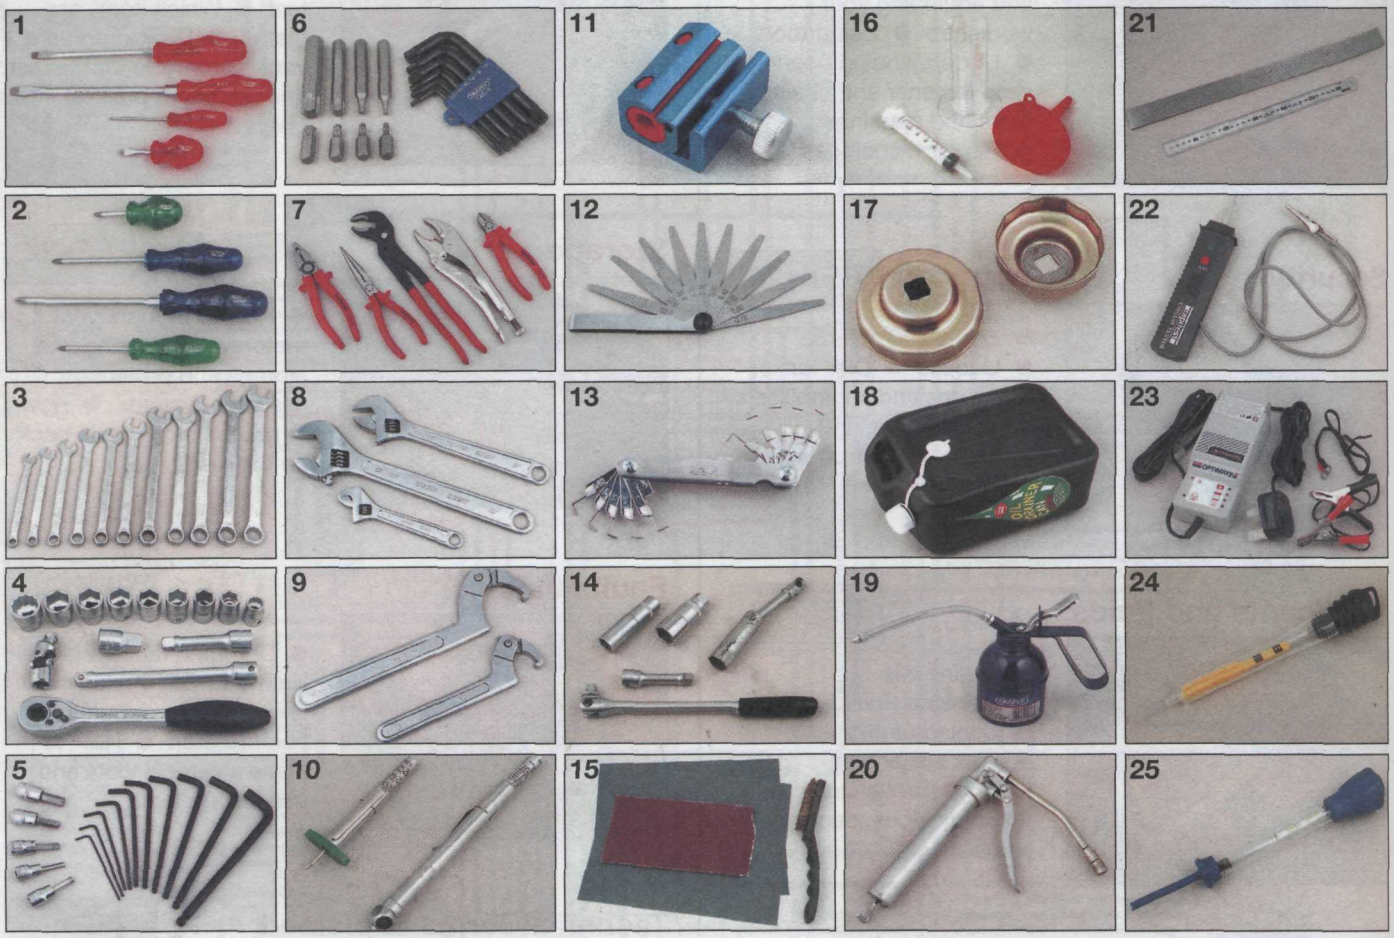

1 *Set of flat-bladed screwdrivers*
2 *Set of Phillips head screwdrivers*
3 *Combination open-end and ring spanners*
4 *Socket set (3/8 inch or 1/2 inch drive)*
5 *Set of Allen keys or bits*
6 *Set of Torx keys or bits*
7 *Pliers, cutters and self-locking grips (Mole grips)*
8 *Adjustable spanners*
9 *C-spanners*
10 *Tread depth gauge and tyre pressure gauge*
11 *Cable oiler clamp*
12 *Feeler gauges*
13 *Spark plug gap measuring tool*
14 *Spark plug spanner or deep plug sockets*
15 *Wire brush and emery paper*
16 *Calibrated syringe, measuring vessel and funnel*
17 *Oil filter adapters*
18 *Oil drainer can or tray*
19 *Pump type oil can*
20 *Grease gun*
21 *Straight-edge and steel rule*
22 *Continuity tester*
23 *Battery charger*
24 *Hydrometer (for battery specific gravity check)*
25 *Anti-freeze tester (for liquid-cooled engines)*

Repair and overhaul tools

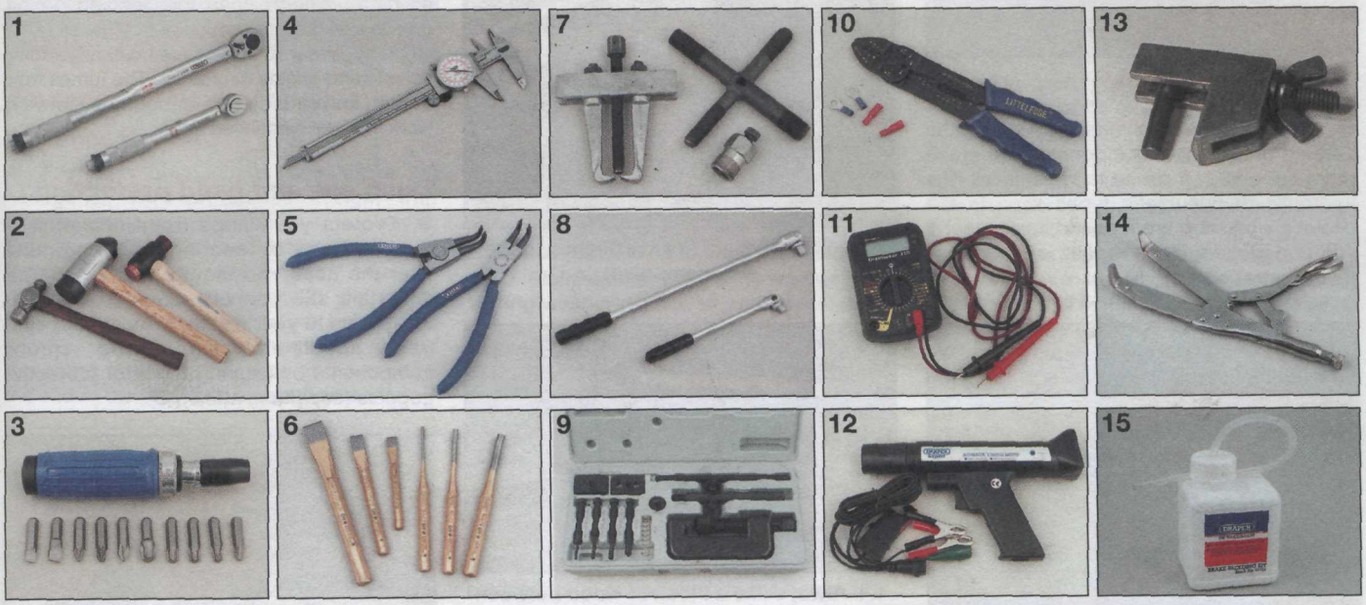

1 *Torque wrench (small and mid-ranges)*
2 *Conventional, plastic or soft-faced hammers*
3 *Impact driver set*
4 *Vernier gauge*
5 *Circlip pliers (internal and external, or combination)*
6 *Set of cold chisels and punches*
7 *Selection of pullers*
8 *Breaker bars*
9 *Chain breaking/ riveting tool set*
10 *Wire stripper and crimper tool*
11 *Multimeter (measures amps, volts and ohms)*
12 *Stroboscope (for dynamic timing checks)*
13 *Hose clamp (wingnut type shown)*
14 *Clutch holding tool*
15 *One-man brake/clutch bleeder kit*

Specialist tools



1 *Micrometers (external type)*
2 *Telescoping gauges*
3 *Dial gauge*
4 *Cylinder compression gauge*
5 *Vacuum gauges (left) or manometer (right)*
6 *Oil pressure gauge*
7 *Plastigauge kit*
8 *Valve spring compressor (4-stroke engines)*
9 *Piston pin drawbolt tool*
10 *Piston ring removal and installation tool*
11 *Piston ring clamp*
12 *Cylinder bore hone (stone type shown)*
13 *Stud extractor*
14 *Screw extractor set*
15 *Bearing driver set*

1 Workshop equipment and facilities

The workbench

● Work is made much easier by raising the bike up on a ramp - components are much more accessible if raised to waist level. The hydraulic or pneumatic types seen in the dealer's workshop are a sound investment if you undertake a lot of repairs or overhauls **(see illustration 1.1)**.



1.1 Hydraulic motorcycle ramp

● If raised off ground level, the bike must be supported on the ramp to avoid it falling. Most ramps incorporate a front wheel locating clamp which can be adjusted to suit different diameter wheels. When tightening the clamp, take care not to mark the wheel rim or damage the tyre - use wood blocks on each side to prevent this.

● Secure the bike to the ramp using tie-downs **(see illustration 1.2)**. If the bike has only a sidestand, and hence leans at a dangerous angle when raised, support the bike on an auxiliary stand.



1.2 Tie-downs are used around the passenger footrests to secure the bike

● Auxiliary (paddock) stands are widely available from mail order companies or motorcycle dealers and attach either to the wheel axle or swingarm pivot **(see illustration 1.3)**. If the motorcycle has a centrestand, you can support it under the crankcase to prevent it toppling whilst either wheel is removed **(see illustration 1.4)**.



1.3 This auxiliary stand attaches to the swingarm pivot



1.4 Always use a block of wood between the engine and jack head when supporting the engine in this way

Fumes and fire


● Refer to the Safety first! page at the beginning of the manual for full details. Make sure your workshop is equipped with a fire extinguisher suitable for fuel-related fires (Class B fire - flammable liquids) - it is not sufficient to have a water-filled extinguisher.

● Always ensure adequate ventilation is available. Unless an exhaust gas extraction system is available for use, ensure that the engine is run outside of the workshop.

● If working on the fuel system, make sure the workshop is ventilated to avoid a build-up of fumes. This applies equally to fume build-up when charging a battery. Do not smoke or allow anyone else to smoke in the workshop.

Fluids

● If you need to drain fuel from the tank, store it in an approved container marked as suitable for the storage of petrol (gasoline) **(see illustration 1.5)**. Do not store fuel in glass jars or bottles.

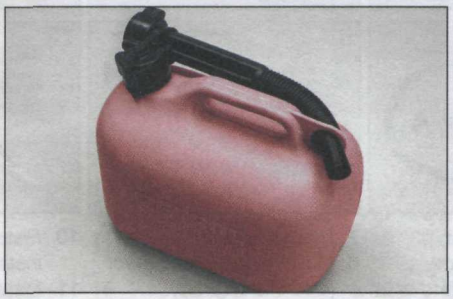

1.5 Use an approved can only for storing petrol (gasoline)

● Use proprietary engine degreasers or solvents which have a high flash-point, such as paraffin (kerosene), for cleaning off oil, grease and dirt - never use petrol (gasoline) for cleaning. Wear rubber gloves when handling solvent and engine degreaser. The fumes from certain solvents can be dangerous - always work in a well-ventilated area.

Dust, eye and hand protection

● Protect your lungs from inhalation of dust particles by wearing a filtering mask over the nose and mouth. Many frictional materials still contain asbestos which is dangerous to your health. Protect your eyes from spouts of liquid and sprung components by wearing a pair of protective goggles **(see illustration 1.6)**.



1.6 A fire extinguisher, goggles, mask and protective gloves should be at hand in the workshop

● Protect your hands from contact with solvents, fuel and oils by wearing rubber gloves. Alternatively apply a barrier cream to your hands before starting work. If handling hot components or fluids, wear suitable gloves to protect your hands from scalding and burns.

What to do with old fluids

● Old cleaning solvent, fuel, coolant and oils should not be poured down domestic drains or onto the ground. Package the fluid up in old oil containers, label it accordingly, and take it to a garage or disposal facility. Contact your local authority for location of such sites or ring the oil care hotline.

OIL CARE
FOLLOW THE CODE
OIL BANK LINE
0800 66 33 66
www.oilbankline.org.uk

Note: It is antisocial and illegal to dump oil down the drain. To find the location of your local oil recycling bank, call this number free.


In the USA, note that any oil supplier must accept used oil for recycling.

2 Fasteners - screws, bolts and nuts


Fastener types and applications

Bolts and screws

● Fastener head types are either of hexagonal, Torx or splined design, with internal and external versions of each type **(see illustrations 2.1 and 2.2);** splined head fasteners are not in common use on motorcycles. The conventional slotted or Phillips head design is used for certain screws. Bolt or screw length is always measured from the underside of the head to the end of the item **(see illustration 2.11)**.

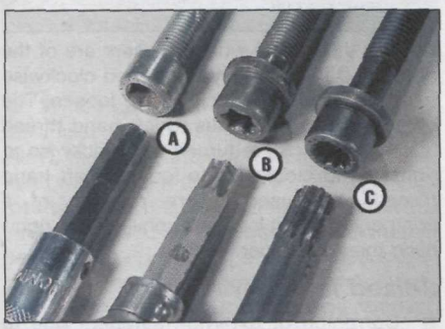

2.1 Internal hexagon/Allen (A), Torx (B) and splined (C) fasteners, with corresponding bits

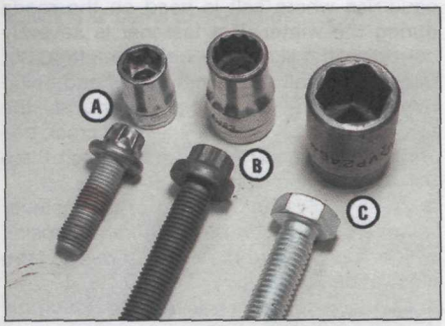


2.2 External Torx (A), splined (B) and hexagon (C) fasteners, with corresponding sockets

● Certain fasteners on the motorcycle have a tensile marking on their heads, the higher the marking the stronger the fastener. High tensile fasteners generally carry a 10 or higher marking. Never replace a high tensile fastener with one of a lower tensile strength.

Washers (see illustration 2.3)

● Plain washers are used between a fastener head and a component to prevent damage to the component or to spread the load when torque is applied. Plain washers can also be used as spacers or shims in certain assemblies. Copper or aluminium plain washers are often used as sealing washers on drain plugs.

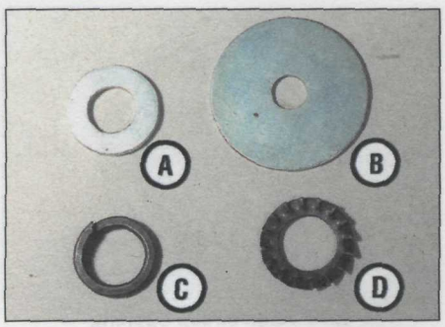

2.3 Plain washer (A), penny washer (B), spring washer (C) and serrated washer (D)

● The split-ring spring washer works by applying axial tension between the fastener head and component. If flattened, it is fatigued and must be renewed. If a plain (flat) washer is used on the fastener, position the spring washer between the fastener and the plain washer.

● Serrated star type washers dig into the fastener and component faces, preventing loosening. They are often used on electrical earth (ground) connections to the frame.


● Cone type washers (sometimes called Belleville) are conical and when tightened apply axial tension between the fastener head and component. They must be installed with the dished side against the component and often carry an OUTSIDE marking on their outer face. If flattened, they are fatigued and must be renewed.

● Tab washers are used to lock plain nuts or bolts on a shaft. A portion of the tab washer is bent up hard against one flat of the nut or bolt to prevent it loosening. Due to the tab washer being deformed in use, a new tab washer should be used every time it is disturbed.

● Wave washers are used to take up endfloat on a shaft. They provide light springing and prevent excessive side-to-side play of a component. Can be found on rocker arm shafts.

Nuts and split pins


● Conventional plain nuts are usually six-sided **(see illustration 2.4)**. They are sized by thread diameter and pitch. High tensile nuts carry a number on one end to denote their tensile strength.

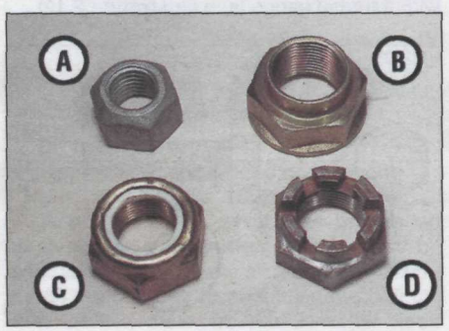


2.4 Plain nut (A), shouldered locknut (B), nylon insert nut (C) and castellated nut (D)

● Self-locking nuts either have a nylon insert, or two spring metal tabs, or a shoulder which is staked into a groove in the shaft - their advantage over conventional plain nuts is a resistance to loosening due to vibration. The nylon insert type can be used a number of times, but must be renewed when the friction of the nylon insert is reduced, ie when the nut spins freely on the shaft. The spring tab type can be reused unless the tabs are damaged. The shouldered type must be renewed every time it is disturbed.

● Split pins (cotter pins) are used to lock a castellated nut to a shaft or to prevent slackening of a plain nut. Common applications are wheel axles and brake torque arms. Because the split pin arms are deformed to lock around the nut a new split pin must always be used on installation - always fit the correct size split pin which will fit snugly in the shaft hole. Make sure the split pin arms are correctly located around the nut **(see illustrations 2.5 and 2.6)**.

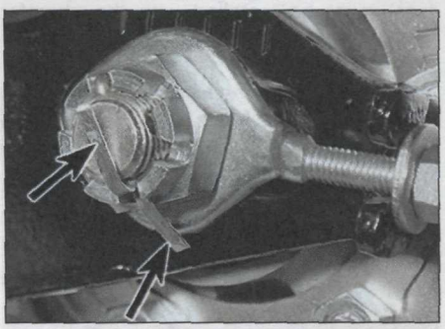


2.5 Bend split pin (cotter pin) arms as shown (arrows) to secure a castellated nut

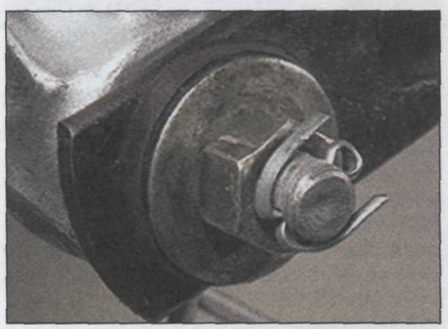

2.6 Bend split pin (cotter pin) arms as shown to secure a plain nut

Caution: If the castellated nut slots do not align with the shaft hole after tightening to the torque setting, tighten the nut until the next slot aligns with the hole - never slacken the nut to align its slot.


● R-pins (shaped like the letter R), or slip pins as they are sometimes called, are sprung and can be reused if they are otherwise in good condition. Always install R-pins with their closed end facing forwards **(see illustration 2.7)**.

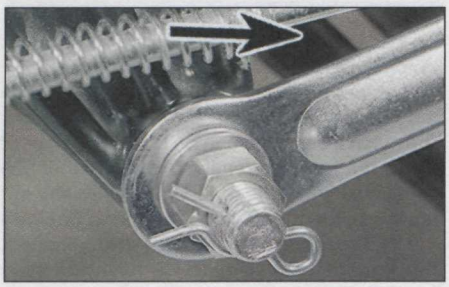

2.7 Correct fitting of R-pin. Arrow indicates forward direction


Circlips (see illustration 2.8)

● Circlips (sometimes called snap-rings) are used to retain components on a shaft or in a housing and have corresponding external or internal ears to permit removal. Parallel-sided (machined) circlips can be installed either way round in their groove, whereas stamped circlips (which have a chamfered edge on one face) must be installed with the chamfer facing away from the direction of thrust load **(see illustration 2.9)**.

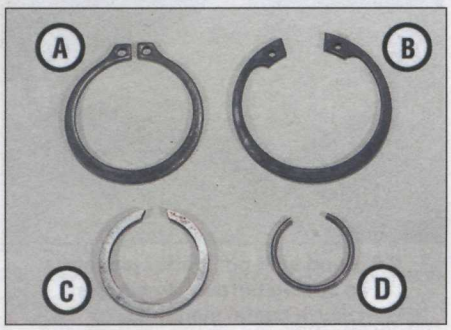


2.8 External stamped circlip (A), internal stamped circlip (B), machined circlip (C) and wire circlip (D)

● Always use circlip pliers to remove and install circlips; expand or compress them just enough to remove them. After installation, rotate the circlip in its groove to ensure it is securely seated. If installing a circlip on a splined shaft, always align its opening with a shaft channel to ensure the circlip ends are well supported and unlikely to catch **(see illustration 2.10)**.

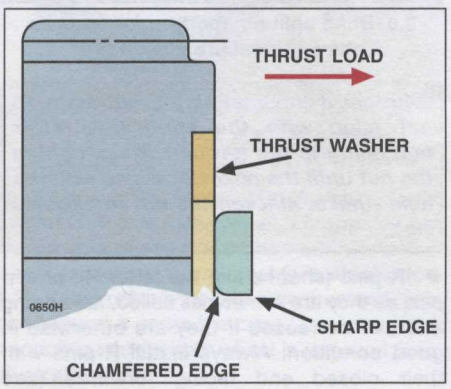

2.9 Correct fitting of a stamped circlip

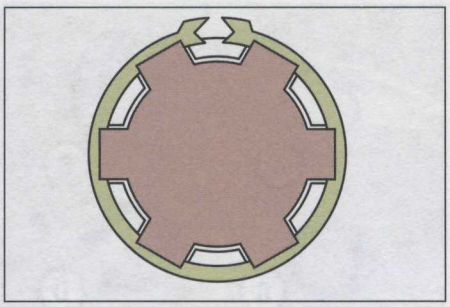

2.10 Align circlip opening with shaft channel

● Circlips can wear due to the thrust of components and become loose in their grooves, with the subsequent danger of becoming dislodged in operation. For this reason, renewal is advised every time a circlip is disturbed.


● Wire circlips are commonly used as piston pin retaining clips. If a removal tang is provided, long-nosed pliers can be used to dislodge them, otherwise careful use of a small flat-bladed screwdriver is necessary. Wire circlips should be renewed every time they are disturbed.

Thread diameter and pitch


● Diameter of a male thread (screw, bolt or stud) is the outside diameter of the threaded portion **(see illustration 2.11)**. Most motorcycle manufacturers use the ISO (International Standards Organisation) metric system expressed in millimetres, eg M6 refers to a 6 mm diameter thread. Sizing is the same for nuts, except that the thread diameter is measured across the valleys of the nut.

● Pitch is the distance between the peaks of the thread **(see illustration 2.11)**. It is expressed in millimetres, thus a common bolt size may be expressed as 6.0 x 1.0 mm (6 mm thread diameter and 1 mm pitch). Generally pitch increases in proportion to thread diameter, although there are always exceptions.

● Thread diameter and pitch are related for conventional fastener applications and the accompanying table can be used as a guide. Additionally, the AF (Across Flats), spanner or socket size dimension of the bolt or nut **(see illustration 2.11)** is linked to thread and pitch specification. Thread pitch can be measured with a thread gauge **(see illustration 2.12)**.

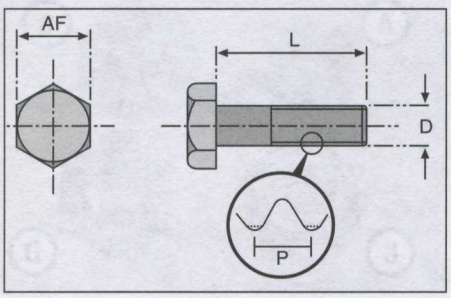

2.11 Fastener length (L), thread diameter (D), thread pitch (P) and head size (AF)

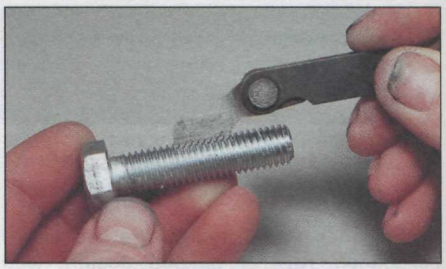

2.12 Using a thread gauge to measure pitch

AF size	Thread diameter x pitch (mm)
8 mm	M5 x 0.8
8 mm	M6 x 1.0
10 mm	M6 x 1.0
12 mm	M8 x 1.25
14 mm	M10 x 1.25
17 mm	M12 x 1.25

● The threads of most fasteners are of the right-hand type, ie they are turned clockwise to tighten and anti-clockwise to loosen. The reverse situation applies to left-hand thread fasteners, which are turned anti-clockwise to tighten and clockwise to loosen. Left-hand threads are used where rotation of a component might loosen a conventional right-hand thread fastener.

Seized fasteners

● Corrosion of external fasteners due to water or reaction between two dissimilar metals can occur over a period of time. It will build up sooner in wet conditions or in countries where salt is used on the roads during the winter. If a fastener is severely corroded it is likely that normal methods of removal will fail and result in its head being ruined. When you attempt removal, the fastener thread should be heard to crack free and unscrew easily - if it doesn't, stop there before damaging something.


● A smart tap on the head of the fastener will often succeed in breaking free corrosion which has occurred in the threads **(see illustration 2.13)**.

● An aerosol penetrating fluid (such as WD-40) applied the night beforehand may work its way down into the thread and ease removal. Depending on the location, you may be able to make up a Plasticine well around the fastener head and fill it with penetrating fluid.




2.13 A sharp tap on the head of a fastener will often break free a corroded thread

● If you are working on an engine internal component, corrosion will most likely not be a problem due to the well lubricated environment. However, components can be very tight and an impact driver is a useful tool in freeing them **(see illustration 2.14)**.

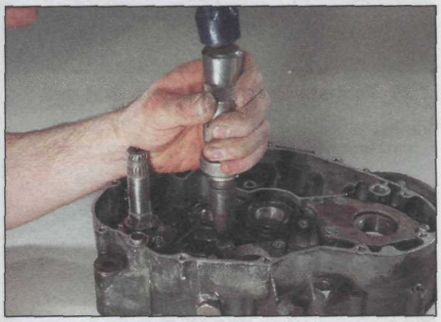

2.14 Using an impact driver to free a fastener


● Where corrosion has occurred between dissimilar metals (eg steel and aluminium alloy), the application of heat to the fastener head will create a disproportionate expansion rate between the two metals and break the seizure caused by the corrosion. Whether heat can be applied depends on the location of the fastener - any surrounding components likely to be damaged must first be removed **(see illustration 2.15)**. Heat can be applied using a paint stripper heat gun or clothes iron, or by immersing the component in boiling water - wear protective gloves to prevent scalding or burns to the hands.

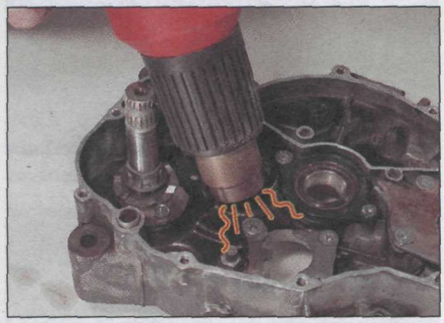

2.15 Using heat to free a seized fastener

● As a last resort, it is possible to use a hammer and cold chisel to work the fastener head unscrewed **(see illustration 2.16)**. This will damage the fastener, but more importantly extreme care must be taken not to damage the surrounding component.


Caution: Remember that the component being secured is generally of more value than the bolt, nut or screw - when the fastener is freed, do not unscrew it with force, instead work the fastener back and forth when resistance is felt to prevent thread damage.

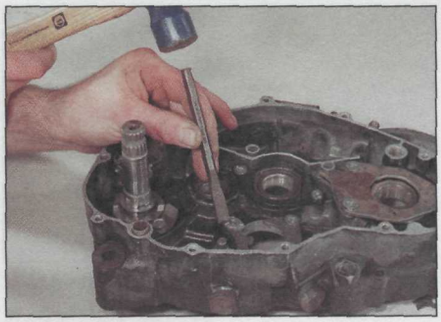

2.16 Using a hammer and chisel to free a seized fastener

Broken fasteners and damaged heads

● If the shank of a broken bolt or screw is accessible you can grip it with self-locking grips. The knurled wheel type stud extractor tool or self-gripping stud puller tool is particularly useful for removing the long studs which screw into the cylinder mouth surface of the crankcase or bolts and screws from which the head has broken off **(see illustration 2.17)**. Studs can also be removed by locking two nuts together on the threaded end of the stud and using a spanner on the lower nut **(see illustration 2.18)**.

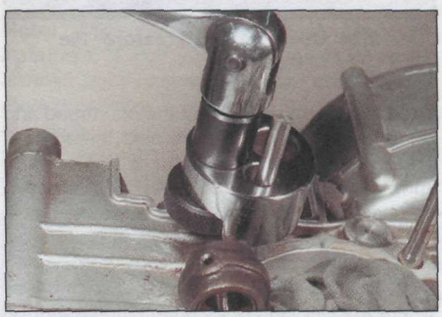


2.17 Using a stud extractor tool to remove a broken crankcase stud



2.18 Two nuts can be locked together to unscrew a stud from a component

● A bolt or screw which has broken off below or level with the casing must be extracted using a screw extractor set. Centre punch the fastener to centralise the drill bit, then drill a hole in the fastener **(see illustration 2.19)**. Select a drill bit which is approximately half to three-quarters the diameter of the fastener and drill to a depth which will accommodate the extractor. Use the largest size extractor possible, but avoid leaving too small a wall thickness otherwise the extractor will merely force the fastener walls outwards wedging it in the casing thread.

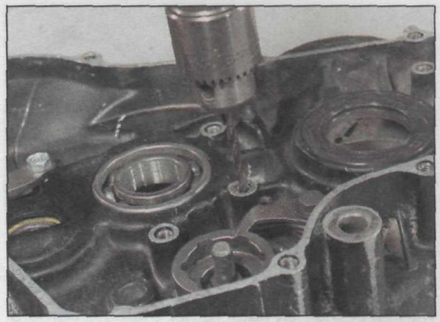

2.19 When using a screw extractor, first drill a hole in the fastener . . .

● If a spiral type extractor is used, thread it anti-clockwise into the fastener. As it is screwed in, it will grip the fastener and unscrew it from the casing **(see illustration 2.20)**.



2.20 . . . then thread the extractor anti-clockwise into the fastener

● If a taper type extractor is used, tap it into the fastener so that it is firmly wedged in place. Unscrew the extractor (anti-clockwise) to draw the fastener out.

Warning: Stud extractors are very hard and may break off in the fastener if care is not taken - ask an engineer about spark erosion if this happens.

● Alternatively, the broken bolt/screw can be drilled out and the hole retapped for an oversize bolt/screw or a diamond-section thread insert. It is essential that the drilling is carried out squarely and to the correct depth, otherwise the casing may be ruined - if in doubt, entrust the work to an engineer.


● Bolts and nuts with rounded corners cause the correct size spanner or socket to slip when force is applied. Of the types of spanner/socket available always use a six-point type rather than an eight or twelve-point type - better grip



2.21 Comparison of surface drive ring spanner (left) with 12-point type (right)

is obtained. Surface drive spanners grip the middle of the hex flats, rather than the corners, and are thus good in cases of damaged heads **(see illustration 2.21)**.

● Slotted-head or Phillips-head screws are often damaged by the use of the wrong size screwdriver. Allen-head and Torx-head screws are much less likely to sustain damage. If enough of the screw head is exposed you can use a hacksaw to cut a slot in its head and then use a conventional flat-bladed screwdriver to remove it. Alternatively use a hammer and cold chisel to tap the head of the fastener around to slacken it. Always replace damaged fasteners with new ones, preferably Torx or Allen-head type.

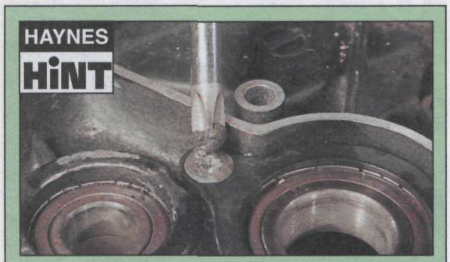

HAYNES HiNT

A dab of valve grinding compound between the screw head and screwdriver tip will often give a good grip.

Thread repair

● Threads (particularly those in aluminium alloy components) can be damaged by overtightening, being assembled with dirt in the threads, or from a component working loose and vibrating. Eventually the thread will fail completely, and it will be impossible to tighten the fastener.

● If a thread is damaged or clogged with old locking compound it can be renovated with a thread repair tool (thread chaser) **(see illustrations 2.22 and 2.23);** special thread




2.22 A thread repair tool being used to correct an internal thread



2.23 A thread repair tool being used to correct an external thread


chasers are available for spark plug hole threads. The tool will not cut a new thread, but clean and true the original thread. Make sure that you use the correct diameter and pitch tool. Similarly, external threads can be cleaned up with a die or a thread restorer file **(see illustration 2.24)**.

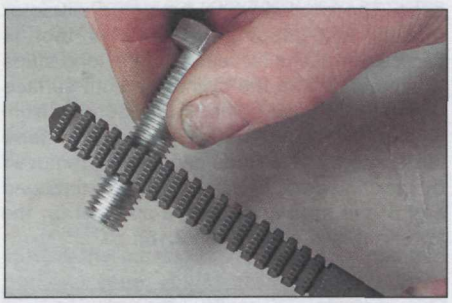


2.24 Using a thread restorer file

● It is possible to drill out the old thread and retap the component to the next thread size. This will work where there is enough surrounding material and a new bolt or screw can be obtained. Sometimes, however, this is not possible - such as where the bolt/screw passes through another component which must also be suitably modified, also in cases where a spark plug or oil drain plug cannot be obtained in a larger diameter thread size.


● The diamond-section thread insert (often known by its popular trade name of Heli-Coil) is a simple and effective method of renewing the thread and retaining the original size. A kit can be purchased which contains the tap, insert and installing tool **(see illustration 2.25)**. Drill out the damaged thread with the size drill specified **(see illustration 2.26)**. Carefully retap the thread **(see illustration 2.27)**. Install the

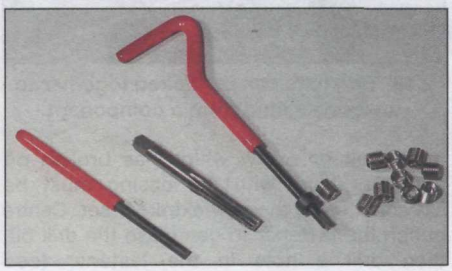

2.25 Obtain a thread insert kit to suit the thread diameter and pitch required

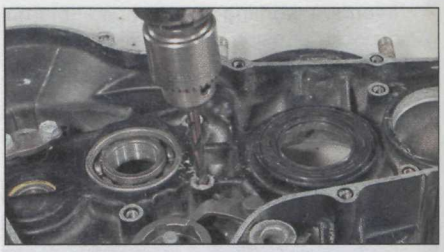

2.26 To install a thread insert, first drill out the original thread . . .

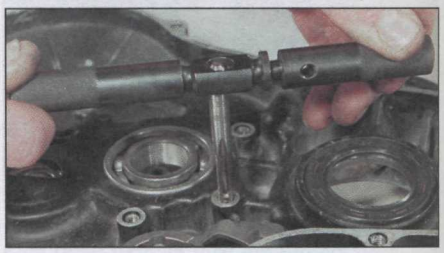

2.27 . . . tap a new thread . . .



2.28 . . . fit insert on the installing tool . . .



2.29 . . . and thread into the component . . .



2.30 . . . break off the tang when complete

insert on the installing tool and thread it slowly into place using a light downward pressure **(see illustrations 2.28 and 2.29)**. When positioned between a 1/4 and 1/2 turn below the surface withdraw the installing tool and use the break-off tool to press down on the tang, breaking it off **(see illustration 2.30)**.

● There are epoxy thread repair kits on the market which can rebuild stripped internal threads, although this repair should not be used on high load-bearing components.

Thread locking and sealing compounds

- Locking compounds are used in locations where the fastener is prone to loosening due to vibration or on important safety-related items which might cause loss of control of the motorcycle if they fail. It is also used where important fasteners cannot be secured by other means such as lockwashers or split pins.
- Before applying locking compound, make sure that the threads (internal and external) are clean and dry with all old compound removed. Select a compound to suit the component being secured - a non-permanent general locking and sealing type is suitable for most applications, but a high strength type is needed for permanent fixing of studs in castings. Apply a drop or two of the compound to the first few threads of the fastener, then thread it into place and tighten to the specified torque. Do not apply excessive thread locking compound otherwise the thread may be damaged on subsequent removal.
- Certain fasteners are impregnated with a dry film type coating of locking compound on their threads. Always renew this type of fastener if disturbed.
- Anti-seize compounds, such as copper-based greases, can be applied to protect threads from seizure due to extreme heat and corrosion. A common instance is spark plug threads and exhaust system fasteners.

3 Measuring tools and gauges

Feeler gauges

- Feeler gauges (or blades) are used for measuring small gaps and clearances **(see illustration 3.1)**. They can also be used to measure endfloat (sideplay) of a component on a shaft where access is not possible with a dial gauge.
- Feeler gauge sets should be treated with care and not bent or damaged. They are etched with their size on one face. Keep them clean and very lightly oiled to prevent corrosion build-up.



3.1 Feeler gauges are used for measuring small gaps and clearances - thickness is marked on one face of gauge

- When measuring a clearance, select a gauge which is a light sliding fit between the two components. You may need to use two gauges together to measure the clearance accurately.


Micrometers

- A micrometer is a precision tool capable of measuring to 0.01 or 0.001 of a millimetre. It should always be stored in its case and not in the general toolbox. It must be kept clean and never dropped, otherwise its frame or measuring anvils could be distorted resulting in inaccurate readings.
- External micrometers are used for measuring outside diameters of components and have many more applications than internal micrometers. Micrometers are available in different size ranges, eg 0 to 25 mm, 25 to 50 mm, and upwards in 25 mm steps; some large micrometers have interchangeable anvils to allow a range of measurements to be taken. Generally the largest precision measurement you are likely to take on a motorcycle is the piston diameter.
- Internal micrometers (or bore micrometers) are used for measuring inside diameters, such as valve guides and cylinder bores. Telescoping gauges and small hole gauges are used in conjunction with an external micrometer, whereas the more expensive internal micrometers have their own measuring device.

External micrometer


Note: *The conventional analogue type instrument is described. Although much easier to read, digital micrometers are considerably more expensive.*

- Always check the calibration of the micrometer before use. With the anvils closed (0 to 25 mm type) or set over a test gauge (for the larger types) the scale should read zero **(see illustration 3.2)**; make sure that the anvils (and test piece) are clean first. Any discrepancy can be adjusted by referring to the instructions supplied with the tool. Remember that the micrometer is a precision measuring tool - don't force the anvils closed, use the ratchet (4) on the end of the micrometer to close it. In this way, a measured force is always applied.

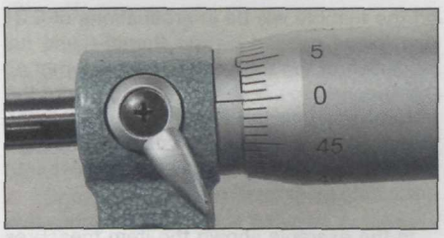

3.2 Check micrometer calibration before use

- To use, first make sure that the item being measured is clean. Place the anvil of the micrometer (1) against the item and use the thimble (2) to bring the spindle (3) lightly into contact with the other side of the item **(see illustration 3.3)**. Don't tighten the thimble down because this will damage the micrometer - instead use the ratchet (4) on the end of the micrometer. The ratchet mechanism applies a measured force preventing damage to the instrument.
- The micrometer is read by referring to the linear scale on the sleeve and the annular scale on the thimble. Read off the sleeve first to obtain the base measurement, then add the fine measurement from the thimble to obtain the overall reading. The linear scale on the sleeve represents the measuring range of the micrometer (eg 0 to 25 mm). The annular scale

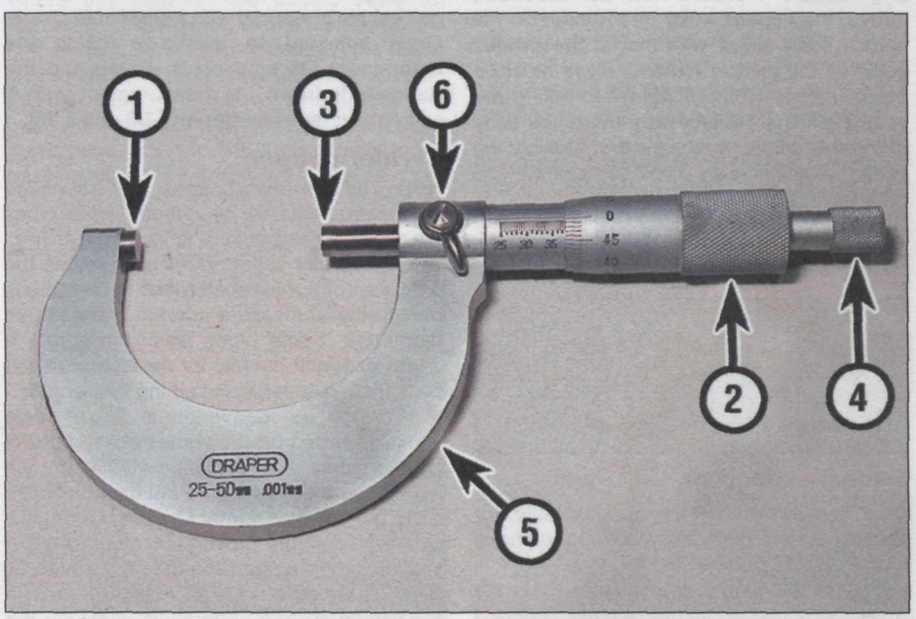


3.3 Micrometer component parts

1 *Anvil*
2 *Thimble*
3 *Spindle*
4 *Ratchet*
5 *Frame*
6 *Locking lever*


on the thimble will be in graduations of 0.01 mm (or as marked on the frame) - one full revolution of the thimble will move 0.5 mm on the linear scale. Take the reading where the datum line on the sleeve intersects the thimble's scale. Always position the eye directly above the scale otherwise an inaccurate reading will result.

In the example shown the item measures 2.95 mm **(see illustration 3.4)**:


Linear scale	2.00 mm
Linear scale	0.50 mm
Annular scale	0.45 mm
Total figure	**2.95 mm**

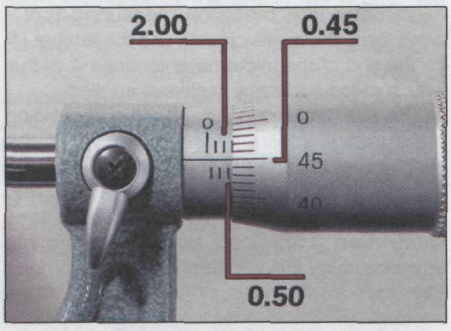


3.4 Micrometer reading of 2.95 mm

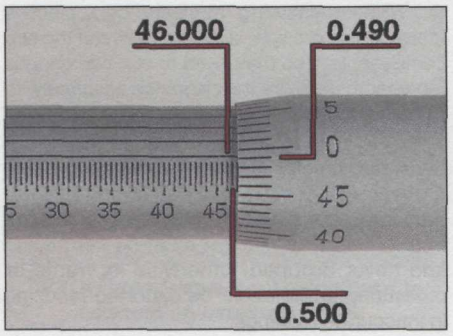


3.5 Micrometer reading of 46.99 mm on linear and annular scales . . .

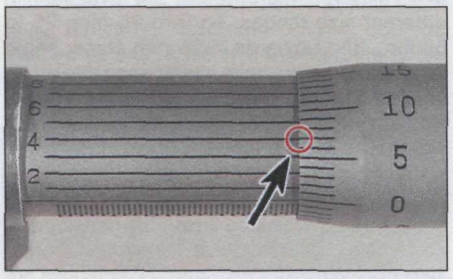

3.6 . . . and 0.004 mm on vernier scale

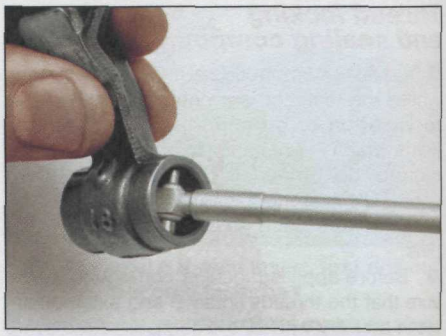

3.7 Expand the telescoping gauge in the bore, lock its position . . .

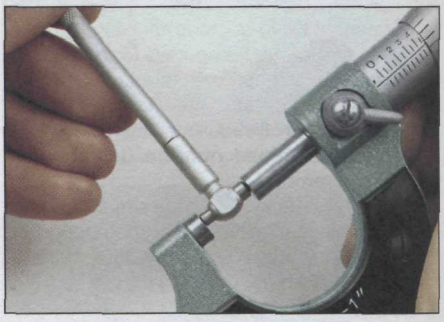

3.8 . . . then measure the gauge with a micrometer

Most micrometers have a locking lever (6) on the frame to hold the setting in place, allowing the item to be removed from the micrometer.

● Some micrometers have a vernier scale on their sleeve, providing an even finer measurement to be taken, in 0.001 increments of a millimetre. Take the sleeve and thimble measurement as described above, then check which graduation on the vernier scale aligns with that of the annular scale on the thimble **Note:** *The eye must be perpendicular to the scale when taking the vernier reading - if necessary rotate the body of the micrometer to ensure this.* Multiply the vernier scale figure by 0.001 and add it to the base and fine measurement figures.

In the example shown the item measures 46.994 mm **(see illustrations 3.5 and 3.6)**:


Linear scale (base)	46.000 mm
Linear scale (base)	00.500 mm
Annular scale (fine)	00.490 mm
Vernier scale	00.004 mm
Total figure	**46.994 mm**

Internal micrometer

● Internal micrometers are available for measuring bore diameters, but are expensive and unlikely to be available for home use. It is suggested that a set of telescoping gauges and small hole gauges, both of which must be used with an external micrometer, will suffice for taking internal measurements on a motorcycle.

● Telescoping gauges can be used to measure internal diameters of components. Select a gauge with the correct size range, make sure its ends are clean and insert it into the bore. Expand the gauge, then lock its position and withdraw it from the bore **(see illustration 3.7)**. Measure across the gauge ends with a micrometer **(see illustration 3.8)**.

● Very small diameter bores (such as valve guides) are measured with a small hole gauge. Once adjusted to a slip-fit inside the component, its position is locked and the gauge withdrawn for measurement with a micrometer **(see illustrations 3.9 and 3.10)**.

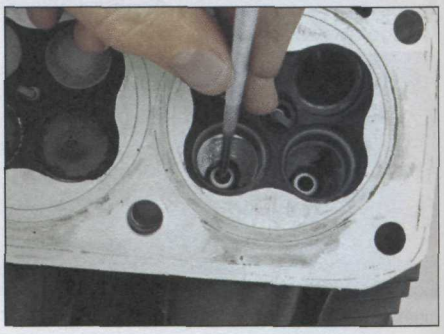

3.9 Expand the small hole gauge in the bore, lock its position . . .




3.10 . . . then measure the gauge with a micrometer

Vernier caliper

Note: *The conventional linear and dial gauge type instruments are described. Digital types are easier to read, but are far more expensive.*

● The vernier caliper does not provide the precision of a micrometer, but is versatile in being able to measure internal and external diameters. Some types also incorporate a depth gauge. It is ideal for measuring clutch plate friction material and spring free lengths.


● To use the conventional linear scale vernier, slacken off the vernier clamp screws (1) and set its jaws over (2), or inside (3), the item to be measured **(see illustration 3.11)**. Slide the jaw into contact, using the thumbwheel (4) for fine movement of the sliding scale (5) then tighten the clamp screws (1). Read off the main scale (6) where the zero on the sliding scale (5) intersects it, taking the whole number to the left of the zero; this provides the base measurement. View along the sliding scale and select the division which lines up exactly with any of the divisions on the main scale, noting that the divisions usually represents 0.02 of a millimetre. Add this fine measurement to the base measurement to obtain the total reading.

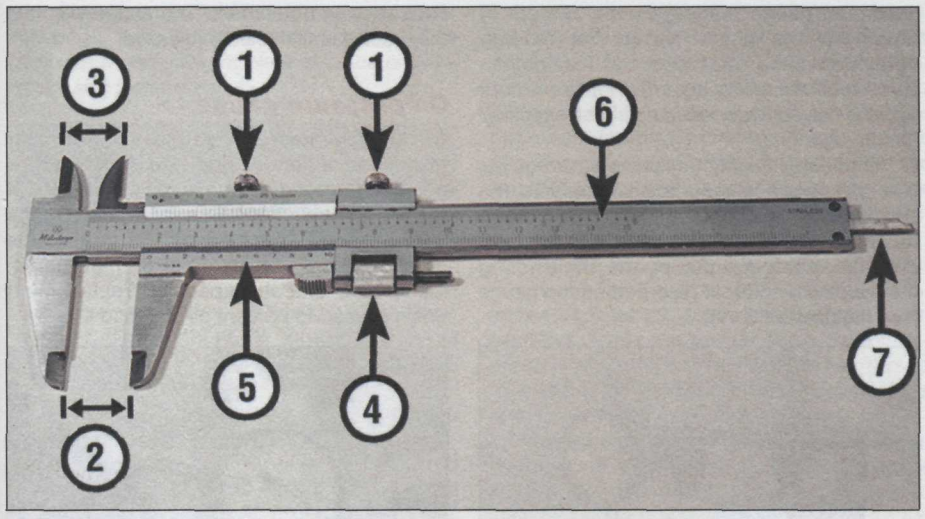


3.11 Vernier component parts (linear gauge)

1 Clamp screws
2 External jaws
3 Internal jaws
4 Thumbwheel
5 Sliding scale
6 Main scale
7 Depth gauge

In the example shown the item measures 55.92 mm **(see illustration 3.12)**:

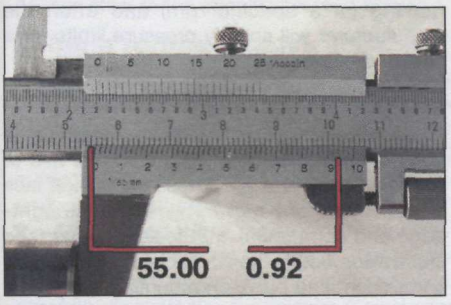

3.12 Vernier gauge reading of 55.92 mm

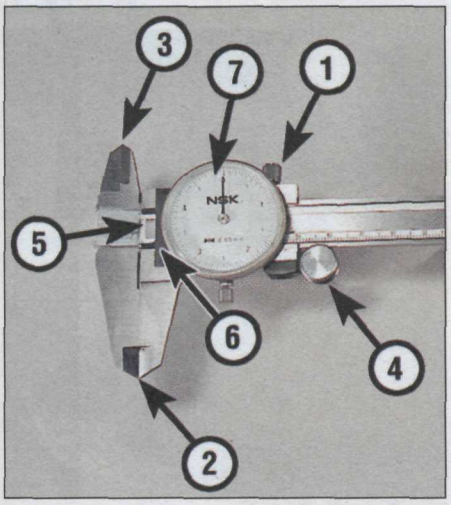

3.13 Vernier component parts (dial gauge)


1 Clamp screw
2 External jaws
3 Internal jaws
4 Thumbwheel
5 Main scale
6 Sliding scale
7 Dial gauge

Base measurement	55.00 mm
Fine measurement	00.92 mm
Total figure	**55.92 mm**

● Some vernier calipers are equipped with a dial gauge for fine measurement. Before use, check that the jaws are clean, then close them fully and check that the dial gauge reads zero. If necessary adjust the gauge ring accordingly. Slacken the vernier clamp screw (1) and set its jaws over (2), or inside (3), the item to be measured **(see illustration 3.13)**. Slide the jaws into contact, using the thumbwheel (4) for fine movement. Read off the main scale (5) where the edge of the sliding scale (6) intersects it, taking the whole number to the left of the zero; this provides the base measurement. Read off the needle position on the dial gauge (7) scale to provide the fine measurement; each division represents 0.05 of a millimetre. Add this fine measurement to the base measurement to obtain the total reading.

In the example shown the item measures 55.95 mm **(see illustration 3.14)**:

Base measurement	55.00 mm
Fine measurement	00.95 mm
Total figure	**55.95 mm**

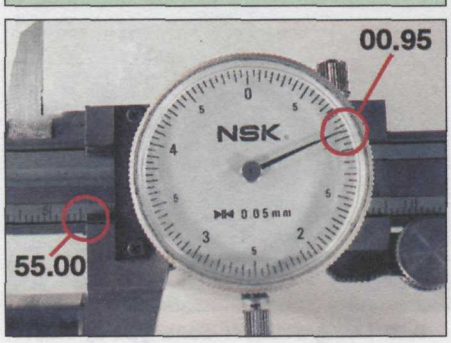


3.14 Vernier gauge reading of 55.95 mm

Plastigauge

● Plastigauge is a plastic material which can be compressed between two surfaces to measure the oil clearance between them. The width of the compressed Plastigauge is measured against a calibrated scale to determine the clearance.

● Common uses of Plastigauge are for measuring the clearance between crankshaft journal and main bearing inserts, between crankshaft journal and big-end bearing inserts, and between camshaft and bearing surfaces. The following example describes big-end oil clearance measurement.

● Handle the Plastigauge material carefully to prevent distortion. Using a sharp knife, cut a length which corresponds with the width of the bearing being measured and place it carefully across the journal so that it is parallel with the shaft **(see illustration 3.15)**. Carefully install both bearing shells and the connecting rod. Without rotating the rod on the journal tighten its bolts or nuts (as applicable) to the specified torque. The connecting rod and bearings are then disassembled and the crushed Plastigauge examined.

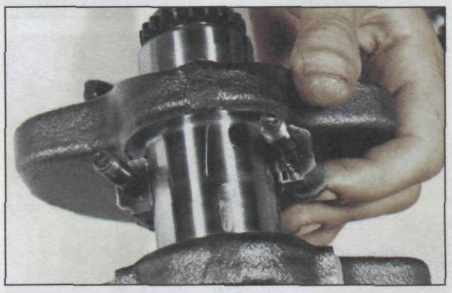

3.15 Plastigauge placed across shaft journal

● Using the scale provided in the Plastigauge kit, measure the width of the material to determine the oil clearance **(see illustration 3.16)**. Always remove all traces of Plastigauge after use using your fingernails.

Caution: Arriving at the correct clearance demands that the assembly is torqued correctly, according to the settings and sequence (where applicable) provided by the motorcycle manufacturer.



3.16 Measuring the width of the crushed Plastigauge

Dial gauge or DTI (Dial Test Indicator)


● A dial gauge can be used to accurately measure small amounts of movement. Typical uses are measuring shaft runout or shaft endfloat (sideplay) and setting piston position for ignition timing on two-strokes. A dial gauge set usually comes with a range of different probes and adapters and mounting equipment.

● The gauge needle must point to zero when at rest. Rotate the ring around its periphery to zero the gauge.

● Check that the gauge is capable of reading the extent of movement in the work. Most gauges have a small dial set in the face which records whole millimetres of movement as well as the fine scale around the face periphery which is calibrated in 0.01 mm divisions. Read off the small dial first to obtain the base measurement, then add the measurement from the fine scale to obtain the total reading.


In the example shown the gauge reads 1.48 mm **(see illustration 3.17)**:

Base measurement	1.00 mm
Fine measurement	0.48 mm
Total figure	**1.48 mm**

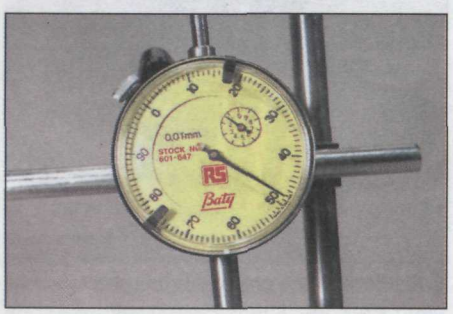


3.17 Dial gauge reading of 1.48 mm

● If measuring shaft runout, the shaft must be supported in vee-blocks and the gauge mounted on a stand perpendicular to the shaft. Rest the tip of the gauge against the centre of the shaft and rotate the shaft slowly whilst watching the gauge reading **(see illustration 3.18)**. Take several measurements along the length of the shaft and record the maximum gauge reading as the amount of runout in the shaft. **Note:** *The reading obtained will be total runout at that point - some manufacturers specify that the runout figure is halved to compare with their specified runout limit.*

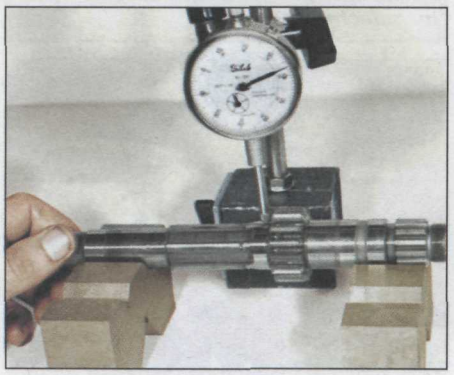

3.18 Using a dial gauge to measure shaft runout

● Endfloat (sideplay) measurement requires that the gauge is mounted securely to the surrounding component with its probe touching the end of the shaft. Using hand pressure, push and pull on the shaft noting the maximum endfloat recorded on the gauge **(see illustration 3.19)**.

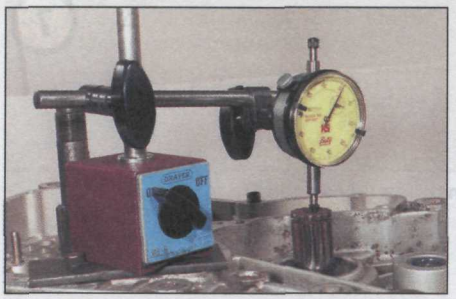

3.19 Using a dial gauge to measure shaft endfloat

● A dial gauge with suitable adapters can be used to determine piston position BTDC on two-stroke engines for the purposes of ignition timing. The gauge, adapter and suitable length probe are installed in the place of the spark plug and the gauge zeroed at TDC. If the piston position is specified as 1.14 mm BTDC, rotate the engine back to 2.00 mm BTDC, then slowly forwards to 1.14 mm BTDC.

Cylinder compression gauges

● A compression gauge is used for measuring cylinder compression. Either the rubber-cone type or the threaded adapter type can be used. The latter is preferred to ensure a perfect seal against the cylinder head. A 0 to 300 psi (0 to 20 Bar) type gauge (for petrol/gasoline engines) will be suitable for motorcycles.


● The spark plug is removed and the gauge either held hard against the cylinder head (cone type) or the gauge adapter screwed into the cylinder head (threaded type) **(see illustration 3.20)**. Cylinder compression is measured with the engine turning over, but not running - carry out the compression test as described in *Fault Finding Equipment*. The gauge will hold the reading until manually released.



3.20 Using a rubber-cone type cylinder compression gauge

Oil pressure gauge

● An oil pressure gauge is used for measuring engine oil pressure. Most gauges come with a set of adapters to fit the thread of the take-off point **(see illustration 3.21)**. If the take-off point specified by the motorcycle manufacturer is an external oil pipe union, make sure that the specified replacement union is used to prevent oil starvation.

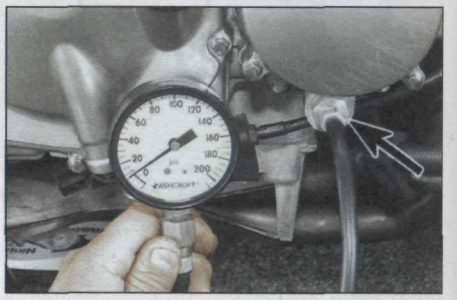

3.21 Oil pressure gauge and take-off point adapter (arrow)


● Oil pressure is measured with the engine running (at a specific rpm) and often the manufacturer will specify pressure limits for a cold and hot engine.

Straight-edge and surface plate

● If checking the gasket face of a component for warpage, place a steel rule or precision straight-edge across the gasket face and measure any gap between the straight-edge and component with feeler gauges **(see illustration 3.22)**. Check diagonally across the component and between mounting holes **(see illustration 3.23)**.



3.22 Use a straight-edge and feeler gauges to check for warpage

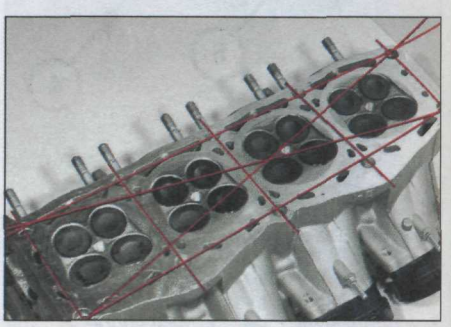

3.23 Check for warpage in these directions

● Checking individual components for warpage, such as clutch plain (metal) plates, requires a perfectly flat plate or piece or plate glass and feeler gauges.

4 Torque and leverage

What is torque?

● Torque describes the twisting force about a shaft. The amount of torque applied is determined by the distance from the centre of the shaft to the end of the lever and the amount of force being applied to the end of the lever; distance multiplied by force equals torque.

● The manufacturer applies a measured torque to a bolt or nut to ensure that it will not slacken in use and to hold two components securely together without movement in the joint. The actual torque setting depends on the thread size, bolt or nut material and the composition of the components being held.

● Too little torque may cause the fastener to loosen due to vibration, whereas too much torque will distort the joint faces of the component or cause the fastener to shear off. Always stick to the specified torque setting.

Using a torque wrench

● Check the calibration of the torque wrench and make sure it has a suitable range for the job. Torque wrenches are available in Nm (Newton-metres), kgf m (kilograms-force metre), lbf ft (pounds-feet), lbf in (inch-pounds). Do not confuse lbf ft with lbf in.

● Adjust the tool to the desired torque on the scale **(see illustration 4.1)**. If your torque wrench is not calibrated in the units specified, carefully convert the figure (see *Conversion Factors*). A manufacturer sometimes gives a torque setting as a range (8 to 10 Nm) rather than a single figure - in this case set the tool midway between the two settings. The same torque may be expressed as 9 Nm ± 1 Nm. Some torque wrenches have a method of locking the setting so that it isn't inadvertently altered during use.



4.1 Set the torque wrench index mark to the setting required, in this case 12 Nm

● Install the bolts/nuts in their correct location and secure them lightly. Their threads must be clean and free of any old locking compound. Unless specified the threads and flange should be dry - oiled threads are necessary in certain circumstances and the manufacturer will take this into account in the specified torque figure. Similarly, the manufacturer may also specify the application of thread-locking compound.

● Tighten the fasteners in the specified sequence until the torque wrench clicks, indicating that the torque setting has been reached. Apply the torque again to double-check the setting. Where different thread diameter fasteners secure the component, as a rule tighten the larger diameter ones first.

● When the torque wrench has been finished with, release the lock (where applicable) and fully back off its setting to zero - do not leave the torque wrench tensioned. Also, do not use a torque wrench for slackening a fastener.


Angle-tightening

● Manufacturers often specify a figure in degrees for final tightening of a fastener. This usually follows tightening to a specific torque setting.

● A degree disc can be set and attached to the socket **(see illustration 4.2)** or a protractor can be used to mark the angle of movement on the bolt/nut head and the surrounding casting **(see illustration 4.3)**.



4.2 Angle tightening can be accomplished with a torque-angle gauge . . .

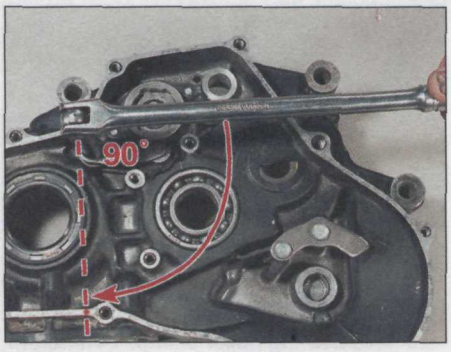


4.3 . . . or by marking the angle on the surrounding component

Loosening sequences

● Where more than one bolt/nut secures a component, loosen each fastener evenly a little at a time. In this way, not all the stress of the joint is held by one fastener and the components are not likely to distort.

● If a tightening sequence is provided, work in the REVERSE of this, but if not, work from the outside in, in a criss-cross sequence **(see illustration 4.4)**.

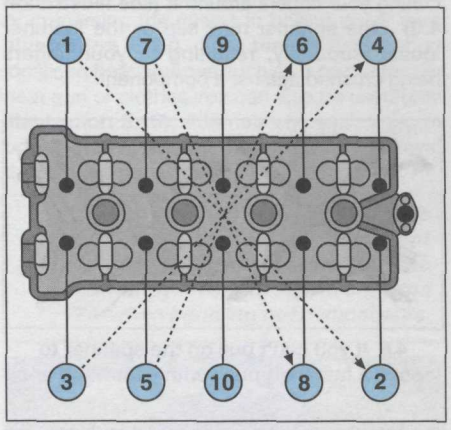


4.4 When slackening, work from the outside inwards

Tightening sequences

● If a component is held by more than one fastener it is important that the retaining bolts/nuts are tightened evenly to prevent uneven stress build-up and distortion of sealing faces. This is especially important on high-compression joints such as the cylinder head.

● A sequence is usually provided by the manufacturer, either in a diagram or actually marked in the casting. If not, always start in the centre and work outwards in a criss-cross pattern **(see illustration 4.5)**. Start off by securing all bolts/nuts finger-tight, then set the torque wrench and tighten each fastener by a small amount in sequence until the final torque is reached. By following this practice,

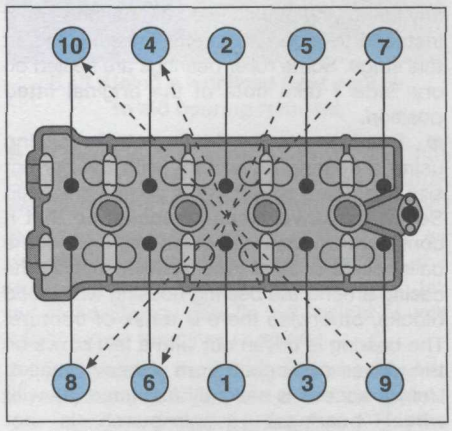


4.5 When tightening, work from the inside outwards

the joint will be held evenly and will not be distorted. Important joints, such as the cylinder head and big-end fasteners often have two- or three-stage torque settings.

Applying leverage

- Use tools at the correct angle. Position a socket wrench or spanner on the bolt/nut so that you pull it towards you when loosening. If this can't be done, push the spanner without curling your fingers around it **(see illustration 4.6)** - *the spanner may slip or the fastener loosen suddenly, resulting in your fingers being crushed against a component.*

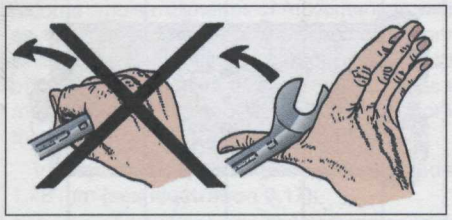

4.6 If you can't pull on the spanner to loosen a fastener, push with your hand open


- Additional leverage is gained by extending the length of the lever. The best way to do this is to use a breaker bar instead of the regular length tool, or to slip a length of tubing over the end of the spanner or socket wrench.
- If additional leverage will not work, the fastener head is either damaged or firmly corroded in place (see *Fasteners*).

5 Bearings


Bearing removal and installation

Drivers and sockets

- Before removing a bearing, always inspect the casing to see which way it must be driven out - some casings will have retaining plates or a cast step. Also check for any identifying markings on the bearing and if installed to a certain depth, measure this at this stage. Some roller bearings are sealed on one side - take note of the original fitted position.
- Bearings can be driven out of a casing using a bearing driver tool (with the correct size head) or a socket of the correct diameter. Select the driver head or socket so that it contacts the outer race of the bearing, not the balls/rollers or inner race. Always support the casing around the bearing housing with wood blocks, otherwise there is a risk of fracture. *The bearing is driven out with a few blows on* the driver or socket from a heavy mallet. Unless access is severely restricted (as with wheel bearings), a pin-punch is not recommended unless it is moved around the bearing to keep it square in its housing.
- The same equipment can be used to install bearings. Make sure the bearing housing is supported on wood blocks and line up the bearing in its housing. Fit the bearing as noted on removal - generally they are installed with their marked side facing outwards. Tap the bearing squarely into its housing using a driver or socket which bears only on the bearing's outer race - contact with the bearing balls/rollers or inner race will destroy it **(see illustrations 5.1 and 5.2)**.
- Check that the bearing inner race and balls/rollers rotate freely.

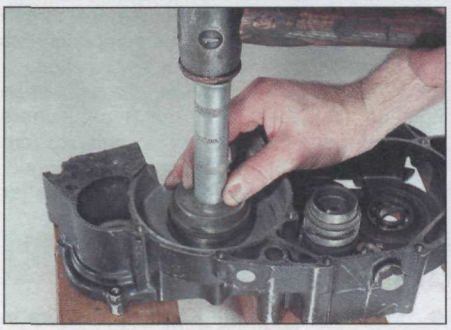

5.1 Using a bearing driver against the bearing's outer race

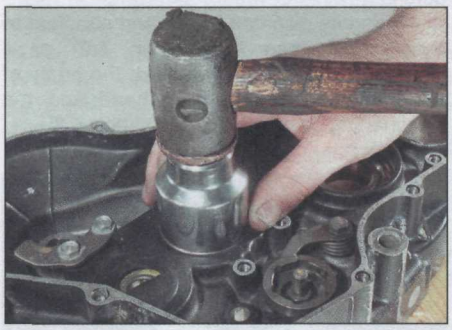

5.2 Using a large socket against the bearing's outer race


Pullers and slide-hammers

- Where a bearing is pressed on a shaft a puller will be required to extract it **(see illustration 5.3)**. Make sure that the puller clamp or legs fit securely behind the bearing and are unlikely to slip out. If pulling a bearing off a gear shaft for example, you may have to locate the puller behind a gear pinion if there is no access to the race and draw the gear pinion off the shaft as well **(see illustration 5.4)**.



5.3 This bearing puller clamps behind the bearing and pressure is applied to the shaft end to draw the bearing off

Caution: Ensure that the puller's centre bolt locates securely against the end of the shaft and will not slip when pressure is applied. Also ensure that puller does not damage the shaft end.

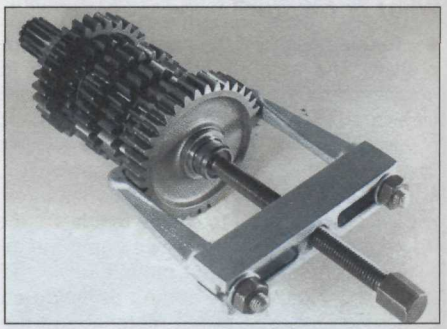

5.4 Where no access is available to the rear of the bearing, it is sometimes possible to draw off the adjacent component

- Operate the puller so that its centre bolt exerts pressure on the shaft end and draws the bearing off the shaft.
- When installing the bearing on the shaft, tap only on the bearing's inner race - contact with the balls/rollers or outer race with destroy the bearing. Use a socket or length of tubing as a drift which fits over the shaft end **(see illustration 5.5)**.




5.5 When installing a bearing on a shaft use a piece of tubing which bears only on the bearing's inner race

- Where a bearing locates in a blind hole in a casing, it cannot be driven or pulled out as described above. A slide-hammer with knife-edged bearing puller attachment will be required. The puller attachment passes through the bearing and when tightened expands to fit firmly behind the bearing **(see *illustration 5.6*)**. *By operating the slide-*hammer part of the tool the bearing is jarred out of its housing **(see illustration 5.7)**.
- It is possible, if the bearing is of reasonable weight, for it to drop out of its housing if the casing is heated as described opposite. If this




5.6 Expand the bearing puller so that it locks behind the bearing . . .

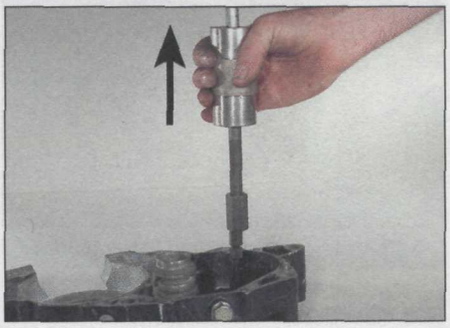

5.7 . . . attach the slide hammer to the bearing puller

method is attempted, first prepare a work surface which will enable the casing to be tapped face down to help dislodge the bearing - a wood surface is ideal since it will not damage the casing's gasket surface. Wearing protective gloves, tap the heated casing several times against the work surface to dislodge the bearing under its own weight **(see illustration 5.8)**.

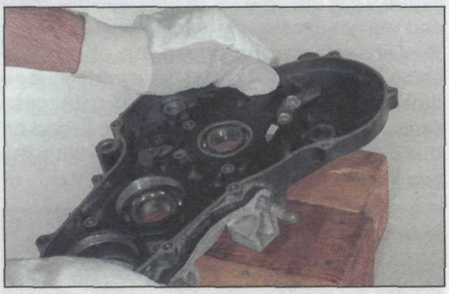


5.8 Tapping a casing face down on wood blocks can often dislodge a bearing

- Bearings can be installed in blind holes using the driver or socket method described above.

Drawbolts

- Where a bearing or bush is set in the eye of a component, such as a suspension linkage arm or connecting rod small-end, removal by drift may damage the component. Furthermore, a rubber bushing in a shock absorber eye cannot successfully be driven out of position. If access is available to a engineering press, the task is straightforward. If not, a drawbolt can be fabricated to extract the bearing or bush.

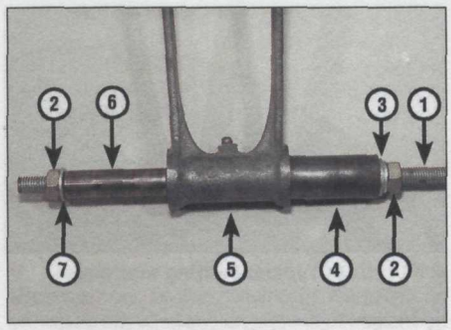


5.9 Drawbolt component parts assembled on a suspension arm

1 *Bolt or length of threaded bar*
2 *Nuts*
3 *Washer (external diameter greater than tubing internal diameter)*
4 *Tubing (internal diameter sufficient to accommodate bearing)*
5 *Suspension arm with bearing*
6 *Tubing (external diameter slightly smaller than bearing)*
7 *Washer (external diameter slightly smaller than bearing)*



5.10 Drawing the bearing out of the suspension arm

- To extract the bearing/bush you will need a long bolt with nut (or piece of threaded bar with two nuts), a piece of tubing which has an internal diameter larger than the bearing/bush, another piece of tubing which has an external diameter slightly smaller than the bearing/bush, and a selection of washers **(see illustrations 5.9 and 5.10)**. Note that the pieces of tubing must be of the same length, or longer, than the bearing/bush.
- The same kit (without the pieces of tubing) can be used to draw the new bearing/bush back into place **(see illustration 5.11)**.

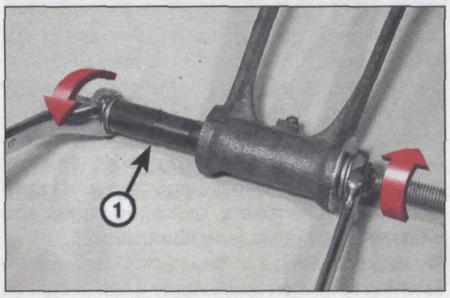


5.11 Installing a new bearing (1) in the suspension arm


Temperature change

- If the bearing's outer race is a tight fit in the casing, the aluminium casing can be heated to release its grip on the bearing. Aluminium will expand at a greater rate than the steel bearing outer race. There are several ways to do this, but avoid any localised extreme heat (such as a blow torch) - aluminium alloy has a low melting point.
- Approved methods of heating a casing are using a domestic oven (heated to 100°C) or immersing the casing in boiling water **(see illustration 5.12)**. Low temperature range localised heat sources such as a paint stripper heat gun or clothes iron can also be used **(see illustration 5.13)**. Alternatively, soak a rag in boiling water, wring it out and wrap it around the bearing housing.

Warning: All of these methods require care in use to prevent scalding and burns to the hands. Wear protective gloves when handling hot components.

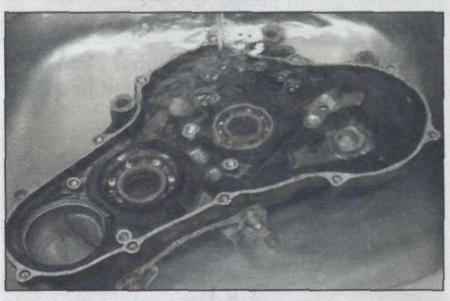

5.12 A casing can be immersed in a sink of boiling water to aid bearing removal

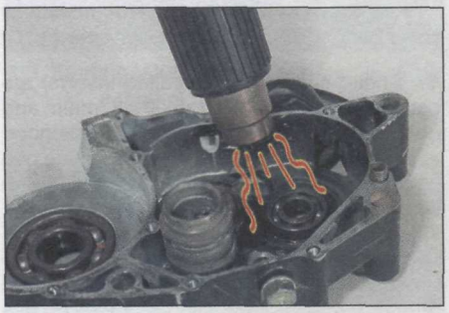


5.13 Using a localised heat source to aid bearing removal

- If heating the whole casing note that plastic components, such as the neutral switch, may suffer - remove them beforehand.
- After heating, remove the bearing as described above. You may find that the expansion is sufficient for the bearing to fall out of the casing under its own weight or with a light tap on the driver or socket.
- If necessary, the casing can be heated to aid bearing installation, and this is sometimes the recommended procedure if the motorcycle manufacturer has designed the housing and bearing fit with this intention.


● Installation of bearings can be eased by placing them in a freezer the night before installation. The steel bearing will contract slightly, allowing easy insertion in its housing. This is often useful when installing steering head outer races in the frame.

Bearing types and markings

● Plain shell bearings, ball bearings, needle roller bearings and tapered roller bearings will all be found on motorcycles **(see illustrations 5.14 and 5.15)**. The ball and roller types are usually caged between an inner and outer race, but uncaged variations may be found.

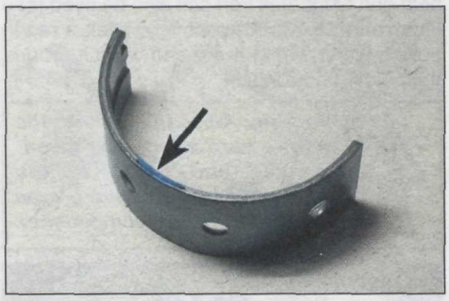

5.14 Shell bearings are either plain or grooved. They are usually identified by colour code (arrow)

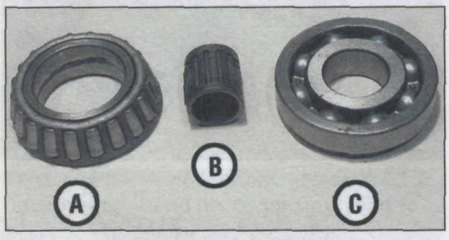

5.15 Tapered roller bearing (A), needle roller bearing (B) and ball journal bearing (C)

● Shell bearings (often called inserts) are usually found at the crankshaft main and connecting rod big-end where they are good at coping with high loads. They are made of a phosphor-bronze material and are impregnated with self-lubricating properties.

● Ball bearings and needle roller bearings consist of a steel inner and outer race with the balls or rollers between the races. They require constant lubrication by oil or grease and are good at coping with axial loads. Taper roller bearings consist of rollers set in a tapered cage set on the inner race; the outer race is separate. They are good at coping with axial loads and prevent movement along the shaft - a typical application is in the steering head.

● Bearing manufacturers produce bearings to ISO size standards and stamp one face of the bearing to indicate its internal and external diameter, load capacity and type **(see illustration 5.16)**.

● Metal bushes are usually of phosphor-bronze material. Rubber bushes are used in suspension mounting eyes. Fibre bushes have also been used in suspension pivots.




5.16 Typical bearing marking

Bearing fault finding

● If a bearing outer race has spun in its housing, the housing material will be damaged. You can use a bearing locking compound to bond the outer race in place if damage is not too severe.

● Shell bearings will fail due to damage of their working surface, as a result of lack of lubrication, corrosion or abrasive particles in the oil **(see illustration 5.17)**. Small particles of dirt in the oil may embed in the bearing material whereas larger particles will score the bearing and shaft journal. If a number of short journeys are made, insufficient heat will be generated to drive off condensation which has built up on the bearings.

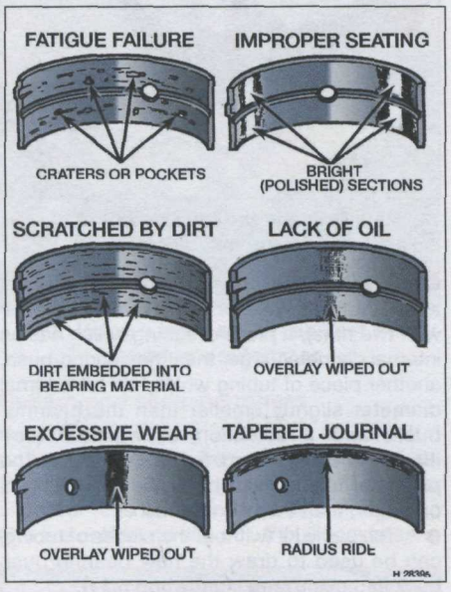

5.17 Typical bearing failures

● Ball and roller bearings will fail due to lack of lubrication or damage to the balls or rollers. Tapered-roller bearings can be damaged by overloading them. Unless the bearing is sealed on both sides, wash it in paraffin (kerosene) to remove all old grease then allow it to dry. Make a visual inspection looking to dented balls or rollers, damaged cages and worn or pitted races **(see illustration 5.18)**.

● A ball bearing can be checked for wear by listening to it when spun. Apply a film of light oil to the bearing and hold it close to the ear - hold the outer race with one hand and spin the inner race with the other hand **(see illustration 5.19)**. The bearing should be almost silent when spun; if it grates or rattles it is worn.



5.18 Example of ball journal bearing with damaged balls and cages



5.19 Hold outer race and listen to inner race when spun

6 Oil seals

Oil seal removal and installation

● Oil seals should be renewed every time a component is dismantled. This is because the seal lips will become set to the sealing surface and will not necessarily reseal.

● Oil seals can be prised out of position using a large flat-bladed screwdriver **(see illustration 6.1)**. In the case of crankcase seals, check first that the seal is not lipped on the inside, preventing its removal with the crankcases joined.



6.1 Prise out oil seals with a large flat-bladed screwdriver

● New seals are usually installed with their marked face (containing the seal reference code) outwards and the spring side towards the fluid being retained. In certain cases, such as a two-stroke engine crankshaft seal, a double lipped seal may be used due to there being fluid or gas on each side of the joint.

● Use a bearing driver or socket which bears only on the outer hard edge of the seal to install it in the casing - tapping on the inner edge will damage the sealing lip.

Oil seal types and markings

● Oil seals are usually of the single-lipped type. Double-lipped seals are found where a liquid or gas is on both sides of the joint.

● Oil seals can harden and lose their sealing ability if the motorcycle has been in storage for a long period - renewal is the only solution.

● Oil seal manufacturers also conform to the ISO markings for seal size - these are moulded into the outer face of the seal **(see illustration 6.2)**.



6.2 These oil seal markings indicate inside diameter, outside diameter and seal thickness

7 Gaskets and sealants

Types of gasket and sealant

● Gaskets are used to seal the mating surfaces between components and keep lubricants, fluids, vacuum or pressure contained within the assembly. Aluminium gaskets are sometimes found at the cylinder joints, but most gaskets are paper-based. If the mating surfaces of the components being joined are undamaged the gasket can be installed dry, although a dab of sealant or grease will be useful to hold it in place during assembly.

● RTV (Room Temperature Vulcanising) silicone rubber sealants cure when exposed to moisture in the atmosphere. These sealants are good at filling pits or irregular gasket faces, but will tend to be forced out of the joint under very high torque. They can be used to replace a paper gasket, but first make sure that the width of the paper gasket is not essential to the shimming of internal components. RTV sealants should not be used on components containing petrol (gasoline).

● Non-hardening, semi-hardening and hard setting liquid gasket compounds can be used with a gasket or between a metal-to-metal joint. Select the sealant to suit the application: universal non-hardening sealant can be used on virtually all joints; semi-hardening on joint faces which are rough or damaged; hard setting sealant on joints which require a permanent bond and are subjected to high temperature and pressure. **Note:** *Check first if the paper gasket has a bead of sealant impregnated in its surface before applying additional sealant.*

● When choosing a sealant, make sure it is suitable for the application, particularly if being applied in a high-temperature area or in the vicinity of fuel. Certain manufacturers produce sealants in either clear, silver or black colours to match the finish of the engine. This has a particular application on motorcycles where much of the engine is exposed.

● Do not over-apply sealant. That which is squeezed out on the outside of the joint can be wiped off, whereas an excess of sealant on the inside can break off and clog oilways.

Breaking a sealed joint


● Age, heat, pressure and the use of hard setting sealant can cause two components to stick together so tightly that they are difficult to separate using finger pressure alone. Do not resort to using levers unless there is a pry point provided for this purpose **(see illustration 7.1)** or else the gasket surfaces will be damaged.

● Use a soft-faced hammer **(see illustration 7.2)** or a wood block and conventional hammer to strike the component near the mating surface. Avoid hammering against cast extremities since they may break off. If this method fails, try using a wood wedge between the two components.

Caution: If the joint will not separate, double-check that you have removed all the fasteners.



7.1 If a pry point is provided, apply gently pressure with a flat-bladed screwdriver

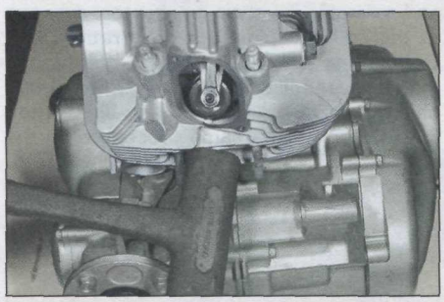

7.2 Tap around the joint with a soft-faced mallet if necessary - don't strike cooling fins

Removal of old gasket and sealant

● Paper gaskets will most likely come away complete, leaving only a few traces stuck on the sealing faces of the components. It is imperative that all traces are removed to ensure correct sealing of the new gasket.

HAYNES HINT



Most components have one or two hollow locating dowels between the two gasket faces. If a dowel cannot be removed, do not resort to gripping it with pliers - it will almost certainly be distorted. Install a close-fitting socket or Phillips screwdriver into the dowel and then grip the outer edge of the dowel to free it.

● Very carefully scrape all traces of gasket away making sure that the sealing surfaces are not gouged or scored by the scraper **(see illustrations 7.3, 7.4 and 7.5)**. Stubborn deposits can be removed by spraying with an aerosol gasket remover. Final preparation of




7.3 Paper gaskets can be scraped off with a gasket scraper tool . . .



7.4 . . . a knife blade . . .



7.5 . . . or a household scraper

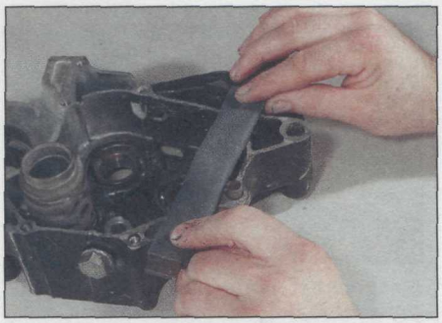

7.6 Fine abrasive paper is wrapped around a flat file to clean up the gasket face



7.7 A kitchen scourer can be used on stubborn deposits

the gasket surface can be made with very fine abrasive paper or a plastic kitchen scourer **(see illustrations 7.6 and 7.7)**.

● Old sealant can be scraped or peeled off components, depending on the type originally used. Note that gasket removal compounds are available to avoid scraping the components clean; make sure the gasket remover suits the type of sealant used.


8 Chains

Breaking and joining final drive chains


● Drive chains for all but small bikes are continuous and do not have a clip-type connecting link. The chain must be broken using a chain breaker tool and the new chain securely riveted together using a new soft rivet-type link. Never use a clip-type connecting link instead of a rivet-type link, except in an emergency. Various chain breaking and riveting tools are available, either as separate tools or combined as illustrated in the accompanying photographs - read the instructions supplied with the tool carefully.

Warning: The need to rivet the new link pins correctly cannot be overstressed - loss of control of the motorcycle is very likely to result if the chain breaks in use.

● Rotate the chain and look for the soft link. The soft link pins look like they have been

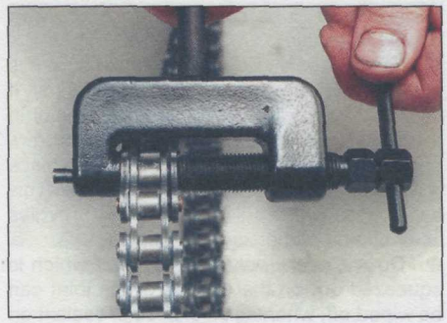

8.1 Tighten the chain breaker to push the pin out of the link . . .

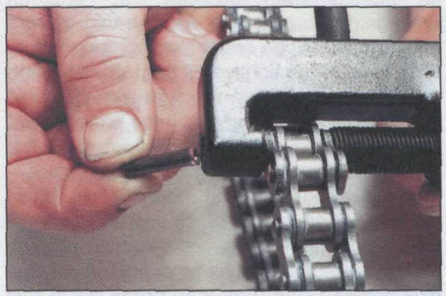

8.2 . . . withdraw the pin, remove the tool . . .



8.3 . . . and separate the chain link

deeply centre-punched instead of peened over like all the other pins **(see illustration 8.9)** and its sideplate may be a different colour. Position the soft link midway between the sprockets and assemble the chain breaker tool over one of the soft link pins **(see illustration 8.1)**. Operate the tool to push the pin out through the chain **(see illustration 8.2)**. On an O-ring chain, remove the O-rings **(see illustration 8.3)**. Carry out the same procedure on the other soft link pin.

Caution: Certain soft link pins (particularly on the larger chains) may require their ends to be filed or ground off before they can be pressed out using the tool.

● Check that you have the correct size and strength (standard or heavy duty) new soft link - do not reuse the old link. Look for the size marking on the chain sideplates **(see illustration 8.10)**.

● Position the chain ends so that they are engaged over the rear sprocket. On an O-ring



8.4 Insert the new soft link, with O-rings, through the chain ends . . .



8.5 . . . install the O-rings over the pin ends . . .




8.6 . . . followed by the sideplate

chain, install a new O-ring over each pin of the link and insert the link through the two chain ends **(see illustration 8.4)**. Install a new O-ring over the end of each pin, followed by the sideplate (with the chain manufacturer's marking facing outwards) **(see illustrations 8.5 and 8.6)**. On an unsealed chain, insert the link through the two chain ends, then install the sideplate with the chain manufacturer's marking facing outwards.

● Note that it may not be possible to install the sideplate using finger pressure alone. If using a joining tool, assemble it so that the plates of the tool clamp the link and press the sideplate over the pins **(see illustration 8.7)**. Otherwise, use two small sockets placed over



8.7 Push the sideplate into position using a clamp

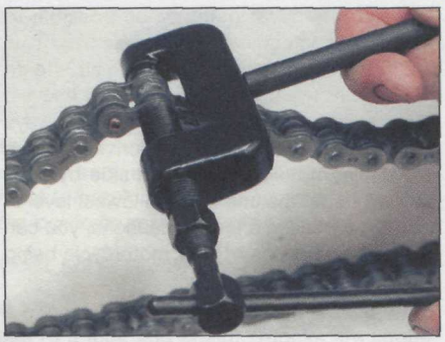

8.8 Assemble the chain riveting tool over one pin at a time and tighten it fully



8.9 Pin end correctly riveted (A), pin end unriveted (B)

the rivet ends and two pieces of the wood between a G-clamp. Operate the clamp to press the sideplate over the pins.

- Assemble the joining tool over one pin (following the maker's instructions) and tighten the tool down to spread the pin end securely **(see illustrations 8.8 and 8.9)**. Do the same on the other pin.


> ***Warning: Check that the pin ends are secure and that there is no danger of the sideplate coming loose. If the pin ends are cracked the soft link must be renewed.***

Final drive chain sizing

- Chains are sized using a three digit number, followed by a suffix to denote the chain type **(see illustration 8.10)**. Chain type is either standard or heavy duty (thicker sideplates), and also unsealed or O-ring/X-ring type.
- The first digit of the number relates to the pitch of the chain, ie the distance from the centre of one pin to the centre of the next pin **(see illustration 8.11)**. Pitch is expressed in eighths of an inch, as follows:



8.10 Typical chain size and type marking

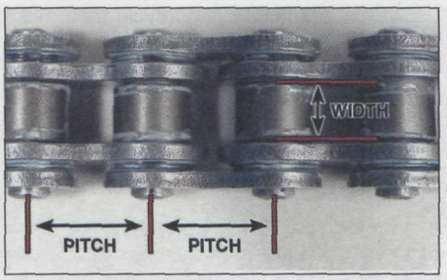

8.11 Chain dimensions

Sizes commencing with a 4 (eg 428) have a pitch of 1/2 inch (12.7 mm)

Sizes commencing with a 5 (eg 520) have a pitch of 5/8 inch (15.9 mm)

Sizes commencing with a 6 (eg 630) have a pitch of 3/4 inch (19.1 mm)

- The second and third digits of the chain size relate to the width of the rollers, again in imperial units, eg the 525 shown has 5/16 inch (7.94 mm) rollers **(see illustration 8.11)**.


9 Hoses

Clamping to prevent flow


- Small-bore flexible hoses can be clamped to prevent fluid flow whilst a component is worked on. Whichever method is used, ensure that the hose material is not permanently distorted or damaged by the clamp.

*a) A brake hose clamp available from auto accessory shops **(see illustration 9.1)**.*

*b) A wingnut type hose clamp **(see illustration 9.2)**.*

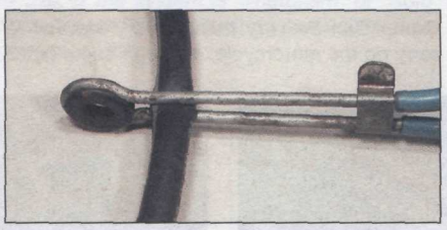


9.1 Hoses can be clamped with an automotive brake hose clamp . . .

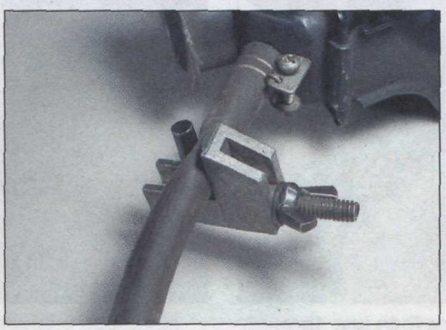

9.2 . . . a wingnut type hose clamp . . .

*c) Two sockets placed each side of the hose and held with straight-jawed self-locking grips **(see illustration 9.3)**.*

*d) Thick card each side of the hose held between straight-jawed self-locking grips **(see illustration 9.4)**.*

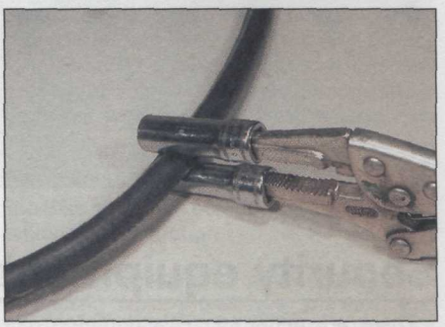

9.3 . . . two sockets and a pair of self-locking grips . . .



9.4 . . . or thick card and self-locking grips

Freeing and fitting hoses

- Always make sure the hose clamp is moved well clear of the hose end. Grip the hose with your hand and rotate it whilst pulling it off the union. If the hose has hardened due to age and will not move, slit it with a sharp knife and peel its ends off the union **(see illustration 9.5)**.
- Resist the temptation to use grease or soap on the unions to aid installation; although it helps the hose slip over the union it will equally aid the escape of fluid from the joint. It is preferable to soften the hose ends in hot water and wet the inside surface of the hose with water or a fluid which will evaporate.



9.5 Cutting a coolant hose free with a sharp knife

Introduction

In less time than it takes to read this introduction, a thief could steal your motorcycle. Returning only to find your bike has gone is one of the worst feelings in the world. Even if the motorcycle is insured against theft, once you've got over the initial shock, you will have the inconvenience of dealing with the police and your insurance company.

The motorcycle is an easy target for the professional thief and the joyrider alike and the official figures on motorcycle theft make for depressing reading; on average a motorcycle is stolen every 16 minutes in the UK!

Motorcycle thefts fall into two categories, those stolen 'to order' and those taken by opportunists. The thief stealing to order will be on the look out for a specific make and model and will go to extraordinary lengths to obtain that motorcycle. The opportunist thief on the other hand will look for easy targets which can be stolen with the minimum of effort and risk.

Whilst it is never going to be possible to make your machine 100% secure, it is estimated that around half of all stolen motorcycles are taken by opportunist thieves. Remember that the opportunist thief is always on the look out for the easy option: if there are two similar motorcycles parked side-by-side, they will target the one with the lowest level of security. By taking a few precautions, you can reduce the chances of your motorcycle being stolen.

Security equipment

There are many specialised motorcycle security devices available and the following text summarises their applications and their good and bad points.

Once you have decided on the type of security equipment which best suits your needs, we recommended that you read one of the many equipment tests regularly carried out by the motorcycle press. These tests compare the products from all the major manufacturers and give impartial ratings on their effectiveness, value-for-money and ease of use.

No one item of security equipment can provide complete protection. It is highly recommended that two or more of the items described below are combined to increase the security of your motorcycle (a lock and chain plus an alarm system is just about ideal). The more security measures fitted to the bike, the less likely it is to be stolen.



Ensure the lock and chain you buy is of good quality and long enough to shackle your bike to a solid object


Lock and chain

Pros: *Very flexible to use; can be used to secure the motorcycle to almost any immovable object. On some locks and chains, the lock can be used on its own as a disc lock (see below).*

Cons: *Can be very heavy and awkward to carry on the motorcycle, although some types will be supplied with a carry bag which can be strapped to the pillion seat.*

- Heavy-duty chains and locks are an excellent security measure **(see illustration 1)**. Whenever the motorcycle is parked, use the lock and chain to secure the machine to a solid, immovable object such as a post or railings. This will prevent the machine from being ridden away or being lifted into the back of a van.

- When fitting the chain, always ensure the chain is routed around the motorcycle frame or swingarm **(see illustrations 2 and 3)**. Never merely pass the chain around one of the wheel rims; a thief may unbolt the wheel and lift the rest of the machine into a van, leaving you with just the wheel! Try to avoid having excess chain free, thus making it difficult to use cutting tools, and keep the chain and lock off the ground to prevent thieves attacking it with a cold chisel. Position the lock so that its lock barrel is facing downwards; this will make it harder for the thief to attack the lock mechanism.

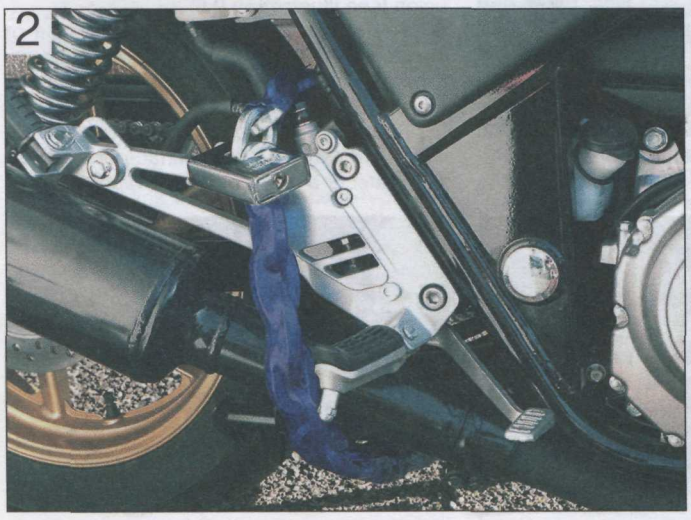

Pass the chain through the bike's frame, rather than just through a wheel . . .



. . . and loop it around a solid object

U-locks

Pros: *Highly effective deterrent which can be used to secure the bike to a post or railings. Most U-locks come with a carrier which allows the lock to be easily carried on the bike.*

Cons: *Not as flexible to use as a lock and chain.*

- These are solid locks which are similar in use to a lock and chain. U-locks are lighter than a lock and chain but not so flexible to use. The length and shape of the lock shackle limit the objects to which the bike can be secured **(see illustration 4)**.

Disc locks

Pros: *Small, light and very easy to carry; most can be stored underneath the seat.*

Cons: *Does not prevent the motorcycle being lifted into a van. Can be very embarrassing if you forget to remove the lock before attempting to ride off!*



A typical disc lock attached through one of the holes in the disc

- Disc locks are designed to be attached to the front brake disc. The lock passes through one of the holes in the disc and prevents the wheel rotating by jamming against the fork/brake caliper **(see illustration 5)**. Some are equipped with an alarm siren which sounds if the disc lock is moved; this not only acts as a theft deterrent but also as a handy reminder if you try to move the bike with the lock still fitted.
- Combining the disc lock with a length of cable which can be looped around a post or railings provides an additional measure of security **(see illustration 6)**.




U-locks can be used to secure the bike to a solid object – ensure you purchase one which is long enough

Alarms and immobilisers

Pros: *Once installed it is completely hassle-free to use. If the system is 'Thatcham' or 'Sold Secure-approved', insurance companies may give you a discount.*

Cons: *Can be expensive to buy and complex to install. No system will prevent the motorcycle from being lifted into a van and taken away.*

- Electronic alarms and immobilisers are available to suit a variety of budgets. There are three different types of system available: pure alarms, pure immobilisers, and the more expensive systems which are combined alarm/immobilisers **(see illustration 7)**.
- An alarm system is designed to emit an audible warning if the motorcycle is being tampered with.
- An immobiliser prevents the motorcycle being started and ridden away by disabling its electrical systems.
- When purchasing an alarm/immobiliser system, check the cost of installing the system unless you are able to do it yourself. If the motorcycle is not used regularly, another consideration is the current drain of the system. All alarm/immobiliser systems are powered by the motorcycle's battery; purchasing a system with a very low current drain could prevent the battery losing its charge whilst the motorcycle is not being used.

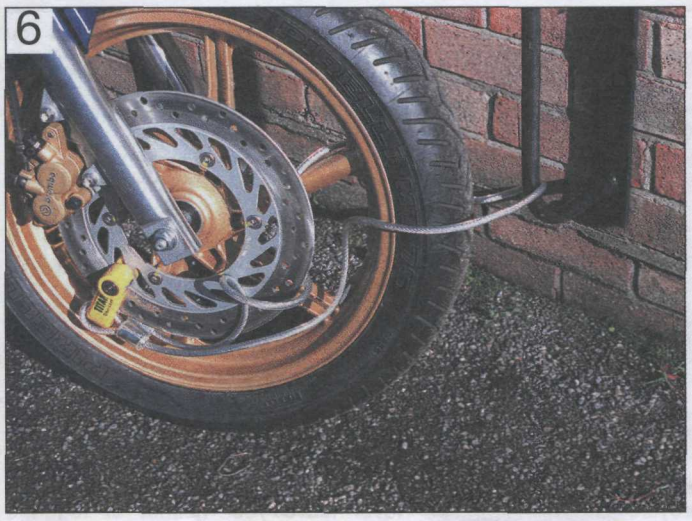

A disc lock combined with a security cable provides additional protection



A typical alarm/immobiliser system



Indelible markings can be applied to most areas of the bike – always apply the manufacturer's sticker to warn off thieves



Chemically-etched code numbers can be applied to main body panels . . .



. . . again, always ensure that the kit manufacturer's sticker is applied in a prominent position

Security marking kits

Pros: *Very cheap and effective deterrent. Many insurance companies will give you a discount on your insurance premium if a recognised security marking kit is used on your motorcycle.*

Cons: *Does not prevent the motorcycle being stolen by joyriders.*

● There are many different types of security marking kits available. The idea is to mark as many parts of the motorcycle as possible with a unique security number **(see illustrations 8, 9 and 10)**. A form will be included with the kit to register your personal details and those of the motorcycle with the kit manufacturer. This register is made available to the police to help them trace the rightful owner of any motorcycle or components which they recover should all other forms of identification have been removed. Always apply the warning stickers provided with the kit to deter thieves.

Ground anchors, wheel clamps and security posts

Pros: *An excellent form of security which will deter all but the most determined of thieves.*

Cons: *Awkward to install and can be expensive.*

● Whilst the motorcycle is at home, it is a good idea to attach it securely to the floor or a solid wall, even if it is kept in a securely locked garage. Various types of ground anchors, security posts and wheel clamps are available for this purpose **(see illustration 11)**. These security devices are either bolted to a solid concrete or brick structure or can be cemented into the ground.



Permanent ground anchors provide an excellent level of security when the bike is at home

Security at home

A high percentage of motorcycle thefts are from the owner's home. Here are some things to consider whenever your motorcycle is at home:

✔ Where possible, always keep the motorcycle in a securely locked garage. Never rely solely on the standard lock on the garage door, these are usual hopelessly inadequate. Fit an additional locking mechanism to the door and consider having the garage alarmed. A security light, activated by a movement sensor, is also a good investment.

✔ Always secure the motorcycle to the ground or a wall, even if it is inside a securely locked garage.

✔ Do not regularly leave the motorcycle outside your home, try to keep it out of sight wherever possible. If a garage is not available, fit a motorcycle cover over the bike to disguise its true identity.

✔ It is not uncommon for thieves to follow a motorcyclist home to find out where the bike is kept. They will then return at a later date. Be aware of this whenever you are returning home on your motorcycle. If you suspect you are being followed, do not return home, instead ride to a garage or shop and stop as a precaution.

✔ When selling a motorcycle, do not provide your home address or the location where the bike is normally kept. Arrange to meet the buyer at a location away from your home. Thieves have been known to pose as potential buyers to find out where motorcycles are kept and then return later to steal them.

Security away from the home

As well as fitting security equipment to your motorcycle here are a few general rules to follow whenever you park your motorcycle.

✔ Park in a busy, public place.

✔ Use car parks which incorporate security features, such as CCTV.

✔ At night, park in a well-lit area, preferably directly underneath a street light.

✔ Engage the steering lock.

✔ Secure the motorcycle to a solid, immovable object such as a post or railings with an additional lock. If this is not possible, secure the bike to a friend's motorcycle. Some public parking places provide security loops for motorcycles.

✔ Never leave your helmet or luggage attached to the motorcycle. Take them with you at all times.

Lubricants and fluids

A wide range of lubricants, fluids and cleaning agents is available for motor-cycles. This is a guide as to what is available, its applications and properties.

Four-stroke engine oil

- Engine oil is without doubt the most important component of any four-stroke engine. Modern motorcycle engines place a lot of demands on their oil and choosing the right type is essential. Using an unsuitable oil will lead to an increased rate of engine wear and could result in serious engine damage. Before purchasing oil, always check the recommended oil specification given by the manufacturer. The manufacturer will state a recommended 'type or classification' and also a specific 'viscosity' range for engine oil.
- The oil 'type or classification' is identified by its API (American Petroleum Institute) rating. The API rating will be in the form of two letters, e.g. SG. The S identifies the oil as being suitable for use in a petrol (gasoline) engine (S stands for spark ignition) and the second letter, ranging from A to J, identifies the oil's performance rating. The later this letter, the higher the specification of the oil; for example API SG oil exceeds the requirements of API SF oil. **Note:** *On some oils there may also be a second rating consisting of another two letters, the first letter being C, e.g. API SF/CD. This rating indicates the oil is also suitable for use in a diesel engines (the C stands for compression ignition) and is thus of no relevance for motorcycle use.*
- The 'viscosity' of the oil is identified by its SAE (Society of Automotive Engineers) rating. All modern engines require multigrade oils and the SAE rating will consist of two numbers, the first followed by a W, e.g. 10W/40. The first number indicates the viscosity rating of the oil at low temperatures (W stands for winter – tested at –20°C) and the second number represents the viscosity of the oil at high temperatures (tested at 100°C). The lower the number, the thinner the oil. For example an oil with an SAE 10W/40 rating will give better cold starting and running than an SAE 15W/40 oil.
- As well as ensuring the 'type' and 'viscosity' of the oil match the recommendations, another consideration to make when buying engine oil is whether to purchase a standard mineral-based oil, a semi-synthetic oil (also known as a synthetic blend or synthetic-based oil) or a fully-synthetic oil. Although all oils will have a similar rating and viscosity, their cost will vary considerably; mineral-based oils are the cheapest, the fully-synthetic oils the most expensive with the semi-synthetic oils falling somewhere in-between. This decision is very much up to the owner, but it should be noted that modern synthetic oils have far better lubricating and cleaning qualities than traditional mineral-based oils and tend to retain these properties for far longer. Bearing in mind the operating conditions inside a modern, high-revving motorcycle engine it is highly recommended that a fully synthetic oil is used. The extra expense at each service could save you money in the long term by preventing premature engine wear.
- As a final note always ensure that the oil is specifically designed for use in motorcycle engines. Engine oils designed primarily for use in car engines sometimes contain additives or friction modifiers which could cause clutch slip on a motorcycle fitted with a wet-clutch.

Two-stroke engine oil

- Modern two-stroke engines, with their high power outputs, place high demands on their oil. If engine seizure is to be avoided it is essential that a high-quality oil is used. Two-stroke oils differ hugely from four-stroke oils. The oil lubricates only the crankshaft and piston(s) (the transmission has its own lubricating oil) and is used on a total-loss basis where it is burnt completely during the combustion process.
- The Japanese have recently introduced a classification system for two-stroke oils, the JASO rating. This rating is in the form of two letters, either FA, FB or FC – FA is the lowest classification and FC the highest. Ensure the oil being used meets or exceeds the recommended rating specified by the manufacturer.
- As well as ensuring the oil rating matches the recommendation, another consideration to make when buying engine oil is whether to purchase a standard mineral-based oil, a semi-synthetic oil (also known as a synthetic blend or synthetic-based oil) or a fully-synthetic oil. The cost of each type of oil varies considerably; mineral-based oils are the cheapest, the fully-synthetic oils the most expensive with the semi-synthetic oils falling somewhere in-between. This decision is very much up to the owner, but it should be noted that modern synthetic oils have far better lubricating properties and burn cleaner than traditional mineral-based oils. It is therefore recommended that a fully synthetic oil is used. The extra expense could save you money in the long term by preventing premature engine wear, engine performance will be improved, carbon deposits and exhaust smoke will be reduced.





● Always ensure that the oil is specifically designed for use in an injector system. Many high quality two-stroke oils are designed for competition use and need to be pre-mixed with fuel. These oils are of a much higher viscosity and are not designed to flow through the injector pumps used on road-going two-stroke motorcycles.

Transmission (gear) oil



● On a two-stroke engine, the transmission and clutch are lubricated by their own separate oil bath which must be changed in accordance with the Maintenance Schedule.

● Although the engine and transmission units of most four-strokes use a common lubrication supply, there are some exceptions where the engine and gearbox have separate oil reservoirs and a dry clutch is used.

● Motorcycle manufacturers will either recommend a monograde transmission oil or a four-stroke multigrade engine oil to lubricate the transmission.

● Transmission oils, or gear oils as they are often called, are designed specifically for use in transmission systems. The viscosity of these oils is represented by an SAE number, but the scale of measurement applied is different to that used to grade engine oils. As a rough guide a SAE90 gear oil will be of the same viscosity as an SAE50 engine oil.

Shaft drive oil

● On models equipped with shaft final drive, the shaft drive gears are will have their own oil supply. The manufacturer will state a recommended 'type or classification' and also a specific 'viscosity' range in the same manner as for four-stroke engine oil.

● Gear oil classification is given by the number which follows the API GL (GL standing for gear lubricant) rating, the higher the number, the higher the specification of the oil, e.g. API GL5 oil is a higher specification than API GL4 oil. Ensure the oil meets or exceeds the classification specified and is of the correct viscosity. The viscosity of gear oils is also represented by an SAE number but the scale of measurement used is different to that used to grade engine oils. As a rough guide an SAE90 gear oil will be of the same viscosity as an SAE50 engine oil.

● If the use of an EP (Extreme Pressure) gear oil is specified, ensure the oil purchased is suitable.

Fork oil and suspension fluid



● Conventional telescopic front forks are hydraulic and require fork oil to work. To ensure the forks function correctly, the fork oil must be changed in accordance with the Maintenance Schedule.

● Fork oil is available in a variety of viscosities, identified by their SAE rating; fork oil ratings vary from light (SAE 5) to heavy (SAE 30). When purchasing fork oil, ensure the viscosity rating matches that specified by the manufacturer.

● Some lubricant manufacturers also produce a range of high-quality suspension fluids which are very similar to fork oil but are designed mainly for competition use. These fluids may have a different viscosity rating system which is not to be confused with the SAE rating of normal fork oil. Refer to the manufacturer's instructions if in any doubt.

Brake and clutch fluid



● All disc brake systems and some clutch systems are hydraulically operated. To ensure correct operation, the hydraulic fluid must be changed in accordance with the Maintenance Schedule.

● Brake and clutch fluid is classified by its DOT rating with most motorcycle manufacturers specifying DOT 3 or 4 fluid. Both fluid types are glycol-based and can be mixed together without adverse effect; DOT 4 fluid exceeds the requirements of DOT 3 fluid. Although it is safe to use DOT 4 fluid in a system designed for use with DOT 3 fluid, never use DOT 3 fluid in a system which specifies the use of DOT 4 as this will adversely affect the system's performance. The type required for the system will be marked on the fluid reservoir cap.

● Some manufacturers also produce a DOT 5 hydraulic fluid. DOT 5 hydraulic fluid is silicone-based and is not compatible with the glycol-based DOT 3 and 4 fluids. Never mix DOT 5 fluid with DOT 3 or 4 fluid as this will seriously affect the performance of the hydraulic system.


Coolant/antifreeze



● When purchasing coolant/antifreeze, always ensure it is suitable for use in an aluminium engine and contains corrosion inhibitors to prevent possible blockages of the internal coolant passages of the system. As a general rule, most coolants are designed to be used neat and should not be diluted whereas antifreeze can be mixed with distilled water to provide a coolant solution of the required strength. Refer to the manufacturer's instructions on the bottle.

● Ensure the coolant is changed in accordance with the Maintenance Schedule.

Chain lube

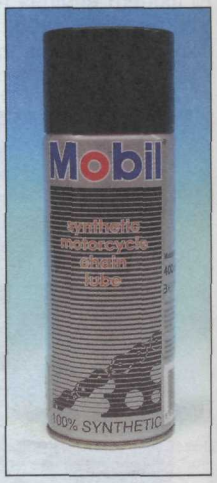

● Chain lube is an aerosol-type spray lubricant specifically designed for use on motorcycle final drive chains. Chain lube has two functions, to minimise friction between the final drive chain and sprockets and to prevent corrosion of the chain. Regular use of a good-quality chain lube will extend the life of the drive chain and sprockets and thus maximise the power being transmitted from the transmission to the rear wheel.

● When using chain lube, always allow some time for the solvents in the lube to evaporate before riding the motorcycle. This will minimise the amount of lube which will

'fling' off from the chain when the motorcycle is used. If the motorcycle is equipped with an 'O-ring' chain, ensure the chain lube is labelled as being suitable for use on 'O-ring' chains.

Degreasers and solvents



- There are many different types of solvents and degreasers available to remove the grime and grease which accumulate around the motorcycle during normal use. Degreasers and solvents are usually available as an aerosol-type spray or as a liquid which you apply with a brush. Always closely follow the manufacturer's instructions and wear eye protection during use. Be aware that many solvents are flammable and may give off noxious fumes; take adequate precautions when using them (*see Safety First!*).
- For general cleaning, use one of the many solvents or degreasers available from most motorcycle accessory shops. These solvents are usually applied then left for a certain time before being washed off with water.

Brake cleaner is a solvent specifically designed to remove all traces of oil, grease and dust from braking system components. Brake cleaner is designed to evaporate quickly and leaves behind no residue.

Carburettor cleaner is an aerosol-type solvent specifically designed to clear carburettor blockages and break down the hard deposits and gum often found inside carburettors during overhaul.

Contact cleaner is an aerosol-type solvent designed for cleaning electrical components. The cleaner will remove all traces of oil and dirt from components such as switch contacts or fouled spark plugs and then dry, leaving behind no residue.

Gasket remover is an aerosol-type solvent designed for removing stubborn gaskets from engine components during overhaul. Gasket remover will minimise the amount of scraping required to remove the gasket and therefore reduce the risk of damage to the mating surface.

Spray lubricants



- Aerosol-based spray lubricants are widely available and are excellent for lubricating lever pivots and exposed cables and switches. Try to use a lubricant which is of the dry-film type as the fluid evaporates, leaving behind a dry-film of lubricant. Lubricants which leave behind an oily residue will attract dust and dirt which will increase the rate of wear of the cable/lever.
- Most lubricants also act as a moisture dispersant and a penetrating fluid. This means they can also be used to 'dry out' electrical components such as wiring connectors or switches as well as helping to free seized fasteners.

Greases



- Grease is used to lubricate many of the pivot-points. A good-quality multi-purpose grease is suitable for most applications but some manufacturers will specify the use of specialist greases for use on components such as swingarm and suspension linkage bushes. These specialist greases can be purchased from most motorcycle (or car) accessory shops; commonly specified types include molybdenum disulphide grease, lithium-based grease, graphite-based grease, silicone-based grease and high-temperature copper-based grease.

Gasket sealing compounds

- Gasket sealing compounds can be used in conjunction with gaskets, to improve their sealing capabilities, or on their own to seal metal-to-metal joints. Depending on their type, sealing compounds either set hard or stay relatively soft and pliable.



- When purchasing a gasket sealing compound, ensure that it is designed specifically for use on an internal combustion engine. General multi-purpose sealants available from DIY stores may appear visibly similar but they are not designed to withstand the extreme heat or contact with fuel and oil encountered when used on an engine (*see 'Tools and Workshop Tips' for further information*).

Thread locking compound



- Thread locking compounds are used to secure certain threaded fasteners in position to prevent them from loosening due to vibration. Thread locking compounds can be purchased from most motorcycle (and car) accessory shops. Ensure the threads of the both components are completely clean and dry before sparingly applying the locking compound (*see 'Tools and Workshop Tips' for further information*).

Fuel additives

- Fuel additives which protect and clean the fuel system components are widely available. These additives are designed to remove all traces of deposits that build up on the carburettors/injectors and prevent wear, helping the fuel system to operate more efficiently. If a fuel additive is being used, check that it is suitable for use with your motorcycle, especially if your motorcycle is equipped with a catalytic converter.
- Octane boosters are also available. These additives are designed to improve the performance of highly-tuned engines being run on normal pump-fuel and are of no real use on standard motorcycles.

Conversion Factors

Length (distance)

Inches (in)	x 25.4	=	Millimetres (mm)	x 0.0394	=	Inches (in)
Feet (ft)	x 0.305	=	Metres (m)	x 3.281	=	Feet (ft)
Miles	x 1.609	=	Kilometres (km)	x 0.621	=	Miles

Volume (capacity)

Cubic inches (cu in; in^3)	x 16.387	=	Cubic centimetres (cc; cm^3)	x 0.061	=	Cubic inches (cu in; in^3)
Imperial pints (Imp pt)	x 0.568	=	Litres (l)	x 1.76	=	Imperial pints (Imp pt)
Imperial quarts (Imp qt)	x 1.137	=	Litres (l)	x 0.88	=	Imperial quarts (Imp qt)
Imperial quarts (Imp qt)	x 1.201	=	US quarts (US qt)	x 0.833	=	Imperial quarts (Imp qt)
US quarts (US qt)	x 0.946	=	Litres (l)	x 1.057	=	US quarts (US qt)
Imperial gallons (Imp gal)	x 4.546	=	Litres (l)	x 0.22	=	Imperial gallons (Imp gal)
Imperial gallons (Imp gal)	x 1.201	=	US gallons (US gal)	x 0.833	=	Imperial gallons (Imp gal)
US gallons (US gal)	x 3.785	=	Litres (l)	x 0.264	=	US gallons (US gal)

Mass (weight)

Ounces (oz)	x 28.35	=	Grams (g)	x 0.035	=	Ounces (oz)
Pounds (lb)	x 0.454	=	Kilograms (kg)	x 2.205	=	Pounds (lb)

Force

Ounces-force (ozf; oz)	x 0.278	=	Newtons (N)	x 3.6	=	Ounces-force (ozf; oz)
Pounds-force (lbf; lb)	x 4.448	=	Newtons (N)	x 0.225	=	Pounds-force (lbf; lb)
Newtons (N)	x 0.1	=	Kilograms-force (kgf; kg)	x 9.81	=	Newtons (N)

Pressure

Pounds-force per square inch (psi; lbf/in^2; lb/in^2)	x 0.070	=	Kilograms-force per square centimetre (kgf/cm^2; kg/cm^2)	x 14.223	=	Pounds-force per square inch (psi; lbf/in^2; lb/in^2)
Pounds-force per square inch (psi; lbf/in^2; lb/in^2)	x 0.068	=	Atmospheres (atm)	x 14.696	=	Pounds-force per square inch (psi; lbf/in^2; lb/in^2)
Pounds-force per square inch (psi; lbf/in^2; lb/in^2)	x 0.069	=	Bars	x 14.5	=	Pounds-force per square inch (psi; lbf/in^2; lb/in^2)
Pounds-force per square inch (psi; lbf/in^2; lb/in^2)	x 6.895	=	Kilopascals (kPa)	x 0.145	=	Pounds-force per square inch (psi; lbf/in^2; lb/in^2)
Kilopascals (kPa)	x 0.01	=	Kilograms-force per square centimetre (kgf/cm^2; kg/cm^2)	x 98.1	=	Kilopascals (kPa)
Millibar (mbar)	x 100	=	Pascals (Pa)	x 0.01	=	Millibar (mbar)
Millibar (mbar)	x 0.0145	=	Pounds-force per square inch (psi; lbf/in^2; lb/in^2)	x 68.947	=	Millibar (mbar)
Millibar (mbar)	x 0.75	=	Millimetres of mercury (mmHg)	x 1.333	=	Millibar (mbar)
Millibar (mbar)	x 0.401	=	Inches of water (inH_2O)	x 2.491	=	Millibar (mbar)
Millimetres of mercury (mmHg)	x 0.535	=	Inches of water (inH_2O)	x 1.868	=	Millimetres of mercury (mmHg)
Inches of water (inH_2O)	x 0.036	=	Pounds-force per square inch (psi; lbf/in^2; lb/in^2)	x 27.68	=	Inches of water (inH_2O)

Torque (moment of force)

Pounds-force inches (lbf in; lb in)	x 1.152	=	Kilograms-force centimetre (kgf cm; kg cm)	x 0.868	=	Pounds-force inches (lbf in; lb in)
Pounds-force inches (lbf in; lb in)	x 0.113	=	Newton metres (Nm)	x 8.85	=	Pounds-force inches (lbf in; lb in)
Pounds-force inches (lbf in; lb in)	x 0.083	=	Pounds-force feet (lbf ft; lb ft)	x 12	=	Pounds-force inches (lbf in; lb in)
Pounds-force feet (lbf ft; lb ft)	x 0.138	=	Kilograms-force metres (kgf m; kg m)	x 7.233	=	Pounds-force feet (lbf ft; lb ft)
Pounds-force feet (lbf ft; lb ft)	x 1.356	=	Newton metres (Nm)	x 0.738	=	Pounds-force feet (lbf ft; lb ft)
Newton metres (Nm)	x 0.102	=	Kilograms-force metres (kgf m; kg m)	x 9.804	=	Newton metres (Nm)

Power

Horsepower (hp)	x 745.7	=	Watts (W)	x 0.0013	=	Horsepower (hp)

Velocity (speed)

Miles per hour (miles/hr; mph)	x 1.609	=	Kilometres per hour (km/hr; kph)	x 0.621	=	Miles per hour (miles/hr; mph)

Fuel consumption*

Miles per gallon (mpg)	x 0.354	=	Kilometres per litre (km/l)	x 2.825	=	Miles per gallon (mpg)

Temperature

Degrees Fahrenheit = (°C x 1.8) + 32 Degrees Celsius (Degrees Centigrade; °C) = (°F - 32) x 0.56

** It is common practice to convert from miles per gallon (mpg) to litres/100 kilometres (l/100km), where mpg x l/100 km = 282*

About the MOT Test

In the UK, all vehicles more than three years old are subject to an annual test to ensure that they meet minimum safety requirements. A current test certificate must be issued before a machine can be used on public roads, and is required before a road fund licence can be issued. Riding without a current test certificate will also invalidate your insurance.

For most owners, the MOT test is an annual cause for anxiety, and this is largely due to owners not being sure what needs to be checked prior to submitting the motorcycle for testing. The simple answer is that a fully roadworthy motorcycle will have no difficulty in passing the test.

This is a guide to getting your motorcycle through the MOT test. Obviously it will not be possible to examine the motorcycle to the same standard as the professional MOT tester, particularly in view of the equipment required for some of the checks. However, working through the following procedures will enable you to identify any problem areas before submitting the motorcycle for the test.

It has only been possible to summarise the test requirements here, based on the regulations in force at the time of printing. Test standards are becoming increasingly stringent, although there are some exemptions for older vehicles. More information about the MOT test can be obtained from the TSO publications, *How Safe is your Motorcycle* and *The MOT Inspection Manual for Motorcycle Testing*.

Many of the checks require that one of the wheels is raised off the ground. If the motorcycle doesn't have a centre stand, note that an auxiliary stand will be required. Additionally, the help of an assistant may prove useful.

Certain exceptions apply to machines under 50 cc, machines without a lighting system, and Classic bikes - if in doubt about any of the requirements listed below seek confirmation from an MOT tester prior to submitting the motorcycle for the test.

Check that the frame number is clearly visible.

HAYNES HINT ***If a component is in borderline condition, the tester has discretion in deciding whether to pass or fail it. If the motorcycle presented is clean and evidently well cared for, the tester may be more inclined to pass a borderline component than if the motorcycle is scruffy and apparently neglected.***

Electrical System

Lights, turn signals, horn and reflector

✔ With the ignition on, check the operation of the following electrical components. **Note:** *The electrical components on certain small-capacity machines are powered by the generator, requiring that the engine is run for this check.*

a) *Headlight and tail light. Check that both illuminate in the low and high beam switch positions.*
b) *Position lights. Check that the front position (or sidelight) and tail light illuminate in this switch position.*
c) *Turn signals. Check that all flash at the correct rate, and that the warning light(s) function correctly. Check that the turn signal switch works correctly.*
d) *Hazard warning system (where fitted). Check that all four turn signals flash in this switch position.*
e) *Brake stop light. Check that the light comes on when the front and rear brakes are independently applied. Models first used on or after 1st April 1986 must have a brake light switch on each brake.*
f) *Horn. Check that the sound is continuous and of reasonable volume.*


✔ Check that there is a red reflector on the rear of the machine, either mounted separately or as part of the tail light lens.

✔ Check the condition of the headlight, tail light and turn signal lenses.


Headlight beam height

✔ The MOT tester will perform a headlight beam height check using specialised beam setting equipment **(see illustration 1)**. This equipment will not be available to the home mechanic, but if you suspect that the headlight is incorrectly set or may have been maladjusted in the past, you can perform a rough test as follows.

✔ Position the bike in a straight line facing a brick wall. The bike must be off its stand, upright and with a rider seated. Measure the height from the ground to the centre of the headlight and mark a horizontal line on the wall at this height. Position the motorcycle 3.8 metres from the wall and draw a vertical line up the wall central to the centreline of the motorcycle. Switch to dipped beam and check that the beam pattern falls slightly lower than the horizontal line and to the left of the vertical line **(see illustration 2)**.

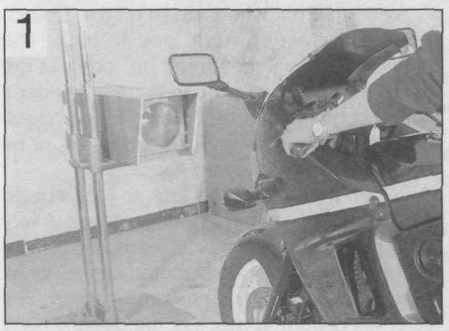

Headlight beam height checking equipment

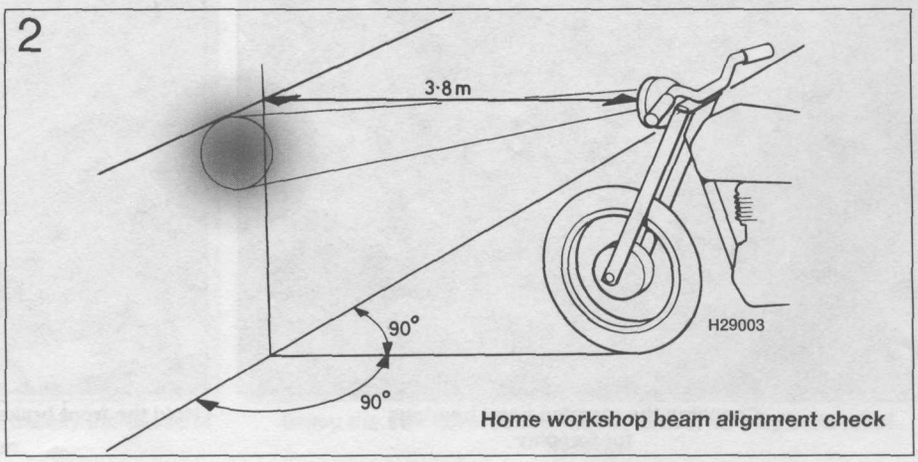

Home workshop beam alignment check

Exhaust System and Final Drive

Exhaust

✔ Check that the exhaust mountings are secure and that the system does not foul any of the rear suspension components.

✔ Start the motorcycle. When the revs are increased, check that the exhaust is neither holed nor leaking from any of its joints. On a linked system, check that the collector box is not leaking due to corrosion.

✔ Note that the exhaust decibel level ("loudness" of the exhaust) is assessed at the discretion of the tester. If the motorcycle was first used on or after 1st January 1985 the silencer must carry the BSAU 193 stamp, or a marking relating to its make and model, or be of OE (original equipment) manufacture. If the silencer is marked NOT FOR ROAD USE, RACING USE ONLY or similar, it will fail the MOT.

Final drive

✔ On chain or belt drive machines, check that the chain/belt is in good condition and does not have excessive slack. Also check that the sprocket is securely mounted on the rear wheel hub. Check that the chain/belt guard is in place.

✔ On shaft drive bikes, check for oil leaking from the drive unit and fouling the rear tyre.

Steering and Suspension

Steering

✔ With the front wheel raised off the ground, rotate the steering from lock to lock. The handlebar or switches must not contact the fuel tank or be close enough to trap the rider's hand. Problems can be caused by damaged lock stops on the lower yoke and frame, or by the fitting of non-standard handlebars.

✔ When performing the lock to lock check, also ensure that the steering moves freely without drag or notchiness. Steering movement can be impaired by poorly routed cables, or by overtight head bearings or worn bearings. The tester will perform a check of the steering head bearing lower race by mounting the front wheel on a surface plate, then performing a lock to lock check with the weight of the machine on the lower bearing **(see illustration 3)**.

✔ Grasp the fork sliders (lower legs) and attempt to push and pull on the forks **(see illustration 4)**. Any play in the steering head bearings will be felt. Note that in extreme cases, wear of the front fork bushes can be misinterpreted for head bearing play.



Front wheel mounted on a surface plate for steering head bearing lower race check

✔ Check that the handlebars are securely mounted.


✔ Check that the handlebar grip rubbers are secure. They should by bonded to the bar left end and to the throttle cable pulley on the right end.

Front suspension


✔ With the motorcycle off the stand, hold the front brake on and pump the front forks up and down **(see illustration 5)**. Check that they are adequately damped.




Checking the steering head bearings for freeplay

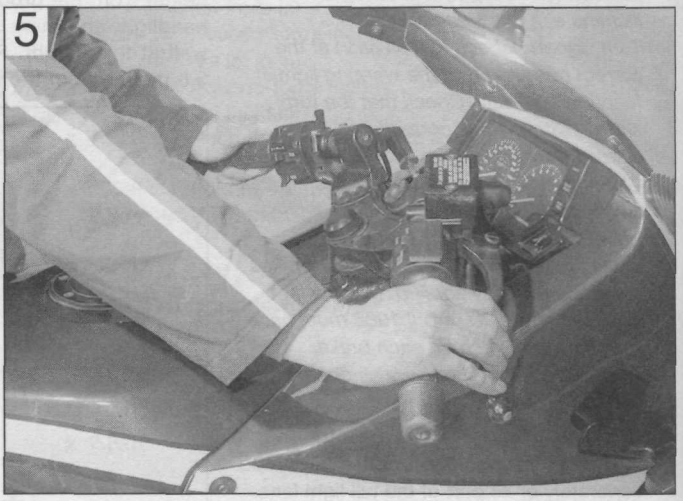


Hold the front brake on and pump the front forks up and down to check operation

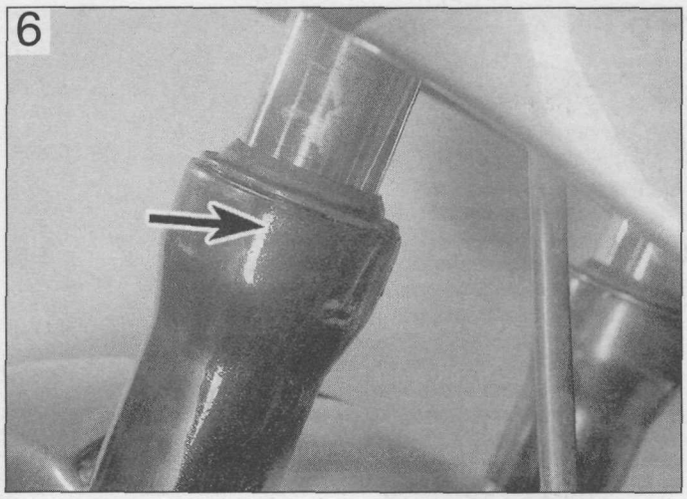

Inspect the area around the fork dust seal for oil leakage (arrow)

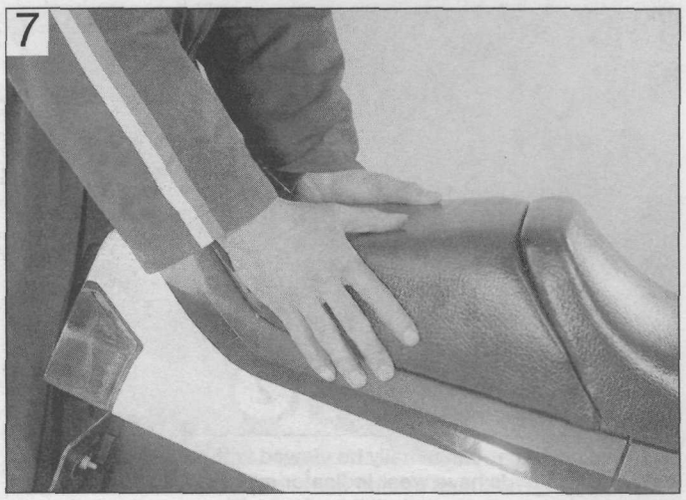

Bounce the rear of the motorcycle to check rear suspension operation

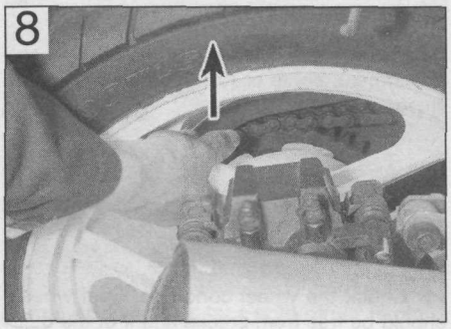

Checking for rear suspension linkage play

✔ Inspect the area above and around the front fork oil seals **(see illustration 6)**. There should be no sign of oil on the fork tube (stanchion) nor leaking down the slider (lower leg). On models so equipped, check that there is no oil leaking from the anti-dive units.

✔ On models with swingarm front suspension, check that there is no freeplay in the linkage when moved from side to side.


Rear suspension

✔ With the motorcycle off the stand and an assistant supporting the motorcycle by its handlebars, bounce the rear suspension **(see illustration 7)**. Check that the suspension components do not foul on any of the cycle parts and check that the shock absorber(s) provide adequate damping.


✔ Visually inspect the shock absorber(s) and check that there is no sign of oil leakage from its damper. This is somewhat restricted on certain single shock models due to the location of the shock absorber.

✔ With the rear wheel raised off the ground, grasp the wheel at the highest point and attempt to pull it up **(see illustration 8)**. Any play in the swingarm pivot or suspension linkage bearings will be felt as movement. **Note:** *Do not confuse play with actual suspension movement.* Failure to lubricate suspension linkage bearings can lead to bearing failure **(see illustration 9)**.


✔ With the rear wheel raised off the ground, grasp the swingarm ends and attempt to move the swingarm from side to side and forwards and backwards - any play indicates wear of the swingarm pivot bearings **(see illustration 10)**.

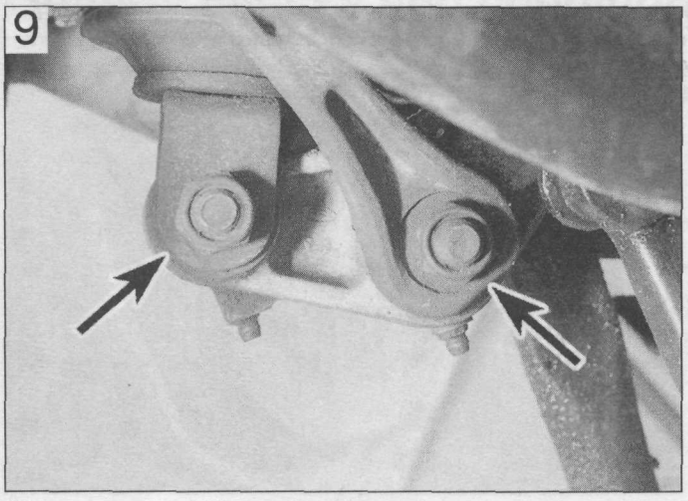


Worn suspension linkage pivots (arrows) are usually the cause of play in the rear suspension

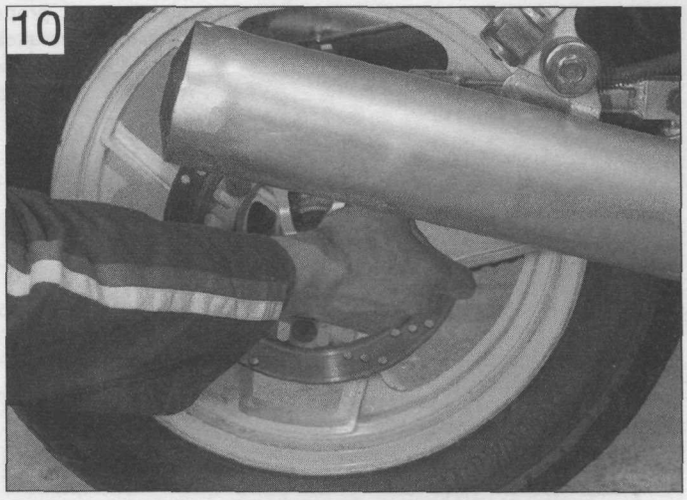

Grasp the swingarm at the ends to check for play in its pivot bearings

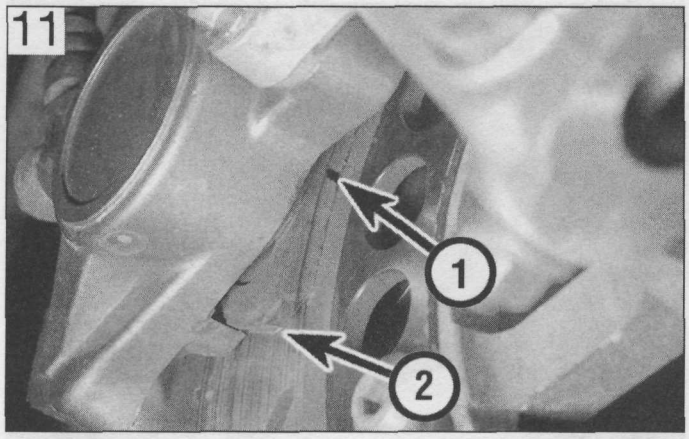

Brake pad wear can usually be viewed without removing the caliper. Most pads have wear indicator grooves (1) and some also have indicator tangs (2)

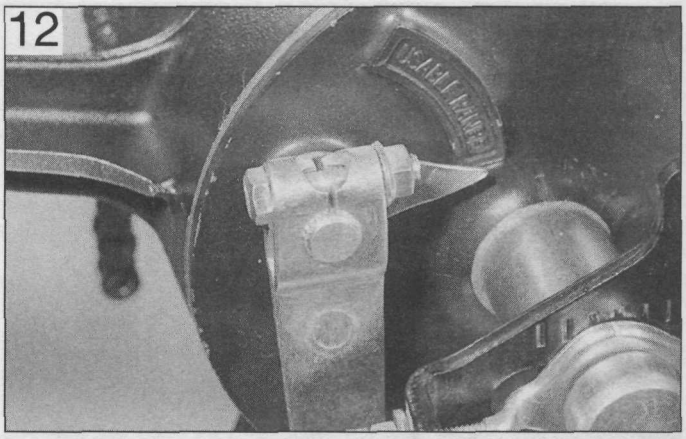

On drum brakes, check the angle of the operating lever with the brake fully applied. Most drum brakes have a wear indicator pointer and scale.

Brakes, Wheels and Tyres

Brakes

✔ With the wheel raised off the ground, apply the brake then free it off, and check that the wheel is about to revolve freely without brake drag.

✔ On disc brakes, examine the disc itself. Check that it is securely mounted and not cracked.

✔ On disc brakes, view the pad material through the caliper mouth and check that the pads are not worn down beyond the limit **(see illustration 11)**.

✔ On drum brakes, check that when the brake is applied the angle between the operating lever and cable or rod is not too great **(see illustration 12)**. Check also that the operating lever doesn't foul any other components.

✔ On disc brakes, examine the flexible hoses from top to bottom. Have an assistant hold the brake on so that the fluid in the hose is under pressure, and check that there is no sign of fluid leakage, bulges or cracking. If there are any metal brake pipes or unions, check that these are free from corrosion and damage. Where a brake-linked anti-dive system is fitted, check the hoses to the anti-dive in a similar manner.

✔ Check that the rear brake torque arm is secure and that its fasteners are secured by self-locking nuts or castellated nuts with split-pins or R-pins **(see illustration 13)**.

✔ On models with ABS, check that the self-check warning light in the instrument panel works.


✔ The MOT tester will perform a test of the motorcycle's braking efficiency based on a calculation of rider and motorcycle weight. Although this cannot be carried out at home, you can at least ensure that the braking systems are properly maintained. For hydraulic disc brakes, check the fluid level, lever/pedal feel (bleed of air if its spongy) and pad material. For drum brakes, check adjustment, cable or rod operation and shoe lining thickness.

Wheels and tyres


✔ Check the wheel condition. Cast wheels should be free from cracks and if of the built-up design, all fasteners should be secure. Spoked wheels should be checked for broken, corroded, loose or bent spokes.

✔ With the wheel raised off the ground, spin the wheel and visually check that the tyre and wheel run true. Check that the tyre does not foul the suspension or mudguards.


✔ With the wheel raised off the ground, grasp the wheel and attempt to move it about the axle (spindle) **(see illustration 14)**. Any play felt here indicates wheel bearing failure.

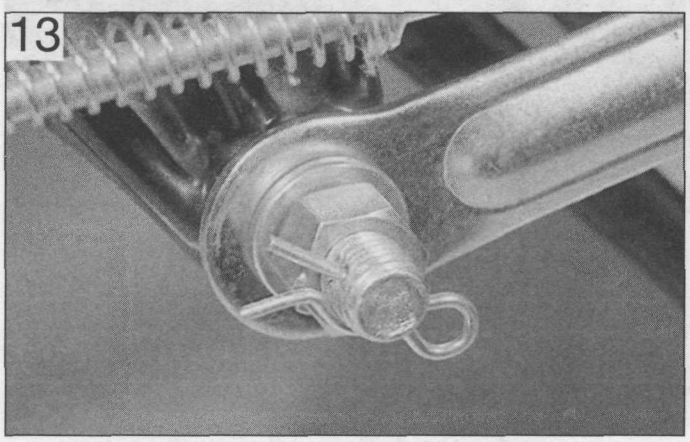


Brake torque arm must be properly secured at both ends

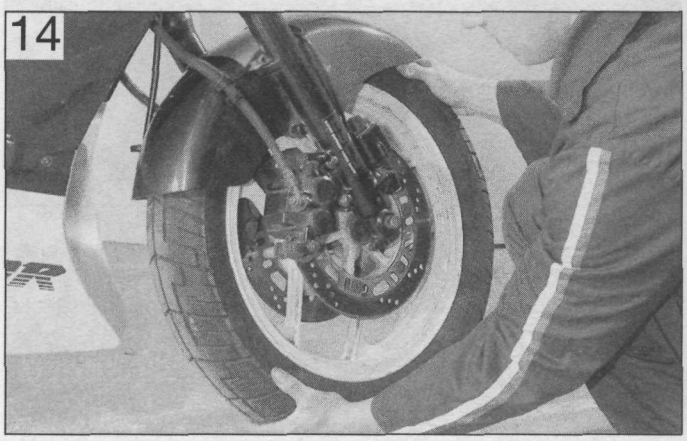


Check for wheel bearing play by trying to move the wheel about the axle (spindle)

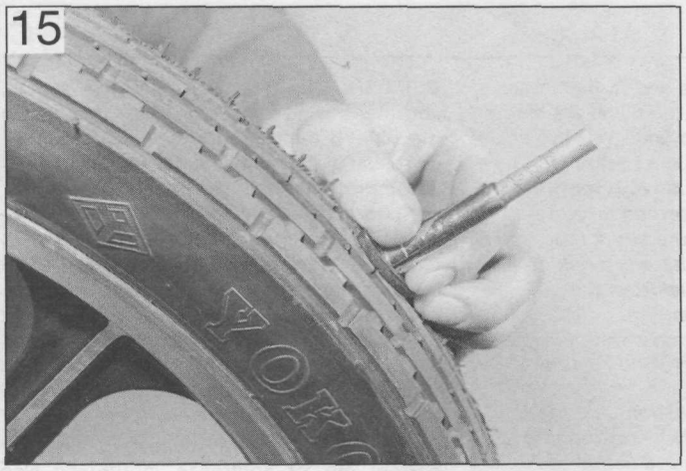

Checking the tyre tread depth

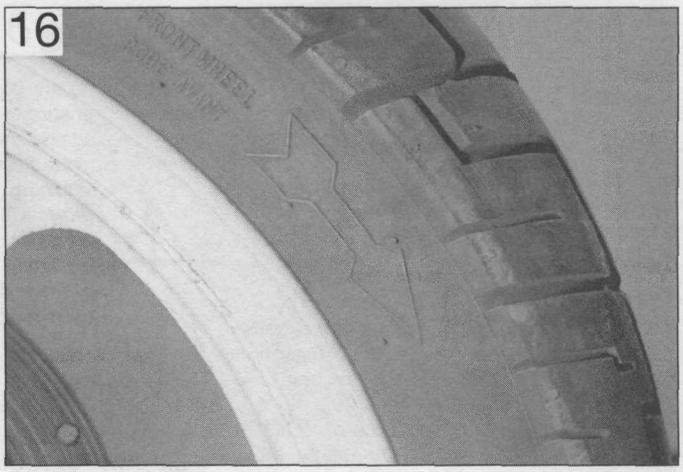

Tyre direction of rotation arrow can be found on tyre sidewall

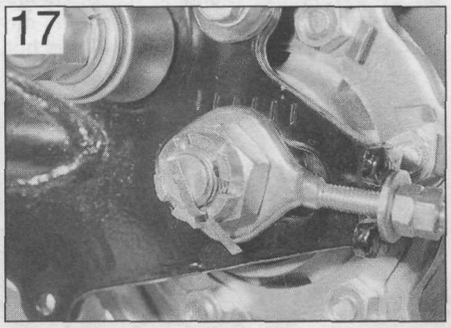

Castellated type wheel axle (spindle) nut *must be secured by a split pin or R-pin*



Two straightedges are used to check *wheel alignment*

✔ Check the tyre tread depth, tread condition and sidewall condition **(see illustration 15)**.

✔ Check the tyre type. Front and rear tyre types must be compatible and be suitable for road use. Tyres marked NOT FOR ROAD USE, COMPETITION USE ONLY or similar, will fail the MOT.

✔ If the tyre sidewall carries a direction of rotation arrow, this must be pointing in the direction of normal wheel rotation **(see illustration 16)**.

✔ Check that the wheel axle (spindle) nuts (where applicable) are properly secured. A self-locking nut or castellated nut with a split-pin or R-pin can be used **(see illustration 17)**.

✔ *Wheel alignment is checked with the* motorcycle off the stand and a rider seated. With the front wheel pointing straight ahead, two perfectly straight lengths of metal or wood and placed against the sidewalls of both tyres **(see illustration 18)**. The gap each side of the front tyre must be equidistant on both sides. Incorrect wheel alignment may be due to a cocked rear wheel (often as the result of poor chain adjustment) or in extreme cases, a bent frame.

General checks and condition

✔ Check the security of all major fasteners, bodypanels, seat, fairings (where fitted) and mudguards.

✔ Check that the rider and pillion footrests, handlebar levers and brake pedal are securely mounted.

✔ Check for corrosion on the frame or any load-bearing components. If severe, this may affect the structure, particularly under stress.

Sidecars

A motorcycle fitted with a sidecar requires additional checks relating to the stability of the machine and security of attachment and swivel joints, plus specific wheel alignment (toe-in) requirements. Additionally, tyre and lighting requirements differ from conventional motorcycle use. Owners are advised to check MOT test requirements with an official test centre.

Preparing for storage

Before you start

If repairs or an overhaul is needed, see that this is carried out now rather than left until you want to ride the bike again.

Give the bike a good wash and scrub all dirt from its underside. Make sure the bike dries completely before preparing for storage.

Engine

● Remove the spark plug(s) and lubricate the cylinder bores with approximately a teaspoon of motor oil using a spout-type oil can **(see illustration 1)**. Reinstall the spark plug(s). Crank the engine over a couple of times to coat the piston rings and bores with oil. If the bike has a kickstart, use this to turn the engine over. If not, flick the kill switch to the OFF position and crank the engine over on the starter **(see illustration 2)**. If the nature on the ignition system prevents the starter operating with the kill switch in the OFF position, remove the spark plugs and fit them back in their caps; ensure that the plugs are earthed (grounded) against the cylinder head when the starter is operated **(see illustration 3)**.

Warning: It is important that the plugs are earthed (grounded) away from the spark plug holes otherwise there is a risk of atomised fuel from the cylinders igniting.

HAYNES HiNT


On a single cylinder four-stroke engine, you can seal the combustion chamber completely by positioning the piston at TDC on the compression stroke.

● Drain the carburettor(s) otherwise there is a risk of jets becoming blocked by gum deposits from the fuel **(see illustration 4)**.


● If the bike is going into long-term storage, consider adding a fuel stabiliser to the fuel in the tank. If the tank is drained completely, corrosion of its internal surfaces may occur if left unprotected for a long period. The tank can be treated with a rust preventative especially for this purpose. Alternatively, remove the tank and pour half a litre of motor oil into it, install the filler cap and shake the tank to coat its internals with oil before draining off the excess. The same effect can also be achieved by spraying WD40 or a similar water-dispersant around the inside of the tank via its flexible nozzle.

● Make sure the cooling system contains the correct mix of antifreeze. Antifreeze also contains important corrosion inhibitors.


● The air intakes and exhaust can be sealed off by covering or plugging the openings. Ensure that you do not seal in any condensation; run the engine until it is hot,

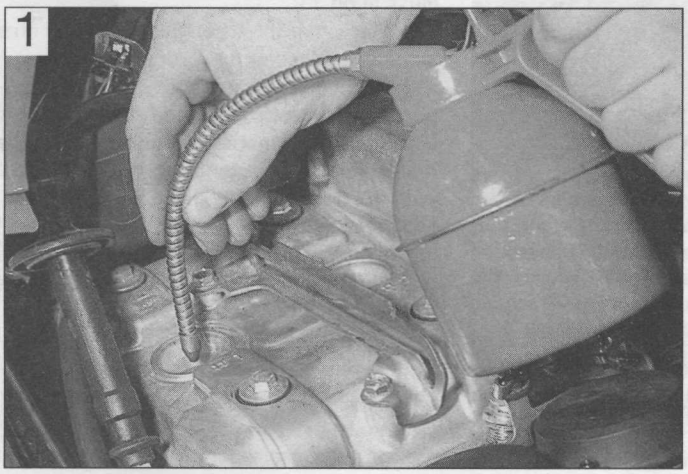


Squirt a drop of motor oil into each cylinder

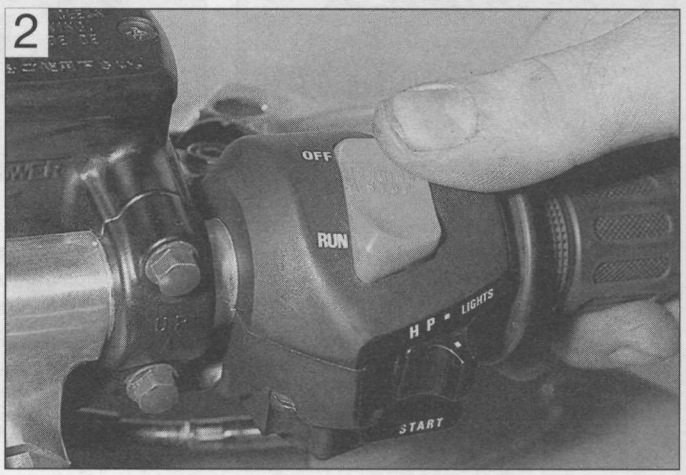


Flick the kill switch to OFF . . .

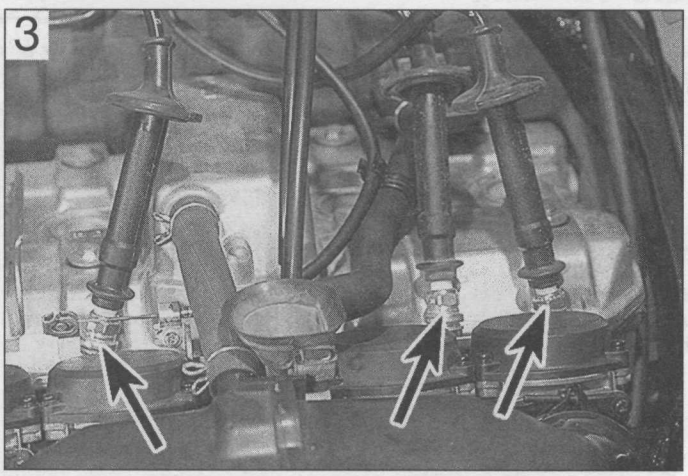


. . . and ensure that the metal bodies of the plugs (arrows) are earthed against the cylinder head

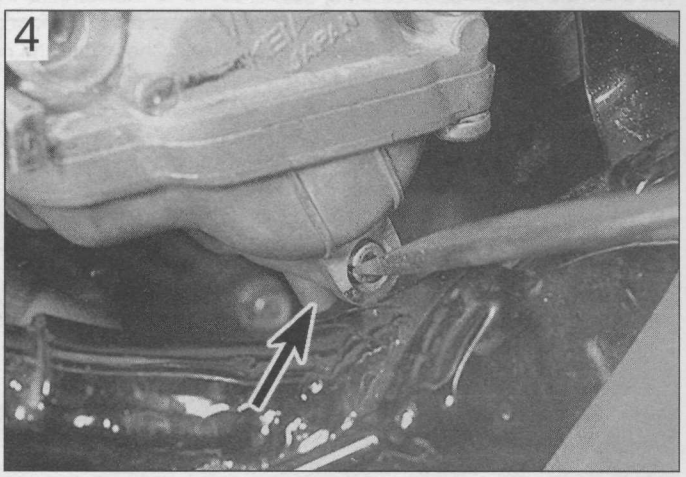


Connect a hose to the carburettor float chamber drain stub (arrow) and unscrew the drain screw

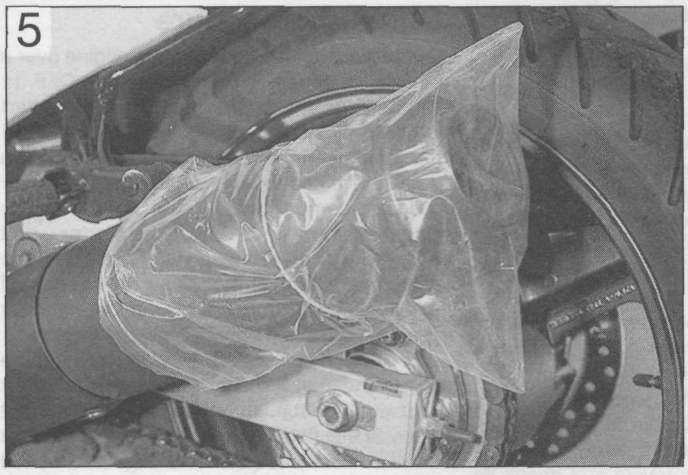

Exhausts can be sealed off with a plastic bag

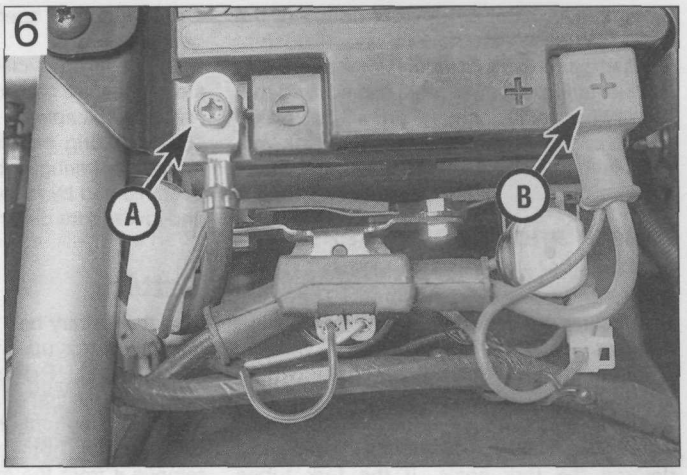

Disconnect the negative lead (A) first, followed by the positive lead (B)

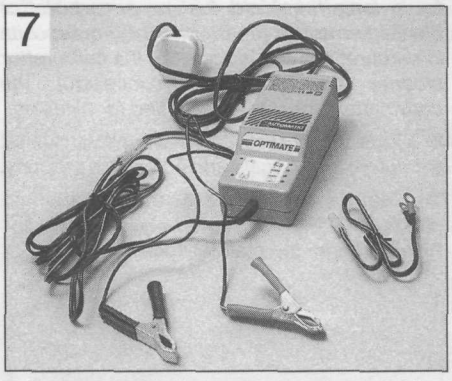

Use a suitable battery charger - this kit also assess battery condition

then switch off and allow to cool. Tape a piece of thick plastic over the silencer end(s) **(see illustration 5)**. Note that some advocate pouring a tablespoon of motor oil into the silencer(s) before sealing them off.

Battery

● Remove it from the bike - in extreme cases of cold the battery may freeze and crack its case **(see illustration 6)**.

● Check the electrolyte level and top up if necessary (conventional refillable batteries). Clean the terminals.

● Store the battery off the motorcycle and away from any sources of fire. Position a wooden block under the battery if it is to sit on the ground.

● Give the battery a trickle charge for a few hours every month **(see illustration 7)**.

Tyres

● Place the bike on its centrestand or an auxiliary stand which will support the motorcycle in an upright position. Position wood blocks under the tyres to keep them off the ground and to provide insulation from damp. If the bike is being put into long-term storage, ideally both tyres should be off the ground; not only will this protect the tyres, but will also ensure that no load is placed on the steering head or wheel bearings.

● Deflate each tyre by 5 to 10 psi, no more or the beads may unseat from the rim, making subsequent inflation difficult on tubeless tyres.

Pivots and controls

● Lubricate all lever, pedal, stand and footrest pivot points. If grease nipples are fitted to the rear suspension components, apply lubricant to the pivots.

● Lubricate all control cables.

Cycle components

● Apply a wax protectant to all painted and plastic components. Wipe off any excess, but don't polish to a shine. Where fitted, clean the screen with soap and water.

● Coat metal parts with Vaseline (petroleum jelly). When applying this to the fork tubes, do not compress the forks otherwise the seals will rot from contact with the Vaseline.

● Apply a vinyl cleaner to the seat.

Storage conditions

● Aim to store the bike in a shed or garage which does not leak and is free from damp.

● Drape an old blanket or bedspread over the bike to protect it from dust and direct contact with sunlight (which will fade paint). This also hides the bike from prying eyes. Beware of tight-fitting plastic covers which may allow condensation to form and settle on the bike.

Getting back on the road

Engine and transmission

● Change the oil and replace the oil filter. If this was done prior to storage, check that the oil hasn't emulsified - a thick whitish substance which occurs through condensation.

● Remove the spark plugs. Using a spout-type oil can, squirt a few drops of oil into the cylinder(s). This will provide initial lubrication as the piston rings and bores comes back into contact. Service the spark plugs, or fit new ones, and install them in the engine.

● Check that the clutch isn't stuck on. The plates can stick together if left standing for some time, preventing clutch operation. Engage a gear and try rocking the bike back and forth with the clutch lever held against the handlebar. If this doesn't work on cable-operated clutches, hold the clutch lever back against the handlebar with a strong elastic band or cable tie for a couple of hours **(see illustration 8)**.

● If the air intakes or silencer end(s) were blocked off, remove the bung or cover used.

● If the fuel tank was coated with a rust



Hold clutch lever back against the handlebar with elastic bands or a cable tie

preventative, oil or a stabiliser added to the fuel, drain and flush the tank and dispose of the fuel sensibly. If no action was taken with the fuel tank prior to storage, it is advised that the old fuel is disposed of since it will go off over a period of time. Refill the fuel tank with fresh fuel.

Frame and running gear

- *Oil all pivot points and cables.*
- Check the tyre pressures. They will definitely need inflating if pressures were reduced for storage.
- Lubricate the final drive chain (where applicable).
- Remove any protective coating applied to the fork tubes (stanchions) since this may well destroy the fork seals. If the fork tubes weren't protected and have picked up rust spots, remove them with very fine abrasive paper and refinish with metal polish.
- *Check that both brakes operate correctly.* Apply each brake hard and check that it's not possible to move the motorcycle forwards, then check that the brake frees off again once released. Brake caliper pistons can stick due to corrosion around the piston head, or on the sliding caliper types, due to corrosion of the slider pins. If the brake doesn't free after repeated operation, take the caliper off for examination. Similarly drum brakes can stick due to a seized operating cam, cable or rod linkage.
- If the motorcycle has been in long-term storage, renew the brake fluid and clutch fluid (where applicable).
- Depending on where the bike has been stored, the wiring, cables and hoses may have been nibbled by rodents. Make a visual check and investigate disturbed wiring loom tape.

Battery

- If the battery has been previously removal and given top up charges it can simply be reconnected. Remember to connect the positive cable first and the negative cable last.
- On conventional refillable batteries, if the battery has not received any attention, remove it from the motorcycle and check its electrolyte level. Top up if necessary then charge the battery. If the battery fails to hold a charge and a visual checks show heavy white *sulphation of the plates, the battery* is probably defective and must be renewed. This is particularly likely if the battery is old. Confirm battery condition with a specific gravity check.
- On sealed (MF) batteries, if the battery has not received any attention, remove it from the motorcycle and charge it according to the information on the battery case - if the battery fails to hold a charge it must be renewed.

Starting procedure

- If a kickstart is fitted, turn the engine over a couple of times with the ignition OFF to distribute oil around the engine. If no kickstart is fitted, flick the engine kill switch OFF and the ignition ON and crank the engine over a couple of times to work oil around the upper *cylinder components. If the nature of the* ignition system is such that the starter won't work with the kill switch OFF, remove the spark plugs, fit them back into their caps and earth (ground) their bodies on the cylinder *head. Reinstall the spark plugs afterwards.*
- Switch the kill switch to RUN, operate the choke and start the engine. If the engine won't start don't continue cranking the engine - not only will this flatten the battery, but the starter motor will overheat. Switch the ignition off and try again later. If the engine refuses to start, go through the fault finding procedures in this manual. **Note:** *If the bike has been in storage for a long time, old fuel or a carburettor blockage may be the problem. Gum deposits in carburettors can block jets - if a carburettor cleaner doesn't prove successful the carburettors must be dismantled for cleaning.*
- *Once the engine has started, check that* the lights, turn signals and horn work properly.
- Treat the bike gently for the first ride and check all fluid levels on completion. Settle the bike back into the maintenance schedule.

This Section provides an easy reference-guide to the more common faults that are likely to afflict your machine. Obviously, the opportunities are almost limitless for faults to occur as a result of obscure failures, and to try and cover all eventualities would require a book. Indeed, a number have been written on the subject.

Successful troubleshooting is not a mysterious 'black art' but the application of a bit of knowledge combined with a systematic and logical approach to the problem. Approach any troubleshooting by first accurately identifying the symptom and then checking through the list of possible causes, starting with the simplest or most obvious and progressing in stages to the most complex.

Take nothing for granted, but above all apply liberal quantities of common sense.

The main symptom of a fault is given in the text as a major heading below which are listed the various systems or areas which may contain the fault. Details of each possible cause for a fault and the remedial action to be taken are given, in brief, in the paragraphs below each heading. Further information should be sought in the relevant Chapter.

1 Engine doesn't start or is difficult to start

- ☐ Starter motor doesn't rotate
- ☐ Starter motor rotates but engine does not turn over
- ☐ Starter works but engine won't turn over (seized
- ☐ No fuel flow
- ☐ Engine flooded
- ☐ No spark or weak spark
- ☐ Compression low
- ☐ Stalls after starting
- ☐ Rough idle

2 Poor running at low speed

- ☐ Spark weak
- ☐ Fuel/air mixture incorrect
- ☐ Compression low
- ☐ Poor acceleration

3 Poor running or no power at high speed

- ☐ Firing incorrect
- ☐ Fuel/air mixture incorrect
- ☐ Compression low
- ☐ Knocking or pinking
- ☐ Miscellaneous causes

4 Overheating

- ☐ Engine overheats
- ☐ Firing incorrect
- ☐ Fuel/air mixture incorrect
- ☐ Compression too high
- ☐ Engine load excessive
- ☐ Lubrication inadequate
- ☐ Miscellaneous causes

5 Clutch problems

- ☐ Clutch slipping
- ☐ Clutch not disengaging completely

6 Gearchange problems

- ☐ Doesn't go into gear, or lever doesn't return
- ☐ Jumps out of gear
- ☐ Overselects

7 Abnormal engine noise

- ☐ Knocking or pinking
- ☐ Piston slap or rattling
- ☐ Valve noise
- ☐ Other noise

8 Abnormal driveline noise

- ☐ Clutch noise
- ☐ Transmission noise
- ☐ Final drive noise

9 Abnormal frame and suspension noise

- ☐ Front end noise
- ☐ Shock absorber noise
- ☐ Brake noise

10 Oil level indicator light comes on

- ☐ Engine lubrication system
- ☐ Electrical system

11 Excessive exhaust smoke

- ☐ White smoke
- ☐ Black smoke
- ☐ Brown smoke

12 Poor handling or stability

- ☐ Handlebar hard to turn
- ☐ Handlebar shakes or vibrates excessively
- ☐ Handlebar pulls to one side
- ☐ Poor shock absorbing qualities

13 Braking problems

- ☐ Brakes are spongy, don't hold
- ☐ Brake lever or pedal pulsates
- ☐ Brakes drag

14 Electrical problems

- ☐ Battery dead or weak
- ☐ Battery overcharged

1 Engine doesn't start or is difficult to start

Starter motor doesn't rotate

- ☐ Engine kill switch OFF.
- ☐ Fuse blown. Check main fuse and ignition circuit fuse (Chapter 9).
- ☐ Battery voltage low. Check and recharge battery (Chapter 9).
- ☐ Starter motor defective. Make sure the wiring to the starter is secure. Make sure the starter relay clicks when the start button is pushed. If the relay clicks, then the fault is in the wiring or motor.
- ☐ Starter relay faulty. Check it according to the procedure in Chapter 9.
- ☐ Starter switch not contacting. The contacts could be wet, corroded or dirty. Disassemble and clean the switch (Chapter 9).
- ☐ Wiring open or shorted. Check all wiring connections and harnesses to make sure that they are dry, tight and not corroded. Also check for broken or frayed wires that can cause a short to ground (earth) (see wiring diagram, Chapter 9).
- ☐ Ignition (main) switch defective. Check the switch according to the procedure in Chapter 9. Replace the switch with a new one if it is defective.
- ☐ Engine kill switch defective. Check for wet, dirty or corroded contacts. Clean or replace the switch as necessary (Chapter 9).
- ☐ Faulty neutral, sidestand (where fitted) or clutch switch. Check the wiring to each switch and the switch itself according to the procedures in Chapter 9.
- ☐ Faulty starter circuit cut-off relay or diode. Check according to the procedures in Chapter 9.

Starter motor rotates but engine does not turn over

- ☐ Starter clutch defective. Inspect and repair or replace (Chapter 2).
- ☐ Damaged reduction or idle or starter gears. Inspect and replace the damaged parts (Chapter 2).

Starter works but engine won't turn over (seized)

- ☐ Seized engine caused by one or more internally damaged components. Failure due to wear, abuse or lack of lubrication. Damage can include seized valves, followers, camshafts, pistons, crankshaft, connecting rod bearings, or transmission gears or bearings. Refer to Chapter 2 for engine disassembly.

No fuel flow

- ☐ No fuel in tank.
- ☐ Faulty fuel pump or relay. Check according to the procedure in Chapter 9.
- ☐ Fuel filter clogged. Remove the filter and replace it with a new one (Chapter 1).
- ☐ Fuel line clogged. Pull the fuel line loose, drain it and carefully blow through it.
- ☐ Float needle valve or valve seat strainer clogged. For all of the valves to be clogged, either a very bad batch of fuel with an unusual additive has been used, or some other foreign material has entered the tank. Many times after a machine has been stored for many months without running, the fuel turns to a varnish-like liquid and forms deposits on the inlet needle valves and jets. Remove and overhaul the carburettors if draining the float chambers doesn't solve the problem (Chapter 4).

Engine flooded

- ☐ Fuel level too high. Check and adjust as necessary (Chapter 4).
- ☐ Float needle valve worn or stuck open. A piece of dirt, rust or other debris can cause the valve to seat improperly, causing excess fuel to be admitted to the float chamber. In this case, the float chamber should be cleaned and the needle valve and seat inspected. If the needle and seat are worn, then the leaking will persist and the parts should be replaced with new ones (Chapter 4).
- ☐ Starting technique incorrect. Under normal circumstances (i.e., if all the carburettor functions are sound) the machine should start with little or no throttle. When the engine is cold, the choke should be operated and the engine started without opening the throttle. When the engine is at operating temperature, only a very slight amount of throttle should be necessary. If the engine is flooded hold the throttle fully open while cranking the engine. This will allow additional air to reach the cylinders.

No spark or weak spark

- ☐ Ignition (main) switch OFF.
- ☐ Engine kill switch turned to the OFF position.
- ☐ Battery voltage low. Check and recharge the battery as necessary (Chapter 9).
- ☐ Spark plugs dirty, defective or worn out. Locate reason for fouled plugs using spark plug condition chart at the end of this manual and follow the plug maintenance procedures (Chapter 1).
- ☐ Spark plug caps or HT leads faulty. Check condition. Replace either or both components if cracks or deterioration are evident (Chapter 5).
- ☐ Spark plug caps not making good contact. Make sure that the plug caps fit snugly over the plug ends.
- ☐ Ignition control unit defective. Check the unit, referring to Chapter 5 for details.
- ☐ Pick-up coil(s) defective. Check the coil(s), referring to Chapter 5 for details.
- ☐ Ignition HT coils defective. Check the coils, referring to Chapter 5.
- ☐ Ignition or kill switch shorted. This is usually caused by water, corrosion, damage or excessive wear. The switches can be disassembled and cleaned with electrical contact cleaner. If cleaning does not help, replace the switches (Chapter 9).
- ☐ Wiring shorted or broken between:
  - *a) Ignition (main) switch and engine kill switch (or blown fuse)*
  - *b) Ignition control unit and engine kill switch*
  - *c) Ignition control unit and ignition HT coils*
  - *d) Ignition HT coils and spark plugs*
  - *e) Ignition control unit and pick-up coil(s)*
- ☐ Make sure that all wiring connections are clean, dry and tight. Look for chafed and broken wires (Chapters 4 and 8).

1 Engine doesn't start or is difficult to start (continued)

Compression low

- ☐ Spark plugs loose. Remove the plugs and inspect their threads. Reinstall and tighten to the specified torque (Chapter 1).
- ☐ Cylinder head(s) not sufficiently tightened down. If either cylinder head is suspected of being loose, then there's a chance that the gasket or head is damaged if the problem has persisted for any length of time. The head nuts should be tightened to the proper torque in the correct sequence (Chapter 2).
- ☐ Improper valve clearance. This means that the valve is not closing completely and compression pressure is leaking past the valve. Check and adjust the valve clearances (Chapter 1).
- ☐ Cylinder and/or piston worn. Excessive wear will cause compression pressure to leak past the rings. This is usually accompanied by worn rings as well. A top-end overhaul is necessary (Chapter 2).
- ☐ Piston rings worn, weak, broken, or sticking. Broken or sticking piston rings usually indicate a lubrication or carburation problem that causes excess carbon deposits or seizures to form on the pistons and rings. Top-end overhaul is necessary (Chapter 2).
- ☐ Piston ring-to-groove clearance excessive. This is caused by excessive wear of the piston ring lands. Piston replacement is necessary (Chapter 2).
- ☐ Cylinder head gasket damaged. If the head is allowed to become loose, or if excessive carbon build-up on the piston crown and combustion chamber causes extremely high compression, the head gasket may leak. Retorquing the head is not always sufficient to restore the seal, so gasket replacement is necessary (Chapter 2).
- ☐ Cylinder head(s) warped. This is caused by overheating or improperly tightened head nuts. Machine shop resurfacing or head replacement is necessary (Chapter 2).
- ☐ Valve spring broken or weak. Caused by component failure or wear; the springs must be replaced (Chapter 2).
- ☐ Valve not seating properly. This is caused by a bent valve (from over-revving or improper valve adjustment), burned valve or seat (improper carburation) or an accumulation of carbon deposits on the seat (from carburation or lubrication problems). The valves must be cleaned and/or replaced and the seats serviced if possible (Chapter 2).

Stalls after starting

- ☐ Improper choke action. Make sure the choke linkage shaft is getting a full stroke and staying in the out position (Chapter 4).
- ☐ Ignition malfunction (Chapter 5).
- ☐ Carburettor malfunction (Chapter 4).
- ☐ Fuel contaminated. The fuel can be contaminated with either dirt or water, or can change chemically if the machine is allowed to sit for several months or more. Drain the tank and float chambers (Chapter 4).
- ☐ Intake air leak. Check for loose carburettor-to-intake manifold connections, loose or missing vacuum gauge adapter screws or hoses, or loose carburettor tops (Chapter 4).
- ☐ Engine idle speed incorrect. Turn idle adjusting screw until the engine idles at the specified rpm (Chapter 1).

Rough idle

- ☐ Ignition malfunction (Chapter 5).
- ☐ Idle speed incorrect (Chapter 1).
- ☐ Carburettors not synchronised. Adjust carburettors with vacuum gauge or manometer set (Chapter 1).
- ☐ Carburettor malfunction (Chapter 4).
- ☐ Fuel contaminated. The fuel can be contaminated with either dirt or water, or can change chemically if the machine is allowed to sit for several months or more. Drain the tank and float chambers (Chapter 4).
- ☐ Intake air leak. Check for loose carburettor-to-intake manifold connections, loose or missing vacuum gauge adapter screws or hoses, or loose carburettor tops (Chapter 4).
- ☐ Air filter clogged. Replace the air filter element (Chapter 1).

2 Poor running at low speeds

Spark weak

- ☐ Battery voltage low. Check and recharge battery (Chapter 9).
- ☐ Spark plugs fouled, defective or worn out (Chapter 1)
- ☐ Spark plug cap or HT wiring defective (Chapters 1 and 5).
- ☐ Spark plug caps not making contact. Make sure they are properly connected.
- ☐ Incorrect spark plugs. Wrong type, heat range or cap configuration. Check and install correct plugs (Chapter 1).
- ☐ Ignition control unit defective (Chapter 5).
- ☐ Pick-up coil(s) defective (Chapter 5).
- ☐ Ignition HT coil(s) defective (Chapter 5).

Fuel/air mixture incorrect

- ☐ Pilot screws out of adjustment (Chapter 4).
- ☐ Pilot jet or air passage clogged. Remove and overhaul the carburettors (Chapter 4).
- ☐ Air bleed holes clogged. Remove carburettor and blow out all passages (Chapter 4).
- ☐ Air filter clogged, poorly sealed or missing (Chapter 1).
- ☐ Air filter housing poorly sealed. Look for cracks, holes or loose clamps and replace or repair defective parts (Chapter 4).
- ☐ Fuel level too high or too low. Check the level (Chapter 4).
- ☐ Carburettor intake manifolds loose. Check for cracks, breaks, tears or loose clamps. Replace the rubber intake manifold joints if split or perished (Chapter 4).

Compression low

- ☐ Spark plugs loose. Remove the plugs and inspect their threads. Reinstall and tighten to the specified torque (Chapter 1).
- ☐ Cylinder head(s) not sufficiently tightened down. If either cylinder head is suspected of being loose, then there's a chance that the gasket or head is damaged if the problem has persisted for any length of time. The head nuts should be tightened to the proper torque in the correct sequence (Chapter 2).
- ☐ Improper valve clearance. This means that the valve is not closing completely and compression pressure is leaking past the valve. Check and adjust the valve clearances (Chapter 1).
- ☐ Cylinder and/or piston worn. Excessive wear will cause compression pressure to leak past the rings. This is usually accompanied by worn rings as well. A top-end overhaul is necessary (Chapter 2).
- ☐ Piston rings worn, weak, broken, or sticking. Broken or sticking piston rings usually indicate a lubrication or carburation problem that causes excess carbon deposits or seizures to form on the pistons and rings. Top-end overhaul is necessary (Chapter 2).
- ☐ Piston ring-to-groove clearance excessive. This is caused by excessive wear of the piston ring lands. Piston replacement is necessary (Chapter 2).
- ☐ Cylinder head gasket damaged. If the head is allowed to become loose, or if excessive carbon build-up on the piston crown and combustion chamber causes extremely high compression, the head gasket may leak. Retorquing the head is not always sufficient to restore the seal, so gasket replacement is necessary (Chapter 2).
- ☐ Cylinder head(s) warped. This is caused by overheating or improperly tightened head nuts. Machine shop resurfacing or head replacement is necessary (Chapter 2).
- ☐ Valve spring broken or weak. Caused by component failure or wear; the springs must be replaced (Chapter 2).
- ☐ Valve not seating properly. This is caused by a bent valve (from over-revving or improper valve adjustment), burned valve or seat (improper carburation) or an accumulation of carbon deposits on the seat (from carburation or lubrication problems). The valves must be cleaned and/or replaced and the seats serviced if possible (Chapter 2).

Poor acceleration

- ☐ Carburettors leaking or dirty. Overhaul the carburettors (Chapter 4).
- ☐ Faulty fuel pump – insufficient fuel flow. Check according to the procedure in Chapter 9.
- ☐ Fuel filter clogged. Remove the filter and replace it with a new one (Chapter 1).
- ☐ V-Boost valves stuck open, faulty servo or cables (full power models) (Chapter 4).
- ☐ Timing not advancing. Faulty ignition advance unit or its vacuum hose, or ignition control unit (Chapter 5).
- ☐ Carburettors not synchronised. Adjust them with a vacuum gauge set or manometer (Chapter 1).
- ☐ Engine oil viscosity too high. Using a heavier oil than that recommended in Chapter 1 can damage the oil pump or lubrication system and cause drag on the engine.
- ☐ Brakes dragging. Usually caused by debris which has entered the brake piston seals, or from a warped disc or bent axle. Repair as necessary (Chapter 7).

3 Poor running or no power at high speed

Firing incorrect

- ☐ Air filter restricted. Clean or replace filter (Chapter 1).
- ☐ Spark plugs fouled, defective or worn out (Chapter 1).
- ☐ Spark plug cap or HT wiring defective (Chapters 1 and 5).
- ☐ Spark plug caps not making contact. Make sure they are properly connected.
- ☐ Incorrect spark plugs. Wrong type, heat range or cap configuration. Check and install correct plugs (Chapter 1).
- ☐ Timing not advancing. Faulty ignition advance unit or its vacuum hose, or ignition control unit (Chapter 5).
- ☐ Ignition control unit defective (Chapter 5).
- ☐ Pick-up coil(s) defective (Chapter 5).
- ☐ Ignition HT coil(s) defective (Chapter 5).

Fuel/air mixture incorrect

- ☐ Air bleed holes clogged. Remove carburettor and blow out all passages (Chapter 4).
- ☐ Air filter clogged, poorly sealed or missing (Chapter 1).
- ☐ Air filter housing poorly sealed. Look for cracks, holes or loose clamps and replace or repair defective parts (Chapter 4).
- ☐ Fuel level too high or too low. Check the fuel level (Chapter 4).
- ☐ Faulty fuel pump – insufficient fuel flow. Check according to the procedure in Chapter 9.
- ☐ Fuel filter clogged. Remove the filter and replace it with a new one (Chapter 1).
- ☐ V-Boost valves stuck closed, faulty servo or cables (full power models) (Chapter 4).
- ☐ Carburettor intake manifolds loose. Check for cracks, breaks, tears or loose clamps. Replace the rubber intake manifold joints if split or perished (Chapter 4).
- ☐ Jet needle incorrectly positioned or worn Check and adjust or replace (Chapter 4).
- ☐ Main jet clogged. Dirt, water or other contaminants can clog the main jets. Clean the fuel filter, the float chamber area, and the jets and carburettor orifices (Chapter 4).
- ☐ Main jet wrong size. The standard jetting is for sea level atmospheric pressure and oxygen content. Check jet size (Chapter 4).
- ☐ Throttle shaft-to-carburettor body clearance excessive. Overhaul carburettors, replacing worn parts or complete carburettor if necessary (Chapter 4).

Compression low

- ☐ Spark plugs loose. Remove the plugs and inspect their threads. Reinstall and tighten to the specified torque (Chapter 1).
- ☐ Cylinder head(s) not sufficiently tightened down. If either cylinder head is suspected of being loose, then there's a chance that the gasket or head is damaged if the problem has persisted for any length of time. The head nuts should be tightened to the proper torque in the correct sequence (Chapter 2).
- ☐ Improper valve clearance. This means that the valve is not closing completely and compression pressure is leaking past the valve. Check and adjust the valve clearances (Chapter 1).
- ☐ Cylinder and/or piston worn. Excessive wear will cause compression pressure to leak past the rings. This is usually accompanied by worn rings as well. A top-end overhaul is necessary (Chapter 2).
- ☐ Piston rings worn, weak, broken, or sticking. Broken or sticking piston rings usually indicate a lubrication or carburation problem that causes excess carbon deposits or seizures to form on the pistons and rings. Top-end overhaul is necessary (Chapter 2).
- ☐ Piston ring-to-groove clearance excessive. This is caused by excessive wear of the piston ring lands. Piston replacement is necessary (Chapter 2).
- ☐ Cylinder head gasket damaged. If the head is allowed to become loose, or if excessive carbon build-up on the piston crown and combustion chamber causes extremely high compression, the head gasket may leak. Retorquing the head is not always sufficient to restore the seal, so gasket replacement is necessary (Chapter 2).
- ☐ Cylinder head(s) warped. This is caused by overheating or improperly tightened head nuts. Machine shop resurfacing or head replacement is necessary (Chapter 2).
- ☐ Valve spring broken or weak. Caused by component failure or wear; the springs must be replaced (Chapter 2).
- ☐ Valve not seating properly. This is caused by a bent valve (from over-revving or improper valve adjustment), burned valve or seat (improper carburation) or an accumulation of carbon deposits on the seat (from carburation or lubrication problems). The valves must be cleaned and/or replaced and the seats serviced if possible (Chapter 2).

Knocking or pinking

- ☐ Carbon build-up in combustion chambers. Use of a fuel additive that will dissolve the adhesive bonding the carbon particles to the crown and chamber is the easiest way to remove the build-up. Otherwise, the cylinder heads will have to be removed and decarbonised (Chapter 2).
- ☐ Incorrect or poor quality fuel. Old or improper grades of fuel can cause detonation. This causes the piston to rattle, thus the knocking or pinking sound. Drain old fuel and always use the recommended fuel grade (Chapter 4).
- ☐ Spark plug heat range incorrect. Uncontrolled detonation indicates the plug heat range is too hot. The plug in effect becomes a glow plug, raising cylinder temperatures. Install the proper heat range plug (Chapter 1).
- ☐ Improper air/fuel mixture. This will cause the cylinder to run hot, which leads to detonation. Clogged jets or an air leak can cause this imbalance (Chapter 4).

Miscellaneous causes

- ☐ Throttle valve doesn't open fully. Adjust the throttle grip freeplay (Chapter 1).
- ☐ Clutch slipping. May be caused by loose or worn clutch components. Overhaul clutch (Chapter 2).
- ☐ Engine oil viscosity too high. Using a heavier oil than the one recommended in Chapter 1 can damage the oil pump or lubrication system and cause drag on the engine.
- ☐ Brakes dragging. Usually caused by debris which has entered the brake piston seals, or from a warped disc or bent axle. Repair as necessary (Chapter 7).

4 Overheating

Engine overheats

- ☐ Coolant level low. Check and add coolant (Chapter 1).
- ☐ Leak in cooling system. Check cooling system hoses and radiator for leaks and other damage. Repair or renew parts as necessary (Chapter 3).
- ☐ Thermostat sticking open or closed. Test as described in Chapter 3.
- ☐ Faulty radiator cap. Remove the cap and have it pressure tested by a dealer.
- ☐ Coolant passages clogged. Have the entire system drained and flushed, then refill with fresh coolant.
- ☐ Water pump defective. Remove the pump and check the components (Chapter 3).
- ☐ Clogged radiator fins. Clean them by blowing compressed air through the fins from the rear side of the radiator.
- ☐ Cooling fan or fan switch fault (Chapter 3).

Firing incorrect

- ☐ Spark plugs fouled, defective or worn out (Chapter 1).
- ☐ Incorrect spark plugs (Chapter 1).
- ☐ Faulty ignition HT coils (Chapter 5).

Fuel/air mixture incorrect

- ☐ Main jet clogged. Dirt, water and other contaminants can clog the main jets. Clean the fuel filter, the float chamber area and the jets and carburettor orifices (Chapter 4).
- ☐ Main jet wrong size. The standard jetting is for sea level atmospheric pressure and oxygen content. Check jet size (Chapter 4).
- ☐ Air filter clogged, poorly sealed or missing (Chapter 1).
- ☐ Air filter housing poorly sealed. Look for cracks, holes or loose clamps and replace or repair (Chapter 4).
- ☐ Fuel level too low. Check the level (Chapter 4).
- ☐ Carburettor intake manifolds loose. Check for cracks, breaks, tears or loose clamps. Replace the rubber intake manifold joints if split or perished (Chapter 4).

Compression too high

- ☐ Carbon build-up in combustion chambers. Use of a fuel additive that will dissolve the adhesive bonding the carbon particles to the piston crown and chamber is the easiest way to remove the build-up. Otherwise, the cylinder heads will have to be removed and decarbonised (Chapter 2).
- ☐ Improperly machined head surface or installation of incorrect gasket during engine assembly (Chapter 2).

Engine load excessive

- ☐ Clutch slipping. Can be caused by damaged, loose or worn clutch components. Overhaul clutch (Chapter 2).
- ☐ Engine oil level too high. The addition of too much oil will cause pressurisation of the crankcase and inefficient engine operation. *Check Specifications and drain to proper level (Chapter 1).*
- ☐ Engine oil viscosity too high. Using a heavier oil than the one recommended in Chapter 1 can damage the oil pump or lubrication system as well as cause drag on the engine.
- ☐ Brakes dragging. Usually caused by debris which has entered the brake piston seals, or from a warped disc or bent axle. Repair as necessary.
- ☐ Excessive friction in moving engine parts due to inadequate lubrication, worn bearings or incorrect assembly. Overhaul engine (Chapter 2).

Lubrication inadequate

- ☐ Engine oil level too low. Friction caused by intermittent lack of lubrication or from oil that is overworked can cause overheating. The oil provides a definite cooling function in the engine. Check the oil level (Daily (pre-ride) checks).
- ☐ Poor quality engine oil or incorrect viscosity or type. Oil is rated not only according to viscosity but also according to type. Some oils are not rated high enough for use in this engine. Check the Specifications section and change to the correct oil (Chapter 1).
- ☐ Worn oil pump or clogged oil passages. Check oil pump and clean passages (Chapter 2).

Miscellaneous causes

- ☐ Engine cooling fins clogged with debris.
- ☐ Modification to exhaust system. Most aftermarket exhaust systems cause the engine to run leaner, which make them run hotter. When installing an accessory exhaust system, always rejet the carburettors.

5 Clutch problems

Clutch slipping

- ☐ Friction plates worn or warped. Overhaul the clutch assembly (Chapter 2).
- ☐ Plain plates warped (Chapter 2).
- ☐ Clutch diaphragm spring broken or weak. A worn, old or heat-damaged (from slipping clutch) spring should be replaced with a new one (Chapter 2).
- ☐ Clutch release mechanism defective. Replace any defective parts (Chapter 2).
- ☐ Clutch centre or housing unevenly worn. This causes improper engagement of the plates. Replace the damaged or worn parts (Chapter 2).

Clutch not disengaging completely

- ☐ Clutch release mechanism defective or needs bleeding. Replace any defective parts (Chapter 2).
- ☐ Clutch plates warped or damaged. This will cause clutch drag, which in turn will cause the machine to creep. Overhaul the clutch assembly (Chapter 2).
- ☐ Engine oil deteriorated. Old, thin, worn out oil will not provide proper lubrication for the plates, causing the clutch to drag. Replace the oil and filter (Chapter 1).
- ☐ Engine oil viscosity too high. Using a heavier oil than recommended in Chapter 1 can cause the plates to stick together, putting a drag on the engine. Change to the correct weight oil (Chapter 1).
- ☐ Clutch housing seized on input shaft. Lack of lubrication, severe wear or damage can cause the guide to seize on the shaft. Overhaul of the clutch, and perhaps transmission, may be necessary to repair the damage (Chapter 2).
- ☐ Loose clutch centre nut. Causes drum and centre misalignment putting a drag on the engine. Engagement adjustment continually varies. Overhaul the clutch assembly (Chapter 2).

6 Gearchange problems

Doesn't go into gear or lever doesn't return

- ☐ Clutch not disengaging. See above.
- ☐ Selector fork(s) bent or seized. Often caused by dropping the machine or from lack of lubrication. Overhaul the transmission (Chapter 2).
- ☐ Gear(s) stuck on shaft. Most often caused by a lack of lubrication or excessive wear in transmission bearings and bushes. Overhaul the transmission (Chapter 2).
- ☐ Gear selector drum binding. Caused by lubrication or bearing failure or excessive wear. Replace the drum and bearing (Chapter 2).
- ☐ Gearchange lever return spring weak or broken (Chapter 2).
- ☐ Gearchange lever broken. Splines stripped out of lever or shaft, caused by allowing the lever to get loose or from dropping the machine. Replace necessary parts (Chapter 2).
- ☐ Gearchange mechanism stopper arm broken or worn. Full engagement and rotary movement of selector drum results. Replace the arm (Chapter 2).
- ☐ Stopper arm spring broken. Allows arm to float, causing sporadic shift operation. Replace spring (Chapter 2).

Jumps out of gear

- ☐ Selector fork(s) worn. Overhaul the transmission (Chapter 2).
- ☐ Gear groove(s) worn. Overhaul the transmission (Chapter 2).
- ☐ Gear dogs or dog slots worn or damaged. The gears should be inspected and replaced. No attempt should be made to service the worn parts (Chapter 2).

Overselects

- ☐ Stopper arm spring weak or broken (Chapter 2).
- ☐ Gearchange shaft return spring post broken or distorted (Chapter 2).

7 Abnormal engine noise

Knocking or pinking

- ☐ Carbon build-up in combustion chambers. Use of a fuel additive that will dissolve the adhesive bonding the carbon particles to the piston crown and chamber is the easiest way to remove the build-up. Otherwise, the cylinder heads will have to be removed and decarbonised (Chapter 2).
- ☐ Incorrect or poor quality fuel. Old or improper fuel can cause detonation. This causes the pistons to rattle, thus the knocking or pinking sound. Drain the old fuel and always use the recommended grade fuel (Chapter 3).
- ☐ Spark plug heat range incorrect. Uncontrolled detonation indicates that the plug heat range is too hot. The plug in effect becomes a glow plug, raising cylinder temperatures. Install the proper heat range plug (Chapter 1).
- ☐ Improper air/fuel mixture. This will cause the cylinders to run hot and lead to detonation. Clogged jets or an air leak can cause this imbalance (Chapter 4).

Piston slap or rattling

- ☐ Cylinder-to-piston clearance excessive. Caused by improper assembly. Inspect and overhaul top-end parts (Chapter 2).
- ☐ Connecting rod bent. Caused by over-revving, trying to start a badly flooded engine or from ingesting a foreign object into the combustion chamber. Replace the damaged parts (Chapter 2).
- ☐ Piston pin or piston pin bore worn or seized from wear or lack of lubrication. Replace damaged parts (Chapter 2).
- ☐ Piston ring(s) worn, broken or sticking. Overhaul the top-end (Chapter 2).
- ☐ Piston seizure damage. Usually from lack of lubrication or overheating. Replace the pistons and bore the cylinders, as necessary (Chapter 2).
- ☐ Connecting rod small- or big-end clearance excessive. Caused by excessive wear or lack of lubrication. Replace worn parts (Chapter 2).

Valve noise

- ☐ Incorrect valve clearances. Adjust the clearances (Chapter 1).
- ☐ Valve spring broken or weak. Check and replace weak valve springs (Chapter 2).
- ☐ Camshafts or cylinder heads worn or damaged. Lack of lubrication at high rpm is usually the cause of damage. Insufficient oil or failure to change the oil at the recommended intervals are the chief causes. Since there are no replaceable bearings in the heads, the head(s) will have to be replaced if there is excessive wear or damage (Chapter 2).

Other noise

- ☐ Cylinder head gasket leaking (Chapter 1).
- ☐ Exhaust pipe leaking at cylinder head connection. Caused by improper fit of pipe(s) or loose exhaust flange. All exhaust fasteners should be tightened evenly and carefully. Failure to do this will lead to a leak (Chapter 3).
- ☐ Crankshaft runout excessive. Caused by a bent crankshaft (from over-revving) or damage from an upper cylinder component failure.
- ☐ Engine mounting bolts loose. Tighten all engine mount bolts (Chapter 2).
- ☐ Crankshaft (main) bearings worn (Chapter 2).
- ☐ Cam chain tensioner defective. Replace (Chapter 2).
- ☐ Cam chain, sprockets or guides worn (Chapter 2).

8 Abnormal driveline noise

Clutch noise

- ☐ Clutch housing/friction plate clearance excessive (Chapter 2).
- ☐ Loose or damaged clutch pressure plate and/or bolts (Chapter 2).

Transmission noise

- ☐ Bearings worn. Also includes the possibility that the shafts are worn. Overhaul the transmission (Chapter 2).
- ☐ Gears worn or chipped (Chapter 2).
- ☐ Metal chips jammed in gear teeth. Probably pieces from a broken clutch, gear or selector mechanism that were picked up by the gears. This will cause early bearing failure (Chapter 2).
- ☐ Engine oil level too low. Causes a howl from transmission. Also affects engine power and clutch operation (Daily (pre-ride) checks).

Final drive noise

- ☐ Final drive oil level low (Chapter 1).
- ☐ Final drive gear lash incorrect (Chapter 6).
- ☐ Final drive gears worn or damaged (Chapter 6).
- ☐ Final drive bearings worn (Chapter 6).
- ☐ Driveshaft splines worn and slipping (Chapter 6).
- ☐ Wheel coupling damper worn. Replace damper (Chapter 6).

9 Abnormal frame and suspension noise

Front end noise

- ☐ Low fluid level or improper viscosity oil in forks. This can sound like spurting and is usually accompanied by irregular fork action (Chapter 6).
- ☐ Spring weak or broken. Makes a clicking or scraping sound. Fork oil, when drained, will have a lot of metal particles in it (Chapter 6).
- ☐ Steering head bearings loose or damaged. Clicks when braking. Check and adjust or replace as necessary (Chapters 1 and 6).
- ☐ Fork yokes loose. Make sure all clamp pinch bolts are tight (Chapter 6).
- ☐ Fork tube bent. Good possibility if machine has been dropped. Replace tube with a new one (Chapter 6).
- ☐ Front axle or axle clamp bolt loose. Tighten them to the specified torque (Chapter 6).

Rear end noise

- ☐ Shock absorber fluid level incorrect. Indicates a leak caused by defective seal. Shock will be covered with oil. Replace shocks or seek advice on repair from a Yamaha dealer or suspension specialist (Chapter 6).
- ☐ Defective shock absorber with internal damage. This is in the body of the shock and can't be remedied. The shocks must be replaced with new ones (Chapter 6).
- ☐ Bent or damaged shock body. Replace the shocks as a pair (Chapter 6).
- ☐ Loose or worn shock absorber mountings. Check and tighten or renew as required (see Chapter 6).
- ☐ Swingarm pivots loose or bearings worn or damaged. Check and tighten or renew as required (Chapter 6).

Brake noise

- ☐ Squeal caused by pad shim not installed or positioned correctly (Chapter 7).
- ☐ Squeal caused by dust on brake pads. Usually found in combination with glazed pads. Clean using brake cleaning solvent (Chapter 7).
- ☐ Contamination of brake pads. Oil, brake fluid or dirt causing brake to chatter or squeal. Replace pads with new ones (Chapter 7).
- ☐ Pads glazed. Caused by excessive heat from prolonged use or from contamination. Do not use sandpaper, emery cloth, carborundum cloth or any other abrasive to roughen the pad surfaces as abrasives will stay in the pad material and damage the disc. A very fine flat file can be used, but pad replacement is suggested as a cure (Chapter 7).
- ☐ Disc warped. Can cause a chattering, clicking or intermittent squeal. Usually accompanied by a pulsating lever and uneven braking. Replace the disc (Chapter 7).
- ☐ Loose or worn wheel bearings. Check and replace as needed (Chapter 7).

10 Oil level indicator light comes on

Engine lubrication system

- ☐ Engine oil level low. Inspect for leak or other problem causing low oil level and add recommended oil (Daily (pre-ride) checks).

Electrical system

- ☐ Oil level sensor defective. Check the sensor and replace it if it is defective (Chapter 9).
- ☐ Oil level indicator light circuit defective. Check for pinched, shorted, disconnected or damaged wiring (Chapter 9).

11 Excessive exhaust smoke

White smoke

- ☐ Piston oil ring worn. The ring may be broken or damaged, causing oil from the crankcase to be pulled past the piston into the combustion chamber. Replace the rings with new ones (Chapter 2).
- ☐ Cylinders worn, cracked, or scored. Caused by overheating or oil starvation. The cylinders will have to be rebored and new pistons installed (Chapter 2).
- ☐ Valve oil seal damaged or worn. Replace oil seals with new ones (Chapter 2).
- ☐ Valve guide worn. Perform a complete valve job (Chapter 2).
- ☐ Engine oil level too high, which causes the oil to be forced past the rings. Drain oil to the proper level (Daily (pre-ride) checks).
- ☐ Head gasket broken between oil return and cylinder. Causes oil to be pulled into the combustion chamber. Replace the head gasket and check the head for warpage (Chapter 2).
- ☐ Abnormal crankcase pressurisation, which forces oil past the rings. Clogged ventilation system or breather hose (Chapter 2).

Black smoke

- ☐ Air filter clogged. Clean or replace the element (Chapter 1).
- ☐ Main jet too large or loose. Compare the jet size to the Specifications (Chapter 4).
- ☐ Choke linkage shaft stuck, causing fuel to be pulled through choke circuit (Chapter 4).
- ☐ Fuel level too high. Check the fuel level and adjust the float height(s) as necessary (Chapter 4).
- ☐ Float needle valve held off needle seat. Clean the float chambers and fuel line and replace the needles and seats if necessary (Chapter 4).
- ☐ V-Boost valves stuck open below 6000 rpm, faulty servo or cables (full power models) (Chapter 4).

Brown smoke

- ☐ Main jet too small or clogged. Lean condition caused by wrong size main jet or by a restricted orifice. Clean float chambers and jets and compare jet size to Specifications (Chapter 4).
- ☐ Fuel flow insufficient. Float needle valve stuck closed due to chemical reaction with old fuel. Float height incorrect. Restricted fuel line. Faulty fuel pump or clogged filter. Clean lines, renew filter, check pump and float chamber and check fuel levels (Chapters 1 and 4).
- ☐ Fuel level too low. Check the levels and adjust the float height(s) as necessary (Chapter 4).
- ☐ Carburettor intake manifold clamps loose (Chapter 4).
- ☐ Air filter poorly sealed or not installed (Chapter 1).
- ☐ V-Boost valves stuck closed above 6000 rpm, faulty servo or cables (full power models) (Chapter 4).

12 Poor handling or stability

Handlebar hard to turn

- ☐ Steering head bearing adjuster nut too tight. Check adjustment (Chapter 1).
- ☐ Bearings damaged. Roughness can be felt as the bars are turned from side-to-side. Replace bearings and races (Chapter 6).
- ☐ Bearings dented or worn. Denting results from wear in only one position (e.g., straight ahead), from a collision or hitting a pothole or from dropping the machine. Replace bearings (Chapter 6).
- ☐ Steering stem lubrication inadequate. Causes are grease getting hard from age or being washed out by high pressure car washes. Disassemble steering head and repack bearings (Chapter 6).
- ☐ Steering stem bent. Caused by a collision, hitting a pothole or by dropping the machine. Replace damaged part. Don't try to straighten the steering stem (Chapter 6).
- ☐ Front tyre air pressure too low (Chapter 1).

Handlebar shakes or vibrates excessively

- ☐ Tyres worn or wheels out of balance (Chapter 7).
- ☐ Swingarm bearings worn. Replace worn bearings (Chapter 6).
- ☐ Wheel rim(s) warped or damaged. Inspect wheels for runout (Chapter 7).
- ☐ Wheel bearings worn. Worn front or rear wheel bearings can cause poor tracking. Worn front bearings will cause wobble (Chapter 7).
- ☐ Handlebar clamp bolts or holder nuts loose (Chapter 6).
- ☐ Fork yoke bolts loose. Tighten them to the specified torque (Chapter 6).
- ☐ Engine mounting bolts loose or rubber mounting bushes worn. Will cause excessive vibration with increased engine rpm (Chapter 2).

Handlebar pulls to one side

- ☐ Frame bent. Definitely suspect this if the machine has been dropped. May or may not be accompanied by cracking near the bend. Replace the frame (Chapter 6).
- ☐ Wheels out of alignment. Caused by improper location of axle spacers or from bent steering stem or frame (Chapter 6).
- ☐ Swingarm bent or twisted. Caused by age (metal fatigue) or impact damage. Replace the arm (Chapter 6).
- ☐ Steering stem bent. Caused by impact damage or by dropping the motorcycle. Replace the steering stem (Chapter 6).
- ☐ Fork tube bent. Disassemble the forks and replace the damaged parts (Chapter 6).
- ☐ Fork oil level uneven. Check and add or drain as necessary (Chapter 6).

Poor shock absorbing qualities

- ☐ Too hard:
  - *a) Front fork oil level excessive (Chapter 6).*
  - *b) Front fork oil viscosity too high. Use a lighter oil (see the Specifications in Chapter 6).*
  - *c) Front fork air pressure too high. Check and adjust (Chapter 6).*
  - *d) Front fork tube bent. Causes a harsh, sticking feeling (Chapter 6).*
  - *e) Front fork internal damage (Chapter 6).*
  - *f) Rear shock shaft or body bent or damaged (Chapter 5).*
  - *g) Rear shock internal damage.*
  - *h) Tyre pressure too high (Daily (pre-ride) checks).*
- ☐ Too soft:
  - *a) Front fork or shock oil insufficient and/or leaking (Chapter 6).*
  - *b) Front fork oil level too low (Chapter 6).*
  - *c) Front fork oil viscosity too light (Chapter 6).*
  - *d) Front fork air pressure too low. Check and adjust (Chapter 6).*
  - *e) Front fork springs weak or broken (Chapter 6).*
  - *f) Rear shock internal damage or leakage (Chapter 6).*

13 Braking problems

Brakes are spongy, don't hold

- ☐ Air in brake line. Caused by inattention to master cylinder fluid level or by leakage. Locate problem and bleed brakes (Chapter 7).
- ☐ Pad or disc worn (Chapters 1 and 7).
- ☐ Brake fluid leak. Causes air in brake line. Locate problem and bleed brakes (Chapter 7).
- ☐ Contaminated pads. Caused by contamination with oil, grease, brake fluid, etc. Replace pads with new ones. Clean disc thoroughly with brake cleaner (Chapter 7).
- ☐ Brake fluid deteriorated. Fluid is old or contaminated. Drain system, replenish with new fluid and bleed the system (Chapter 7).
- ☐ Master cylinder internal parts worn or damaged causing fluid to bypass (Chapter 7).
- ☐ Master cylinder bore scratched by foreign material or broken spring. Repair or replace master cylinder (Chapter 7).
- ☐ Disc warped. Replace disc (Chapter 7).

Brake lever or pedal pulsates

- ☐ Disc warped. Replace disc (Chapter 7).
- ☐ Axle bent. Replace axle (Chapter 7).
- ☐ Brake caliper bolts loose (Chapter 7).
- ☐ Wheel warped or otherwise damaged (Chapter 7).
- ☐ Wheel bearings damaged or worn (Chapter 7).

Brakes drag

- ☐ Master cylinder piston seized. Caused by wear or damage to piston or cylinder bore (Chapter 7).
- ☐ Lever balky or stuck. Check pivot and lubricate (Chapter 7).
- ☐ Brake caliper piston seized in bore. Caused by wear or ingestion of dirt past deteriorated seal (Chapter 7).
- ☐ Brake pad damaged. Pad material separated from backing plate. Usually caused by faulty manufacturing process or from contact with chemicals. Replace pads with new ones (Chapter 7).
- ☐ Pads improperly installed (Chapter 7).
- ☐ Pads sticking on retaining pins or in caliper and not returning with pistons. Probably due to dirt and corrosion. Remove the brake pads and clean all corrosion off the retaining pins and caliper, then apply copper-based grease as described (Chapter 7). Check pad retaining pins aren't bent (Chapter 7).

14 Electrical problems

Battery dead or weak

- ☐ Battery faulty. Caused by sulphated plates which are shorted through sedimentation. Also, broken battery terminal making only occasional contact (Chapter 9).
- ☐ Battery cables making poor contact (Chapter 1).
- ☐ Load excessive. Caused by addition of high wattage lights or other electrical accessories.
- ☐ Ignition (main) switch defective. Switch either grounds (earths) internally or fails to shut off system. Replace the switch (Chapter 9).
- ☐ Regulator/rectifier defective (Chapter 9).
- ☐ Alternator stator coil open or shorted (Chapter 9).
- ☐ Wiring faulty. Wiring grounded (earthed) or connections loose in ignition, charging or lighting circuits (Chapter 9).

Battery overcharged

- ☐ Regulator/rectifier defective. Overcharging is noticed when battery gets excessively warm (Chapter 9).
- ☐ Battery defective. Replace battery with a new one (Chapter 9).
- ☐ Battery amperage too low, wrong type or size. Install manufacturer's specified amp-hour battery to handle charging load (Chapter 9).

Checking engine compression


● Low compression will result in exhaust smoke, heavy oil consumption, poor starting and poor performance. A compression test will provide useful information about an engine's condition and if performed regularly, can give warning of trouble before any other symptoms become apparent.

● A compression gauge will be required, along with an adapter to suit the spark plug hole thread size. Note that the screw-in type gauge/adapter set up is preferable to the rubber cone type.

● Before carrying out the test, first check the valve clearances as described in Chapter 1.

1 Run the engine until it reaches normal operating temperature, then stop it and remove the spark plug(s), taking care not to scald your hands on the hot components.

2 Install the gauge adapter and compression gauge in No. 1 cylinder spark plug hole **(see illustration 1)**.

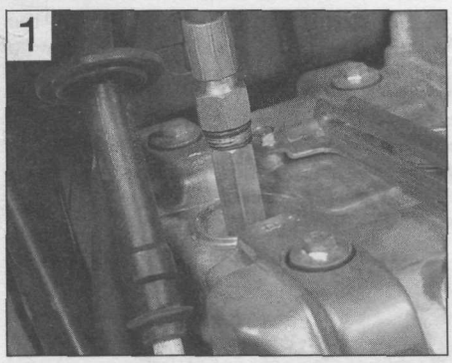


Screw the compression gauge adapter into the spark plug hole, then screw the gauge into the adapter

3 On kickstart-equipped motorcycles, make sure the ignition switch is OFF, then open the throttle fully and kick the engine over a couple of times until the gauge reading stabilises.

4 On motorcycles with electric start only, the procedure will differ depending on the nature of the ignition system. Flick the engine kill switch (engine stop switch) to OFF and turn the ignition switch ON; open the throttle fully and crank the engine over on the starter motor for a couple of revolutions until the gauge reading stabilises. If the starter will not operate with the kill switch OFF, turn the ignition switch OFF and refer to the next paragraph.

5 Install the plugs back in their caps and arrange the plug electrodes so that their metal bodies are earthed (grounded) against the cylinder heads; this is essential to prevent damage to the ignition system **(see illustration 2)**. Position the plugs well away from the plug holes otherwise there is a risk

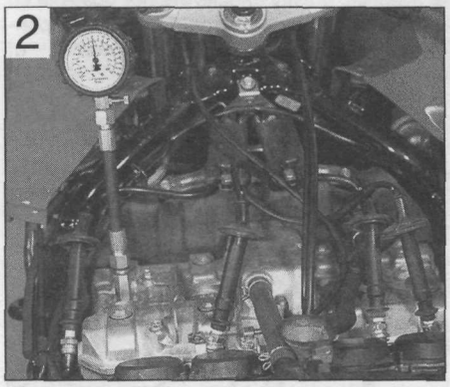

All spark plugs must be earthed (grounded) against the cylinder head


of atomised fuel escaping from the plug holes and igniting. As a safety precaution, cover the cylinder head covers with rag and disconnect the fuel pump wiring connector (see Chapter 4). Turn the ignition switch and kill switch ON, open the throttle fully and crank the engine over on the starter motor for a couple of revolutions until the gauge reading stabilises.

6 After one or two revolutions the pressure should build up to a maximum figure and then stabilise. Take a note of this reading and on multi-cylinder engines repeat the test on the remaining cylinders.

7 The correct pressures are given in Chapter 1 Specifications. If the results fall within the specified range and on multi-cylinder engines all are relatively equal, the engine is in good condition. If there is a marked difference between the readings, or if the readings are lower than specified, inspection of the top-end components will be required.

8 Low compression pressure may be due to worn cylinder bores, pistons or rings, failure of the cylinder head gasket, worn valve seals, or poor valve seating.

9 To distinguish between cylinder/piston wear and valve leakage, pour a small quantity of oil into the bore to temporarily seal the piston rings, then repeat the compression tests **(see illustration 3)**. If the readings show

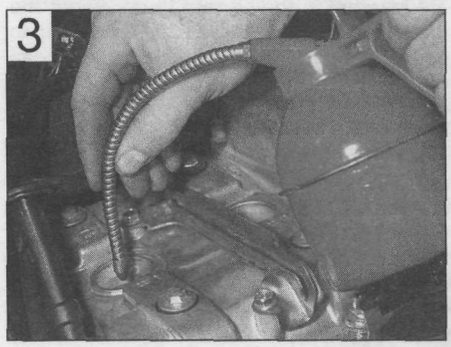


Bores can be temporarily sealed with a squirt of motor oil

a noticeable increase in pressure this confirms that the cylinder bore, piston, or rings are worn. If, however, no change is indicated, the cylinder head gasket or valves should be examined.


10 High compression pressure indicates excessive carbon build-up in the combustion chamber and on the piston crown. If this is the case the cylinder head should be removed and the deposits removed. Note that excessive carbon build-up is less likely with the used on modern fuels.

Checking battery open-circuit voltage

Warning: The gases produced by the battery are explosive - never smoke or create any sparks in the vicinity of the battery. Never allow the electrolyte to contact your skin or clothing - if it does, wash it off and seek immediate medical attention.

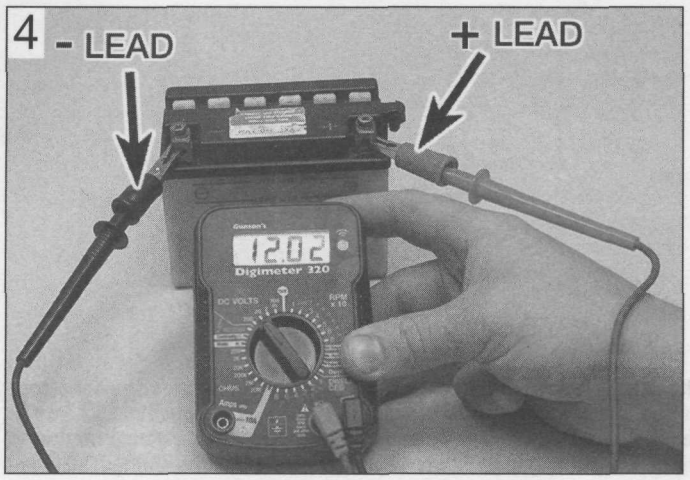

Measuring open-circuit battery voltage

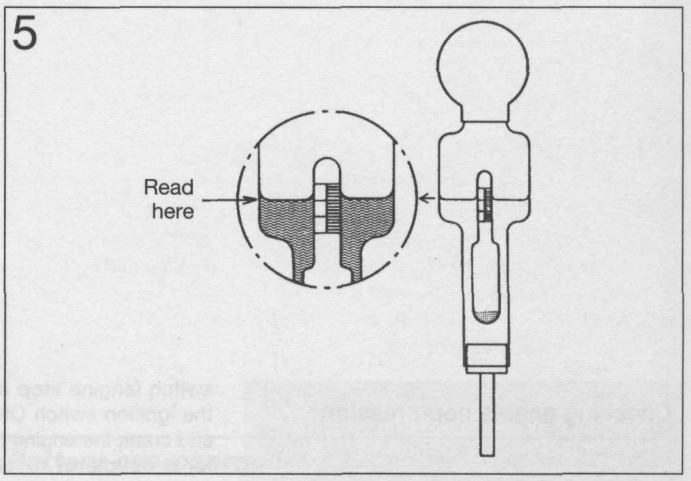

Float-type hydrometer for measuring battery specific gravity

● Before any electrical fault is investigated the battery should be checked.

● You'll need a dc voltmeter or multimeter to check battery voltage. Check that the leads are inserted in the correct terminals on the meter, red lead to positive (+ve), black lead to negative (-ve). Incorrect connections can damage the meter.

● A sound fully-charged 12 volt battery should produce between 12.3 and 12.6 volts across its terminals (12.8 volts for a maintenance-free battery). On machines with a 6 volt battery, voltage should be between 6.1 and 6.3 volts.

1 Set a multimeter to the 0 to 20 volts dc range and connect its probes across the battery terminals. Connect the meter's positive (+ve) probe, usually red, to the battery positive (+ve) terminal, followed by the meter's negative (-ve) probe, usually black, to the battery negative terminal (-ve) **(see illustration 4)**.

2 If battery voltage is low (below 10 volts on a 12 volt battery or below 4 volts on a six volt battery), charge the battery and test the voltage again. If the battery repeatedly goes flat, investigate the motorcycle's charging system.

Checking battery specific gravity (SG)

Warning: The gases produced by the battery are explosive - never smoke or create any sparks in the vicinity of the battery. Never allow the electrolyte to contact your skin or clothing - if it does, wash it off and seek immediate medical attention.

● The specific gravity check gives an indication of a battery's state of charge.

● A hydrometer is used for measuring specific gravity. Make sure you purchase one which has a small enough hose to insert in the aperture of a motorcycle battery.


● Specific gravity is simply a measure of the electrolyte's density compared with that of water. Water has an SG of 1.000 and fully-charged battery electrolyte is about 26% heavier, at 1.260.

● Specific gravity checks are not possible on maintenance-free batteries. Testing the open-circuit voltage is the only means of determining their state of charge.

1 To measure SG, remove the battery from the motorcycle and remove the first cell cap. Draw some electrolyte into the hydrometer and note the reading **(see illustration 5)**. Return the electrolyte to the cell and install the cap.

2 The reading should be in the region of 1.260 to 1.280. If SG is below 1.200 the battery needs charging. Note that SG will vary with temperature; it should be measured at 20°C (68°F). Add 0.007 to the reading for every 10°C above 20°C, and subtract 0.007 from the reading for every 10°C below 20°C. Add 0.004 to the reading for every 10°F above 68°F, and subtract 0.004 from the reading for every 10°F below 68°F.

3 When the check is complete, rinse the hydrometer thoroughly with clean water.

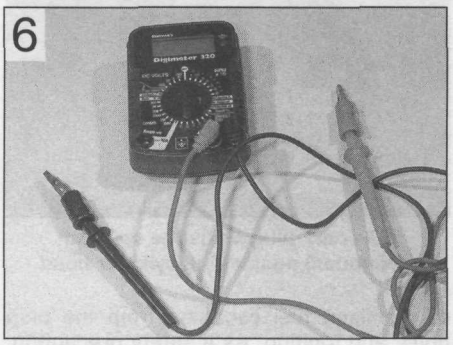


Digital multimeter can be used for all electrical tests


Checking for continuity

● The term continuity describes the uninterrupted flow of electricity through an electrical circuit. A continuity check will determine whether an **open-circuit** situation exists.


● Continuity can be checked with an ohmmeter, multimeter, continuity tester or battery and bulb test circuit **(see illustrations 6, 7 and 8)**.

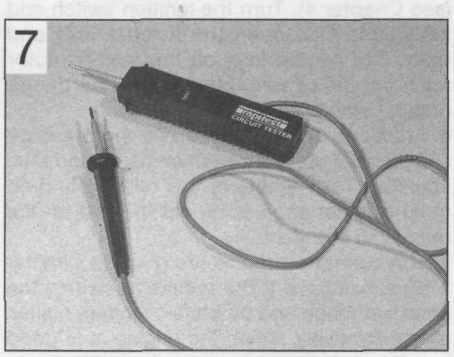


Battery-powered continuity tester

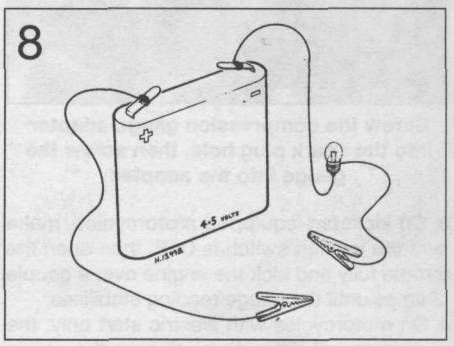

Battery and bulb test circuit

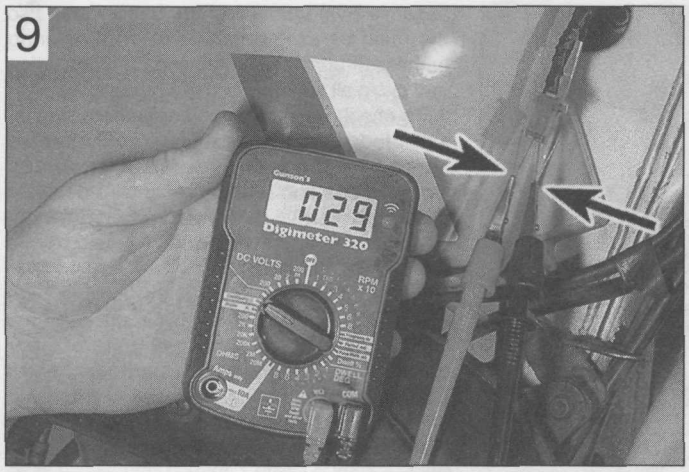

Continuity check of front brake light switch using a meter - note split pins used to access connector terminals

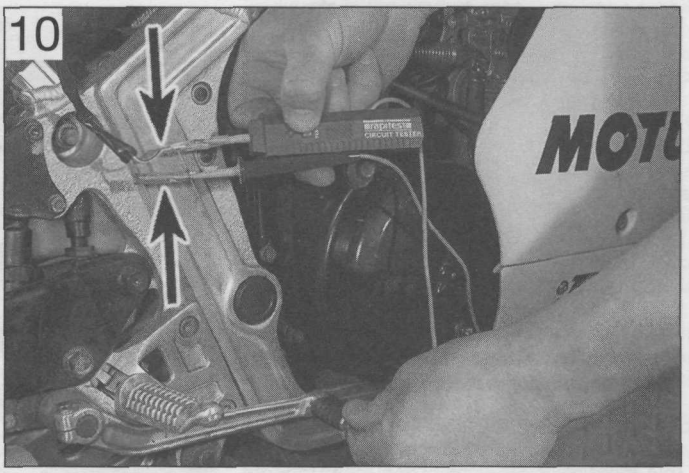

Continuity check of rear brake light switch using a continuity tester

- All of these instruments are self-powered by a battery, therefore the checks are made with the ignition OFF.
- As a safety precaution, always disconnect the battery negative (-ve) lead before making checks, particularly if ignition switch checks are being made.
- If using a meter, select the appropriate ohms scale and check that the meter reads infinity (∞). Touch the meter probes together and check that meter reads zero; where necessary adjust the meter so that it reads zero.
- After using a meter, always switch it OFF to conserve its battery.

Switch checks

1 If a switch is at fault, trace its wiring up to the wiring connectors. Separate the wire connectors and inspect them for security and condition. A build-up of dirt or corrosion here will most likely be the cause of the problem - clean up and apply a water dispersant such as WD40.

2 If using a test meter, set the meter to the ohms x 10 scale and connect its probes across the wires from the switch **(see illustration 9)**. Simple ON/OFF type switches, such as brake light switches, only have two wires whereas combination switches, like the ignition switch, have many internal links. Study the wiring diagram to ensure that you are connecting across the correct pair of wires. Continuity (low or no measurable resistance - 0 ohms) should be indicated with the switch ON and no continuity (high resistance) with it OFF.

3 Note that the polarity of the test probes doesn't matter for continuity checks, although care should be taken to follow specific test procedures if a diode or solid-state component is being checked.

4 A continuity tester or battery and bulb circuit can be used in the same way. Connect its probes as described above **(see illustration 10)**. The light should come on to indicate continuity in the ON switch position, but should extinguish in the OFF position.

Wiring checks


- Many electrical faults are caused by damaged wiring, often due to incorrect routing or chaffing on frame components.
- Loose, wet or corroded wire connectors can also be the cause of electrical problems, especially in exposed locations.

1 A continuity check can be made on a single length of wire by disconnecting it at each end and connecting a meter or continuity tester across both ends of the wire **(see illustration 11)**.


2 Continuity (low or no resistance - 0 ohms) should be indicated if the wire is good. If no continuity (high resistance) is shown, suspect a broken wire.

Checking for voltage


- A voltage check can determine whether current is reaching a component.
- Voltage can be checked with a dc voltmeter, multimeter set on the dc volts scale, test light or buzzer **(see illustrations 12 and 13)**. A meter has the advantage of being able to measure actual voltage.
- When using a meter, check that its leads are inserted in the correct terminals on the meter, red to positive (+ve), black to negative (-ve). Incorrect connections can damage the meter.
- A voltmeter (or multimeter set to the dc volts scale) should always be connected in parallel (across the load). Connecting it in series will not harm the meter, but the reading will not be meaningful.
- Voltage checks are made with the ignition ON.

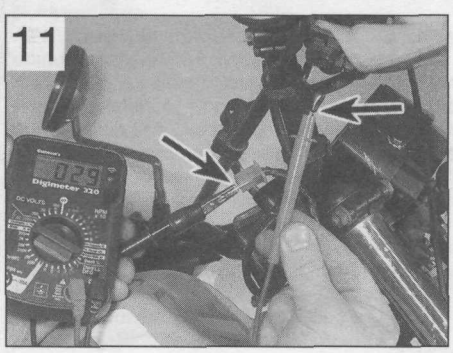


Continuity check of front brake light switch sub-harness

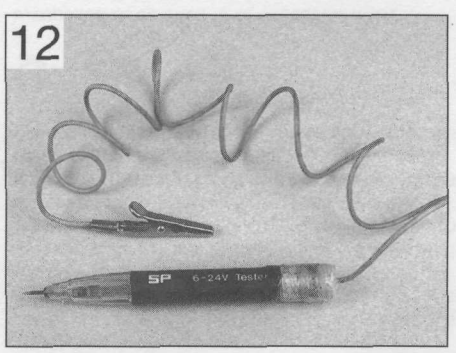

A simple test light can be used for voltage checks

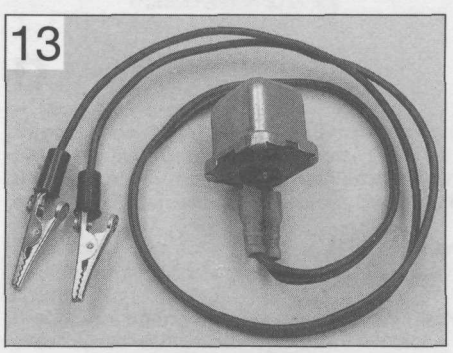


A buzzer is useful for voltage checks

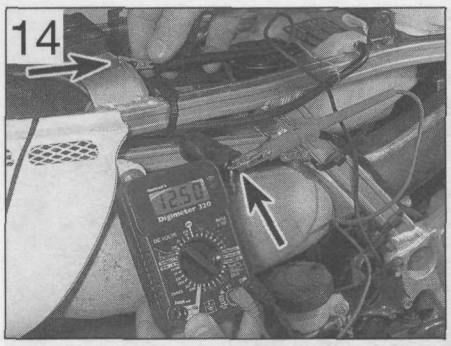


Checking for voltage at the rear brake light power supply wire using a meter . . .

1 First identify the relevant wiring circuit by referring to the wiring diagram at the end of this manual. If other electrical components share the same power supply (ie are fed from the same fuse), take note whether they are working correctly - this is useful information in deciding where to start checking the circuit.
2 If using a meter, check first that the meter leads are plugged into the correct terminals on the meter (see above). Set the meter to the dc volts function, at a range suitable for the battery voltage. Connect the meter red probe (+ve) to the power supply wire and the black probe to a good metal earth (ground) on the motorcycle's frame or directly to the battery negative (-ve) terminal **(see illustration 14)**. Battery voltage should be shown on the meter with the ignition switched ON.
3 If using a test light or buzzer, connect its positive (+ve) probe to the power supply terminal and its negative (-ve) probe to a good earth (ground) on the motorcycle's frame or directly to the battery negative (-ve) terminal **(see illustration 15)**. With the ignition ON, the test light should illuminate or the buzzer sound.
4 If no voltage is indicated, work back towards the fuse continuing to check for voltage. When you reach a point where there is voltage, you know the problem lies between that point and your last check point.

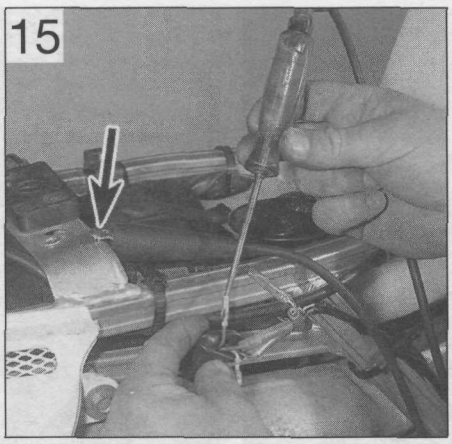

. . . or a test light - note the earth connection to the frame (arrow)

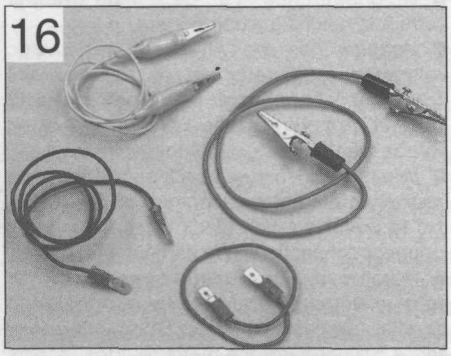

A selection of jumper wires for making earth (ground) checks

Checking the earth (ground)

● Earth connections are made either directly to the engine or frame (such as sensors, neutral switch etc. which only have a positive feed) or by a separate wire into the earth circuit of the wiring harness. Alternatively a short earth wire is sometimes run directly from the component to the motorcycle's frame.
● Corrosion is often the cause of a poor earth connection.
● If total failure is experienced, check the security of the main earth lead from the negative (-ve) terminal of the battery and also the main earth (ground) point on the wiring harness. If corroded, dismantle the connection and clean all surfaces back to bare metal.
1 To check the earth on a component, use an insulated jumper wire to temporarily bypass its earth connection **(see illustration 16)**. Connect one end of the jumper wire between the earth terminal or metal body of the component and the other end to the motorcycle's frame.
2 If the circuit works with the jumper wire installed, the original earth circuit is faulty. Check the wiring for open-circuits or poor connections. Clean up direct earth connections, removing all traces of corrosion and remake the joint. Apply petroleum jelly to the joint to prevent future corrosion.

Tracing a short-circuit


● A short-circuit occurs where current shorts to earth (ground) bypassing the circuit components. This usually results in a blown fuse.

● A short-circuit is most likely to occur where the insulation has worn through due to wiring chafing on a component, allowing a direct path to earth (ground) on the frame.

1 Remove any bodypanels necessary to access the circuit wiring.
2 Check that all electrical switches in the circuit are OFF, then remove the circuit fuse and connect a test light, buzzer or voltmeter (set to the dc scale) across the fuse terminals. No voltage should be shown.
3 Move the wiring from side to side whilst observing the test light or meter. When the test light comes on, buzzer sounds or meter shows voltage, you have found the cause of the short. It will usually shown up as damaged or burned insulation.
4 Note that the same test can be performed on each component in the circuit, even the switch.

A

ABS (Anti-lock braking system) A system, usually electronically controlled, that senses incipient wheel lockup during braking and relieves hydraulic pressure at wheel which is about to skid.
Aftermarket Components suitable for the motorcycle, but not produced by the motorcycle manufacturer.
Allen key A hexagonal wrench which fits into a recessed hexagonal hole.
Alternating current (ac) Current produced by an alternator. Requires converting to direct current by a rectifier for charging purposes.
Alternator Converts mechanical energy from the engine into electrical energy to charge the battery and power the electrical system.
Ampere (amp) A unit of measurement for the flow of electrical current. Current = Volts ÷ Ohms.
Ampere-hour (Ah) Measure of battery capacity.
Angle-tightening A torque expressed in degrees. Often follows a conventional tightening torque for cylinder head or main bearing fasteners **(see illustration)**.

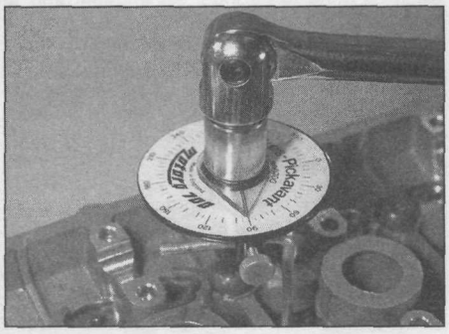


Angle-tightening cylinder head bolts

Antifreeze A substance (usually ethylene glycol) mixed with water, and added to the cooling system, to prevent freezing of the coolant in winter. Antifreeze also contains chemicals to inhibit corrosion and the formation of rust and other deposits that would tend to clog the radiator and coolant passages and reduce cooling efficiency.
Anti-dive System attached to the fork lower leg (slider) to prevent fork dive when braking hard.
Anti-seize compound A coating that reduces the risk of seizing on fasteners that are subjected to high temperatures, such as exhaust clamp bolts and nuts.
API American Petroleum Institute. A quality standard for 4-stroke motor oils.
Asbestos A natural fibrous mineral with great heat resistance, commonly used in the composition of brake friction materials. Asbestos is a health hazard and the dust created by brake systems should never be inhaled or ingested.
ATF Automatic Transmission Fluid. Often used in front forks.
ATU Automatic Timing Unit. Mechanical device for advancing the ignition timing on early engines.
ATV All Terrain Vehicle. Often called a Quad.
Axial play Side-to-side movement.
Axle A shaft on which a wheel revolves. Also known as a spindle.

B

Backlash The amount of movement between meshed components when one component is held still. Usually applies to gear teeth.
Ball bearing A bearing consisting of a hardened inner and outer race with hardened steel balls between the two races.
Bearings Used between two working surfaces to prevent wear of the components and a build-up of heat. Four types of bearing are commonly used on motorcycles: plain shell bearings, ball bearings, tapered roller bearings and needle roller bearings.
Bevel gears Used to turn the drive through 90°. Typical applications are shaft final drive and camshaft drive **(see illustration)**.

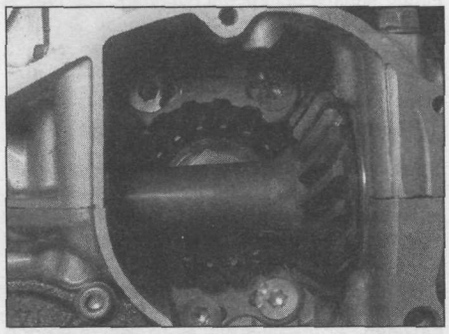


Bevel gears are used to turn the drive through 90°

BHP Brake Horsepower. The British measurement for engine power output. Power output is now usually expressed in kilowatts (kW).
Bias-belted tyre Similar construction to radial tyre, but with outer belt running at an angle to the wheel rim.
Big-end bearing The bearing in the end of the connecting rod that's attached to the crankshaft.
Bleeding The process of removing air from an hydraulic system via a bleed nipple or bleed screw.
Bottom-end A description of an engine's crankcase components and all components contained there-in.
BTDC Before Top Dead Centre in terms of piston position. Ignition timing is often expressed in terms of degrees or millimetres BTDC.
Bush A cylindrical metal or rubber component used between two moving parts.
Burr Rough edge left on a component after machining or as a result of excessive wear.

C

Cam chain The chain which takes drive from the crankshaft to the camshaft(s).
Canister The main component in an evaporative emission control system (California market only); contains activated charcoal granules to trap vapours from the fuel system rather than allowing them to vent to the atmosphere.
Castellated Resembling the parapets along the top of a castle wall. For example, a castellated wheel axle or spindle nut.
Catalytic converter A device in the exhaust system of some machines which converts certain pollutants in the exhaust gases into less harmful substances.
Charging system Description of the components which charge the battery, ie the alternator, rectifer and regulator.
Circlip A ring-shaped clip used to prevent endwise movement of cylindrical parts and shafts. An internal circlip is installed in a groove in a housing; an external circlip fits into a groove on the outside of a cylindrical piece such as a shaft. Also known as a snap-ring.
Clearance The amount of space between two parts. For example, between a piston and a cylinder, between a bearing and a journal, etc.
Coil spring A spiral of elastic steel found in various sizes throughout a vehicle, for example as a springing medium in the suspension and in the valve train.
Compression Reduction in volume, and increase in pressure and temperature, of a gas, caused by squeezing it into a smaller space.
Compression damping Controls the speed the suspension compresses when hitting a bump.
Compression ratio The relationship between cylinder volume when the piston is at top dead centre and cylinder volume when the piston is at bottom dead centre.
Continuity The uninterrupted path in the flow of electricity. Little or no measurable resistance.
Continuity tester Self-powered bleeper or test light which indicates continuity.
Cp Candlepower. Bulb rating commonly found on US motorcycles.
Crossply tyre Tyre plies arranged in a criss-cross pattern. Usually four or six plies used, hence 4PR or 6PR in tyre size codes.
Cush drive Rubber damper segments fitted between the rear wheel and final drive sprocket to absorb transmission shocks **(see illustration)**.

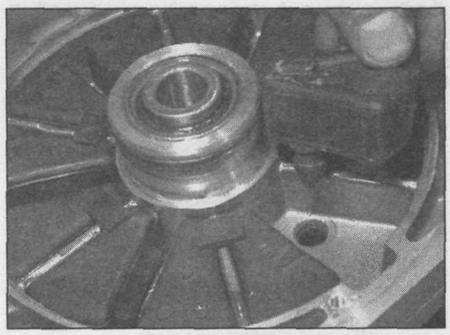

Cush drive rubbers dampen out transmission shocks

D

Degree disc Calibrated disc for measuring piston position. Expressed in degrees.
Dial gauge Clock-type gauge with adapters for measuring runout and piston position. Expressed in mm or inches.
Diaphragm The rubber membrane in a master cylinder or carburettor which seals the upper chamber.
Diaphragm spring A single sprung plate often used in clutches.
Direct current (dc) Current produced by a dc generator.

Decarbonisation The process of removing carbon deposits - typically from the combustion chamber, valves and exhaust port/system.
Detonation Destructive and damaging explosion of fuel/air mixture in combustion chamber instead of controlled burning.
Diode An electrical valve which only allows current to flow in one direction. Commonly used in rectifiers and starter interlock systems.
Disc valve (or rotary valve) A induction system used on some two-stroke engines.
Double-overhead camshaft (DOHC) An engine that uses two overhead camshafts, one for the intake valves and one for the exhaust valves.
Drivebelt A toothed belt used to transmit drive to the rear wheel on some motorcycles. A drivebelt has also been used to drive the camshafts. Drivebelts are usually made of Kevlar.
Driveshaft Any shaft used to transmit motion. Commonly used when referring to the final driveshaft on shaft drive motorcycles.

E

Earth return The return path of an electrical circuit, utilising the motorcycle's frame.
ECU (Electronic Control Unit) A computer which controls (for instance) an ignition system, or an anti-lock braking system.
EGO Exhaust Gas Oxygen sensor. Sometimes called a Lambda sensor.
Electrolyte The fluid in a lead-acid battery.
EMS (Engine Management System) A computer controlled system which manages the fuel injection and the ignition systems in an integrated fashion.
Endfloat The amount of lengthways movement between two parts. As applied to a crankshaft, the distance that the crankshaft can move side-to-side in the crankcase.
Endless chain A chain having no joining link. Common use for cam chains and final drive chains.
EP (Extreme Pressure) Oil type used in locations where high loads are applied, such as between gear teeth.
Evaporative emission control system Describes a charcoal filled canister which stores fuel vapours from the tank rather than allowing them to vent to the atmosphere. Usually only fitted to California models and referred to as an EVAP system.
Expansion chamber Section of two-stroke engine exhaust system so designed to improve engine efficiency and boost power.

F


Feeler blade or gauge A thin strip or blade of hardened steel, ground to an exact thickness, used to check or measure clearances between parts.
Final drive Description of the drive from the transmission to the rear wheel. Usually by chain or shaft, but sometimes by belt.
Firing order The order in which the engine cylinders fire, or deliver their power strokes, beginning with the number one cylinder.
Flooding Term used to describe a high fuel level in the carburettor float chambers, leading to fuel overflow. Also refers to excess fuel in the combustion chamber due to incorrect starting technique.
Free length The no-load state of a component when measured. Clutch, valve and fork spring lengths are measured at rest, without any preload.
Freeplay The amount of travel before any action takes place. The looseness in a linkage, or an assembly of parts, between the initial application of force and actual movement. For example, the distance the rear brake pedal moves before the rear brake is actuated.
Fuel injection The fuel/air mixture is metered electronically and directed into the engine intake ports (indirect injection) or into the cylinders (direct injection). Sensors supply information on engine speed and conditions.
Fuel/air mixture The charge of fuel and air going into the engine. See **Stoichiometric ratio**.
Fuse An electrical device which protects a circuit against accidental overload. The typical fuse contains a soft piece of metal which is calibrated to melt at a predetermined current flow (expressed as amps) and break the circuit.

G

Gap The distance the spark must travel in jumping from the centre electrode to the side electrode in a spark plug. Also refers to the distance between the ignition rotor and the pickup coil in an electronic ignition system.
Gasket Any thin, soft material - usually cork, cardboard, asbestos or soft metal - installed between two metal surfaces to ensure a good seal. For instance, the cylinder head gasket seals the joint between the block and the cylinder head.
Gauge An instrument panel display used to monitor engine conditions. A gauge with a movable pointer on a dial or a fixed scale is an analogue gauge. A gauge with a numerical readout is called a digital gauge.
Gear ratios The drive ratio of a pair of gears in a gearbox, calculated on their number of teeth.
Glaze-busting see **Honing**
Grinding Process for renovating the valve face and valve seat contact area in the cylinder head.
Gudgeon pin The shaft which connects the connecting rod small-end with the piston. Often called a piston pin or wrist pin.

H

Helical gears Gear teeth are slightly curved and produce less gear noise that straight-cut gears. Often used for primary drives.

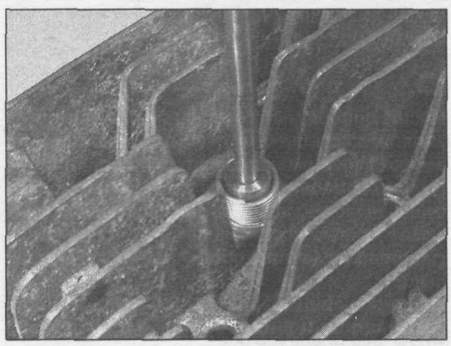

Installing a Helicoil thread insert in a cylinder head

Helicoil A thread insert repair system. Commonly used as a repair for stripped spark plug threads **(see illustration)**.
Honing A process used to break down the glaze on a cylinder bore (also called glaze-busting). Can also be carried out to roughen a rebored cylinder to aid ring bedding-in.
HT (High Tension) Description of the electrical circuit from the secondary winding of the ignition coil to the spark plug.
Hydraulic A liquid filled system used to transmit pressure from one component to another. Common uses on motorcycles are brakes and clutches.
Hydrometer An instrument for measuring the specific gravity of a lead-acid battery.
Hygroscopic Water absorbing. In motorcycle applications, braking efficiency will be reduced if DOT 3 or 4 hydraulic fluid absorbs water from the air - care must be taken to keep new brake fluid in tightly sealed containers.

I

lbf ft Pounds-force feet. An imperial unit of torque. Sometimes written as ft-lbs.
lbf in Pound-force inch. An imperial unit of torque, applied to components where a very low torque is required. Sometimes written as in-lbs.
IC Abbreviation for Integrated Circuit.
Ignition advance Means of increasing the timing of the spark at higher engine speeds. Done by mechanical means (ATU) on early engines or electronically by the ignition control unit on later engines.
Ignition timing The moment at which the spark plug fires, expressed in the number of crankshaft degrees before the piston reaches the top of its stroke, or in the number of millimetres before the piston reaches the top of its stroke.
Infinity (∞) Description of an open-circuit electrical state, where no continuity exists.
Inverted forks (upside down forks) The sliders or lower legs are held in the yokes and the fork tubes or stanchions are connected to the wheel axle (spindle). Less unsprung weight and stiffer construction than conventional forks.

J

JASO Quality standard for 2-stroke oils.
Joule The unit of electrical energy.
Journal The bearing surface of a shaft.

K

Kickstart Mechanical means of turning the engine over for starting purposes. Only usually fitted to mopeds, small capacity motorcycles and off-road motorcycles.
Kill switch Handebar-mounted switch for emergency ignition cut-out. Cuts the ignition circuit on all models, and additionally prevent starter motor operation on others.
km Symbol for kilometre.
kmh Abbreviation for kilometres per hour.


L

Lambda (λ) sensor A sensor fitted in the exhaust system to measure the exhaust gas oxygen content (excess air factor).

Lapping *see* **Grinding**.
LCD Abbreviation for Liquid Crystal Display.
LED Abbreviation for Light Emitting Diode.
Liner A steel cylinder liner inserted in a aluminium alloy cylinder block.
Locknut A nut used to lock an adjustment nut, or other threaded component, in place.
Lockstops The lugs on the lower triple clamp (yoke) which abut those on the frame, preventing handlebar-to-fuel tank contact.
Lockwasher A form of washer designed to prevent an attaching nut from working loose.
LT Low Tension Description of the electrical circuit from the power supply to the primary winding of the ignition coil.

M

Main bearings The bearings between the crankshaft and crankcase.
Maintenance-free (MF) battery A sealed battery which cannot be topped up.
Manometer Mercury-filled calibrated tubes used to measure intake tract vacuum. Used to synchronise carburettors on multi-cylinder engines.
Micrometer A precision measuring instrument that measures component outside diameters ***(see illustration)***.

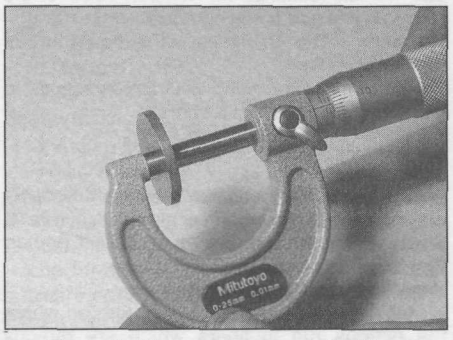

Tappet shims are measured with a micrometer

MON (Motor Octane Number) A measure of a fuel's resistance to knock.
Monograde oil An oil with a single viscosity, eg SAE80W.
Monoshock A single suspension unit linking the swingarm or suspension linkage to the frame.
mph Abbreviation for miles per hour.
Multigrade oil Having a wide viscosity range (eg 10W40). The W stands for Winter, thus the viscosity ranges from SAE10 when cold to SAE40 when hot.
Multimeter An electrical test instrument with the capability to measure voltage, current and resistance. Some meters also incorporate a continuity tester and buzzer.

N

Needle roller bearing Inner race of caged needle rollers and hardened outer race. Examples of uncaged needle rollers can be found on some engines. Commonly used in rear suspension applications and in two-stroke engines.
Nm Newton metres.
NOx Oxides of Nitrogen. A common toxic pollutant emitted by petrol engines at higher temperatures.

O


Octane The measure of a fuel's resistance to knock.
OE (Original Equipment) Relates to components fitted to a motorcycle as standard *or replacement parts supplied by the motorcycle* manufacturer.
Ohm The unit of electrical resistance. Ohms = *Volts ÷ Current*.
Ohmmeter An instrument for measuring electrical resistance.
Oil cooler *System for diverting engine oil* outside of the engine to a radiator for cooling purposes.
Oil injection A system of two-stroke engine lubrication where oil is pump-fed to the engine in accordance with throttle position.
Open-circuit An electrical condition where there is a break in the flow of electricity - no continuity (high resistance).
O-ring A type of sealing ring made of a special rubber-like material; in use, the O-ring is compressed into a groove to provide the sealing action.
Oversize (OS) Term used for piston and ring size options fitted to a rebored cylinder.
Overhead cam (sohc) engine An engine with single camshaft located on top of the cylinder head.
Overhead valve (ohv) engine An engine with the valves located in the cylinder head, but with the camshaft located in the engine block or crankcase.
Oxygen sensor A device installed in the exhaust system which senses the oxygen content in the exhaust and converts this information into an electric current. Also called a Lambda sensor.

P

Plastigauge A thin strip of plastic thread, available in different sizes, used for measuring clearances. For example, a strip of Plastigauge is *laid across a bearing journal. The parts are* assembled and dismantled; the width of the crushed strip indicates the clearance between *journal and bearing.*
Polarity Either negative or positive earth (ground), determined by which battery lead is *connected to the frame (earth return).* Modern motorcycles are usually negative earth.
Pre-ignition A situation where the fuel/air *mixture ignites before the spark plug fires. Often* due to a hot spot in the combustion chamber caused by carbon build-up. Engine has a *tendency to 'run-on'.*
Pre-load (suspension) The amount a spring is compressed when in the unloaded state. Preload *can be applied by gas, spacer or mechanical* adjuster.
Premix The method of engine lubrication on *older two-stroke engines. Engine oil is mixed* with the petrol in the fuel tank in a specific ratio. The fuel/oil mix is sometimes referred to as "petroil".
Primary drive Description of the drive from the crankshaft to the clutch. Usually by gear or chain.
PS Pfedestärke - a German interpretation of BHP.
PSI Pounds-force per square inch. Imperial measurement of tyre pressure and cylinder pressure measurement.
PTFE Polytetrafluroethylene. A low friction substance.
Pulse secondary air injection system A process of promoting the burning of excess fuel present in the exhaust gases by routing fresh air into the exhaust ports.

Q


Quartz halogen bulb Tungsten filament surrounded by a halogen gas. Typically used for the headlight **(see illustration)**.

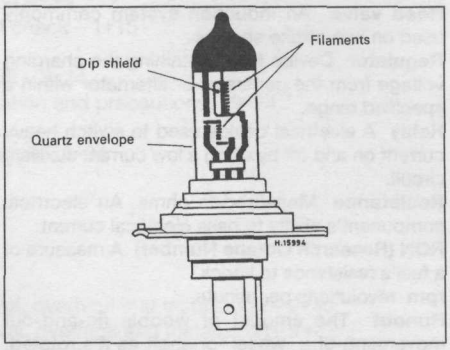

Quartz halogen headlight bulb construction

R

Rack-and-pinion *A pinion gear on the end of a* shaft that mates with a rack (think of a geared wheel opened up and laid flat). Sometimes used in clutch operating systems.
Radial play Up and down movement about a shaft.
Radial ply tyres Tyre plies run across the tyre (from bead to bead) and around the circumference of the tyre. Less resistant to tread distortion than other tyre types.
Radiator A liquid-to-air heat transfer device designed to reduce the temperature of the coolant in a liquid cooled engine.
Rake A feature of steering geometry - the angle of the steering head in relation to the vertical **(see illustration).**

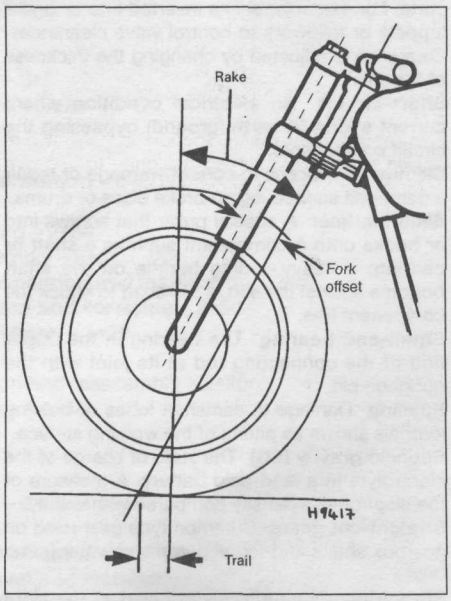

Steering geometry

Rebore Providing a new working surface to the cylinder bore by boring out the old surface. Necessitates the use of oversize piston and rings.
Rebound damping A means of controlling the oscillation of a suspension unit spring after it has been compressed. Resists the spring's natural tendency to bounce back after being compressed.
Rectifier Device for converting the ac output of an alternator into dc for battery charging.
Reed valve An induction system commonly used on two-stroke engines.
Regulator Device for maintaining the charging voltage from the generator or alternator within a specified range.
Relay A electrical device used to switch heavy current on and off by using a low current auxiliary circuit.
Resistance Measured in ohms. An electrical component's ability to pass electrical current.
RON (Research Octane Number) A measure of a fuel's resistance to knock.
rpm revolutions per minute.
Runout The amount of wobble (in-and-out movement) of a wheel or shaft as it's rotated. The amount a shaft rotates 'out-of-true'. The out-of-round condition of a rotating part.

S

SAE (Society of Automotive Engineers) A standard for the viscosity of a fluid.
Sealant A liquid or paste used to prevent leakage at a joint. Sometimes used in conjunction with a gasket.
Service limit Term for the point where a component is no longer useable and must be renewed.
Shaft drive A method of transmitting drive from the transmission to the rear wheel.
Shell bearings Plain bearings consisting of two shell halves. Most often used as big-end and main bearings in a four-stroke engine. Often called bearing inserts.
Shim Thin spacer, commonly used to adjust the clearance or relative positions between two parts. For example, shims inserted into or under tappets or followers to control valve clearances. Clearance is adjusted by changing the thickness of the shim.
Short-circuit An electrical condition where current shorts to earth (ground) bypassing the circuit components.
Skimming Process to correct warpage or repair a damaged surface, eg on brake discs or drums.
Slide-hammer A special puller that screws into or hooks onto a component such as a shaft or bearing; a heavy sliding handle on the shaft bottoms against the end of the shaft to knock the component free.
Small-end bearing The bearing in the upper end of the connecting rod at its joint with the gudgeon pin.
Spalling Damage to camshaft lobes or bearing journals shown as pitting of the working surface.
Specific gravity (SG) The state of charge of the electrolyte in a lead-acid battery. A measure of the electrolyte's density compared with water.
Straight-cut gears Common type gear used on gearbox shafts and for oil pump and water pump drives.
Stanchion The inner sliding part of the front forks, held by the yokes. Often called a fork tube.
Stoichiometric ratio The optimum chemical air/fuel ratio for a petrol engine, said to be 14.7 parts of air to 1 part of fuel.
Sulphuric acid The liquid (electrolyte) used in a lead-acid battery. Poisonous and extremely corrosive.
Surface grinding (lapping) Process to correct a warped gasket face, commonly used on cylinder heads.

T

Tapered-roller bearing Tapered inner race of caged needle rollers and separate tapered outer race. Examples of taper roller bearings can be found on steering heads.
Tappet A cylindrical component which transmits motion from the cam to the valve stem, either directly or via a pushrod and rocker arm. Also called a cam follower.
TCS Traction Control System. An electronically-controlled system which senses wheel spin and reduces engine speed accordingly.
TDC Top Dead Centre denotes that the piston is at its highest point in the cylinder.
Thread-locking compound Solution applied to fastener threads to prevent slackening. Select type to suit application.
Thrust washer A washer positioned between two moving components on a shaft. For example, between gear pinions on gearshaft.
Timing chain See **Cam Chain.**
Timing light Stroboscopic lamp for carrying out ignition timing checks with the engine running.
Top-end A description of an engine's cylinder block, head and valve gear components.
Torque Turning or twisting force about a shaft.
Torque setting A prescribed tightness specified by the motorcycle manufacturer to ensure that the bolt or nut is secured correctly. Undertightening can result in the bolt or nut coming loose or a surface not being sealed. Overtightening can result in stripped threads, distortion or damage to the component being retained.
Torx key A six-point wrench.
Tracer A stripe of a second colour applied to a wire insulator to distinguish that wire from another one with the same colour insulator. For example, Br/W is often used to denote a brown insulator with a white tracer.
Trail A feature of steering geometry. Distance from the steering head axis to the tyre's central contact point.
Triple clamps The cast components which extend from the steering head and support the fork stanchions or tubes. Often called fork yokes.
Turbocharger A centrifugal device, driven by exhaust gases, that pressurises the intake air. Normally used to increase the power output from a given engine displacement.
TWI Abbreviation for Tyre Wear Indicator. Indicates the location of the tread depth indicator bars on tyres.

U


Universal joint or U-joint (UJ) A double-pivoted connection for transmitting power from a driving to a driven shaft through an angle. Typically found in shaft drive assemblies.
Unsprung weight Anything not supported by the bike's suspension (ie the wheel, tyres, brakes, final drive and bottom (moving) part of the suspension).

V

Vacuum gauges Clock-type gauges for measuring intake tract vacuum. Used for carburettor synchronisation on multi-cylinder engines.
Valve A device through which the flow of liquid, gas or vacuum may be stopped, started or regulated by a moveable part that opens, shuts or partially obstructs one or more ports or passageways. The intake and exhaust valves in the cylinder head are of the poppet type.
Valve clearance The clearance between the valve tip (the end of the valve stem) and the rocker arm or tappet/follower. The valve clearance is measured when the valve is closed. The correct clearance is important - if too small the valve won't close fully and will burn out, whereas if too large noisy operation will result.
Valve lift The amount a valve is lifted off its seat by the camshaft lobe.
Valve timing The exact setting for the opening and closing of the valves in relation to piston position.
Vernier caliper A precision measuring instrument that measures inside and outside dimensions. Not quite as accurate as a micrometer, but more convenient.
VIN Vehicle Identification Number. Term for the bike's engine and frame numbers.
Viscosity The thickness of a liquid or its resistance to flow.
Volt A unit for expressing electrical "pressure" in a circuit. Volts = current x ohms.

W

Water pump A mechanically-driven device for moving coolant around the engine.
Watt A unit for expressing electrical power. Watts = volts x current.
Wear limit see **Service limit**
Wet liner A liquid-cooled engine design where the pistons run in liners which are directly surrounded by coolant **(see illustration)**.

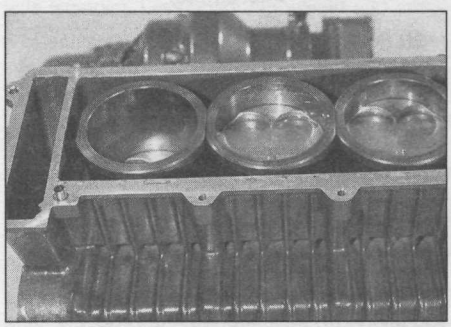

Wet liner arrangement

Wheelbase Distance from the centre of the front wheel to the centre of the rear wheel.
Wiring harness or loom Describes the electrical wires running the length of the motorcycle and enclosed in tape or plastic sheathing. Wiring coming off the main harness is usually referred to as a sub harness.
Woodruff key A key of semi-circular or square section used to locate a gear to a shaft. Often used to locate the alternator rotor on the crankshaft.
Wrist pin Another name for gudgeon or piston pin.

Note: *References throughout this index are in the form - "Chapter number" • "Page number"*

A

About this Manual – 0•8
Acknowledgements – 0•8
Advance unit check, removal and installation – 5•7
Air filter
cleaning – 1•9
housing removal and installation – 4•3
renewal – 1•20
Air/fuel mixture adjustment – 4•6
Alternator rotor and stator check, removal and installation – 9•25

B

Balancer shaft and bearings removal, inspection and installation – 2•59
Battery
charging – 9•4
check – 1•12
removal, installation, inspection and maintenance – 9•3
Bike spec – 0•11
Bleeding and fluid change
brake system – 7•11
clutch – 2•34
Bodywork – 8•1 *et seq*
covers – 8•2
fork brace – 8•3
mirrors – 8•4
mudguard – 8•3
seats – 8•1
Brake fluid
change – 1•28
level checks – 0•14
Brake hoses renewal – 1•28
Brake light
bulb renewal – 9•7
check – 9•6
switches check and renewal – 9•10
Brake pad wear check – 1•11
Brake pedal removal and installation – 6•2
Brake system check – 1•11
Brake system seals renewal – 1•28
Brakes, wheels and tyres – 7•1 *et seq*
bleeding brakes – 7•11
calipers – 7•4, 7•6
discs – 7•4
fluid change – 7•11
hoses and unions – 7•10
master cylinder – 7•7, 7•9
pads – 7•2
tyres – 7•18
wheels – 7•12, 7•13, 7•14, 7•15
Buying spare parts – 0•9

C

Cables
lubrication – 1•14
throttle
check – 1•14
removal and installation – 4•19
Calipers removal, overhaul and installation
front – 7•4
rear – 7•6
Cam chain removal, inspection and installation – 2•17
Cam chain tensioners removal and installation – 2•11
Camshafts and followers removal, inspection and installation – 2•12
Carburettors
disassembly, cleaning and inspection – 4•7
overhaul general information – 4•6
reassembly and fuel level check – 4•11
removal and installation – 4•6
separation and joining – 4•10
synchronisation – 1•7
Centrestand
removal and installation – 6•4
starter interlock circuit check – 1•15
Charging system
leakage and output test – 9•24
testing general information and precautions – 9•24
Clutch
bleeding and fluid change – 2•34
check – 1•18
fluid
change – 1•28
level check – 0•15
hoses renewal – 1•28
master cylinder removal, overhaul and installation – 2•30
release cylinder removal, overhaul and installation – 2•32
removal, inspection and installation – 2•25
switch check and renewal – 9•17
system seals renewal – 1•28
Coils
check, removal and installation – 5•2
check and renewal – 5•5
Connecting rod and bearings
general information – 2•56
removal, inspection and installation – 2•41
Contents – 0•2
Control unit check, removal and installation – 5•6
Conversion factors – REF•26
Coolant
change – 1•26
level check – 0•15
reservoir removal and installation – 3•9
Cooling fan and fan switch check and replacement – 3•2
Cooling system – 3•1 *et seq*
check – 1•10
coolant reservoir – 3•9
fan and fan switch – 3•2
hoses and unions – 3•9
radiator – 3•5
radiator pressure cap – 3•2
temperature gauge and sender – 3•3
thermostat and housing – 3•4
water pump – 3•6
Covers removal and installation – 8•2
Crankcase halves
inspection and servicing – 2•54
separation and reassembly – 2•51
Crankshaft removal, inspection and installation – 2•57
Cylinder bores inspection and servicing – 2•54
Cylinder compression check – 1•28
Cylinder heads
disassembly, inspection and reassembly – 2•20
removal and installation – 2•18

D

Daily (pre-ride) checks – 0•13 *et seq*
Data – 0•10
Diode block check and renewal – 9•17
Discs inspection, removal and installation – 7•4
Driveshaft removal, inspection and installation – 6•19

E

Electrical system – 9•1 *et seq*
alternator – 9•25
battery – 9•3, 9•4
brake light – 9•6, 9•7, 9•10
charging system – 9•24
clutch switch – 9•17
diode block – 9•17
fault finding – 9•22
fuses – 9•4
handlebar switches – 9•14
headlight – 9•5, 9•6, 9•7
horn – 9•18
ignition (main) switch – 9•13
instruments – 9•10, 9•11, 9•12
lighting system – 9•5
neutral switch – 9•14
oil level sensor – 9•18
regulator/rectifier – 9•27
relays – 9•16, 9•17, 9•19
sidelight – 9•5, 9•6
sidestand switch and relay – 9•16
speedometer – 9•10, 9•11
starter circuit cut-off relay – 9•17
starter motor – 9•20
starter relay – 9•19
switches – 9•13, 9•14, 9•16, 9•17
tachometer – 9•12
tail light – 9•5, 9•8
temperature gauge – 9•12
turn signal – 9•6, 9•8. 9•9
warning light bulbs – 9•12
wiring diagrams – 9•29 *et seq*
Engine numbers – 0•9
Engine oil
change – 1•12, 1•18
level check – 0•13
pressure check – 1•28
Engine, clutch and transmission – 2•1 *et seq*
balancer shaft and bearings – 2•59
cam chain – 2•17
cam chain tensioners – 2•11
camshafts and followers – 2•12
clutch – 2•25
clutch bleeding and fluid change – 2•34
clutch master cylinder – 2•30
clutch release cylinder – 2•32
connecting rods and bearings – 2•41, 2•56
crankcase halves – 2•51, 2•54
crankshaft – 2•57
cylinder bores – 2•54
cylinder heads – 2•18, 2•20
disassembly and reassembly – 2•10
followers – 2•12
gearchange mechanism – 2•35
guide blades – 2•17
main bearings – 2•56, 2•57
middle gear assembly – 2•47
oil pump – 2•36, 2•39
operations possible with the engine in the frame – 2•5
operations requiring engine removal – 2•5
piston rings – 2•46
pistons – 2•44
removal and installation – 2•5
running-in procedure – 2•67
selector drum and forks – 2•656
starter clutch – 2•24
start-up after overhaul – 2•66
tensioner blade – 2•17
transmission shafts and bearings – 2•60, 2•62
valve covers – 2•10
valves – 2•20
Evaporative emission control (EVAP) system check – 1•7
Exhaust system removal and installation – 4•20

F

Fan and fan switch check and replacement – 3•2
Fault finding – REF•35 *et seq*
electrical system – 9•22
Fault finding equipment – REF•35 *et seq*
Filters
air – 1•9, 1•20, 4•3
fuel – 1•21
oil – 1•18
Final drive – 0•16
oil change – 1•20
oil level check – 1•14
removal, inspection and installation – 6•19
Fluids – REF•23 *et seq*
Followers removal, inspection and installation – 2•12
Footrests removal and installation – 6•2
Fork brace removal and installation – 8•3
Forks disassembly, inspection and reassembly – 6•8
Forks
adjustments – 6•15
oil change – 1•28, 6•6
removal and installation – 6•6
Frame and engine numbers – 0•9
Frame inspection and repair – 6•2
Frame, suspension and final drive – 6•1 *et seq*
brake pedal – 6•2
centrestand – 6•4
driveshaft – 6•19
final drive – 6•19
footrest – 6•2
fork oil – 6•6
forks – 6•6, 6•8, 6•15
frame – 6•2
gearchange lever – 6•2
handlebars – 6•4
levers – 6•4
rear shock absorbers – 6•15, 6•16
sidestand – 6•4
steering head bearings – 6•14
steering stem – 6•12
suspension – 6•15, 6•16
swingarm – 6•16, 6•18
Fuel – 4•1
Fuel and exhaust systems – 4•1 *et seq*
air filter housing – 4•3
air/fuel mixture – 4•6
carburettors – 4•6, 4•7, 4•10, – 4•11
exhaust system – 4•20
fuel pump and relay – 4•17
fuel tank – 4•4
fuel warning light and level sensor – 4•18
intake duct assemblies – 4•17
throttle cables – 4•19
V-boost system – 4•14
Fuel filter renewal – 1•21
Fuel hoses renewal – 1•28
Fuel mixture adjustment – 4•6
Fuel pump and relay check, removal and installation – 4•17
Fuel system check – 1•6

Fuel tank removal, installation and repair – 4•4
Fuel warning light and level sensor check and replacement – 4•18
Fuses check and renewal – 9•4

G

Gearchange lever removal and installation – 6•2
Gearchange mechanism removal, inspection and installation – 2•35

H

Handlebars
removal and installation – 6•4
switches
check – 9•14
removal and installation – 9•14
Headlight
aim check – 1•15
assembly removal and installation – 9•7
bulb renewal – 9•6
check – 9•5
Horn check and renewal – 9•18
Hoses and unions
brake – 7•10
coolant – 3•9
HT coil assembly check, removal and installation – 5•2

I

Identification numbers – 0•9
Idle speed check – 1•6
Ignition (main) switch check, removal and installation – 9•13
Ignition system – 5•1 *et seq*
advance unit – 5•7
control unit – 5•6
HT coil assembly – 5•2
pick-up coil(s) – 5•5
system check – 5•2
timing – 5•6
Instruments
check and renewal – 9•11
cluster removal and installation – 9•10
light bulbs renewal – 9•12
Intake duct assemblies – 4•17
Introduction – 0•4

L

Legal checks – 0•16
Levers
pivot lubrication – 1•14
removal and installation – 6•4
Lighting – 0•16
system check – 9•5
Lubricants and fluids – 1•2, REF•23 *et seq*

M

Main bearings
general information – 2•56
removal, inspection and installation – 2•57
Maintenance schedule – 1•3
Master cylinder
removal, overhaul and installation
clutch – 2•30
front brake – 7•7
rear brake – 7•9
Middle gear assembly removal, inspection and installation – 2•47
Mirrors removal and installation – 8•4
Model development – 0•10
MOT test checks – REF•27 *et seq*
Mudguard removal and installation – 8•3

N

Neutral switch check, removal and installation – 9•14
Nuts and bolts tightness check – 1•18

O

Oil change
engine – 1•12, 1•18
final drive – 1•20
forks – 1•28, 6•6
Oil level check
engine/transmission – 0•13
final drive – 1•14
Oil pressure check – 1•28
Oil level sensor check, removal and installation – 9•18
Oil pump and pipes removal and installation – 2•36
Oil pump disassembly, inspection and reassembly – 2•39

P

Pads
renewal – 7•2
wear check – 1•11
Pedal removal and installation
brake – 6•2
Performance data – 0•10
Pick-up coil(s) check and renewal – 5•5
Piston rings inspection and installation – 2•46
Pistons removal, inspection and installation – 2•44

R

Radiator
pressure cap check – 3•2
removal and installation – 3•5
Rear shock absorbers
adjustments – 6•16
removal, inspection and installation – 6•15
Reference – REF•1 *et seq*
Regulator/rectifier check and renewal – 9•27
Relays
fuel pump – 4•17
sidestand – 9•16
starter – 9•19
starter circuit cut-off – 9•17
Release cylinder removal, overhaul and installation – 2•32
Routine maintenance and servicing – 1•1 *et seq*
air filter – 1•9, 1•20
battery – 1•12
brake system – 1•11, 1•28
cables – 1•14
carburettors – 1•7
clutch – 1•18, 1•28
cooling system – 1•10, 1•26
cylinder compression – 1•28
engine oil – 1•12, 1•18, 1•28
evaporative emission control (EVAP) system – 1•7
final drive oil – 1•14, 1•20
fork oil – 1•28
fuel system – 1•6, 1•21, 1•28
headlight aim – 1•15
idle speed – 1•6
lever pivot lubrication – 1•14
maintenance schedule – 1•3

nuts and bolts tightness – 1•18
oil filter – 1•18
spark plugs – 1•5, 1•18
stand lubrication – 1•14
starter interlock circuit – 1•15
steering head bearings – 1•16, 1•21
suspension – 1•15
swingarm bearings – 1•21
throttle cable – 1•14
tyres – 1•18
valve clearances – 1•21
wheel bearings – 1•18
wheels – 1•18
Running-in procedure – 2•67

S

Safety First! – 0•12, 0•16
Seats removal and installation – 8•1
Security – REF•20 *et seq*
Selector drum and forks removal, inspection and installation – 2•65
Shock absorbers
adjustments – 6•16
removal, inspection and installation – 6•15
Side covers removal and installation – 8•2
Sidelight
bulb renewal – 9•6
check – 9•5
Sidestand
removal and installation – 6•4
starter interlock circuit check – 1•15
switch and relay check and renewal – 9•16
Signalling – 0•16
Spare parts – 0•9
Spark plug
check – 1•5
renewal – 1•18
Speedometer
cable renewal – 9•11
check and renewal – 9•11
removal and installation – 9•10
Stand lubrication – 1•14
Starter circuit cut-off relay check and renewal – 9•17
Starter clutch check, removal, inspection and installation – 2•24
Starter interlock circuit check – 1•15
Starter motor
overhaul – 9•20
removal and installation – 9•20
Starter relay check and renewal – 9•19
Start-up after overhaul – 2•66
Stator check, removal and installation – 9•25
Steering – 0•16
Steering head bearings
freeplay check – 1•16
inspection and replacement – 6•14
re-greasing – 1•21
Steering stem removal and installation – 6•12
Storage – REF•32 *et seq*
Suspension – 0•16
adjustments – 6•15
check – 1•15
settings – 6•16
Swingarm
bearings re-greasing – 1•21
inspection, bearing check and replacement – 6•18
removal and installation – 6•16
Switches
clutch – 9•17
cooling fan – 3•2
handlebar – 9•14
ignition (main) – 9•13
neutral – 9•14
sidestand – 9•16

T

Tachometer check and renewal – 9•12
Tail light
bulb renewal – 9•7
check – 9•5
removal and installation – 9•8
Technical Terms Explained – REF•51 *et seq*
Temperature gauge
check and renewal – 9•12
sender check and replacement – 3•3
Tensioner blade and guide blades removal, inspection and installation – 2•17
Thermostat and housing removal, check and installation – 3•4
Throttle cables
check – 1•14
removal and installation – 4•19
Timing general information and check – 5•6
Tools and workshop tips – REF•2 *et seq*
Transmission shafts
disassembly, inspection and reassembly – 2•62
removal and installation – 2•60
Turn signal
assemblies removal and installation – 9•9
bulbs renewal – 9•9
circuit check – 9•8
lights check – 9•6
Tyres
checks – 0•16, 1•18
general information and fitting – 7•18

V

Valves
clearances check – 1•21
covers removal and installation – 2•10
disassembly, inspection and reassembly – 2•20
V-Boost system check, removal and installation – 4•14

W

Warning light bulbs renewal – 9•12
Water pump check, removal, inspection and installation – 3•6
Wheel bearings
check – 1•18
removal, inspection and installation – 7•15
Wheels
alignment check – 7•12
check – 1•18
inspection and repair – 7•12
removal and installation
front – 7•13
rear – 7•14
Wiring diagrams – 9•29 *et seq*
Workshop tips – REF•2 *et seq*

Haynes Motorcycle Manuals – The Complete List

Title	Book No
BMW	
BMW 2-valve Twins (70 - 96)	**0249**
BMW K100 & 75 2-valve Models (83 - 96)	**1373**
BMW R850 & R1100 4-valve Twins (93 - 97)	**3466**
BSA	
BSA Bantam (48 - 71)	**0117**
BSA Unit Singles (58 - 72)	**0127**
BSA Pre-unit Singles (54 - 61)	**0326**
BSA A7 & A10 Twins (47 - 62)	**0121**
BSA A50 & A65 Twins (62 - 73)	**0155**
DUCATI	
Ducati MK III & Desmo Singles (69 - 76)	**0445**
Ducati 600, 750 & 900 2-valve V-Twins (91 - 96)	***3290***
Ducati 748, 916 & 996 4-valve V-Twins (94 - 01)	**3756**
HARLEY-DAVIDSON	
Harley-Davidson Sportsters (70 - 01)	**0702**
Harley-Davidson Big Twins (70 - 99)	**0703**
Harley-Davidson Twin Cam 88 (99 - 03)	**2478**
HONDA	
Honda NB, ND, NP & NS50 Melody (81 - 85)	◇ **0622**
Honda NE/NB50 Vision & SA50 Vision Met-in (85 - 95)	◇ **1278**
Honda MB, MBX, MT & MTX50 (80 - 93)	**0731**
Honda C50, C70 & C90 (67 - 99)	**0324**
Honda XR80R & XR100R (85 - 96)	**2218**
Honda XL/XR 80, 100, 125, 185 & 200 2-valve Models (78 - 87)	**0566**
Honda H100 & H100S Singles (80 - 92)	◇ **0734**
Honda CB/CD125T & CM125C Twins (77 - 88)	◇ **0571**
Honda CG125 (76 - 00)	◇ **0433**
Honda NS125 (86 - 93)	◇ **3056**
Honda MBX/MTX125 & MTX200 (83 - 93)	◇ **1132**
Honda CD/CM185 200T & CM250C 2-valve Twins (77 - 85)	**0572**
Honda XL/XR 250 & 500 (78 - 84)	**0567**
Honda XR250L, XR250R & XR400R (86 - 03)	**2219**
Honda CB250 & CB400N Super Dreams (78 - 84)	◇ **0540**
Honda CR Motocross Bikes (86 - 01)	**2222**
Honda CBR400RR Fours (88 - 99)	**3552**
Honda VFR400 (NC30) & RVF400 (NC35) V-Fours (89 - 98)	**3496**
Honda CB500 (93 - 01)	**3753**
Honda CB400 & CB550 Fours (73 - 77)	**0262**
Honda CX/GL500 & 650 V-Twins (78 - 86)	**0442**
Honda CBX550 Four (82 - 86)	◇ **0940**
Honda XL600R & XR600R (83 - 00)	**2183**
Honda XL600/650V Transalp & XRV750 Africa Twin (87 - 02)	**3919**
Honda CBR600F1 & 1000F Fours (87 - 96)	**1730**
Honda CBR600F2 & F3 Fours (91 - 98)	**2070**
Honda CBR600F4 (99 - 02)	**3911**
Honda CB600F Hornet (98 - 02)	**3915**
Honda CB650 sohc Fours (78 - 84)	**0665**
Honda NTV600 Revere, NTV650 & NT650V Deauville (88 - 01)	**3243**
Honda Shadow VT600 & 750 (USA) (88 - 00)	**2312**
Honda CB750 sohc Four (69 - 79)	**0131**
Honda V45/65 Sabre & Magna (82 - 88)	**0820**
Honda VFR750 & 700 V-Fours (86 - 97)	**2101**
Honda VFR800 V-Fours (97 - 01)	**3703**
Honda VTR1000 (FireStorm, Super Hawk) & XL1000V (Varadero) (97 - 00)	**3744**
Honda CB750 & CB900 dohc Fours (78 - 84)	**0535**
Honda CBR900RR FireBlade (92 - 99)	**2161**
Honda CBR900RR FireBlade (00 - 03)	**4060**
Honda CBR1100XX Super Blackbird (97 - 02)	**3901**
Honda ST1100 Pan European V-Fours (90 - 01)	**3384**
Honda Shadow VT1100 (USA) (85 - 98)	**2313**
Honda GL1000 Gold Wing (75 - 79)	**0309**
Honda GL1100 Gold Wing (79 - 81)	**0669**
Honda Gold Wing 1200 (USA) (84 - 87)	**2199**
Honda Gold Wing 1500 (USA) (88 - 00)	**2225**

Title	Book No
KAWASAKI	
Kawasaki AE/AR 50 & 80 (81 - 95)	**1007**
Kawasaki KC, KE & KH100 (75 - 99)	**1371**
Kawasaki KMX125 & 200 (86 - 02)	◇ **3046**
Kawasaki 250, 350 & 400 Triples (72 - 79)	**0134**
Kawasaki 400 & 440 Twins (74 - 81)	**0281**
Kawasaki 400, 500 & 550 Fours (79 - 91)	**0910**
Kawasaki EN450 & 500 Twins (Ltd/Vulcan) (85 - 93)	**2053**
Kawasaki EX & ER500 (GPZ500S & ER-5) Twins (87 - 99)	**2052**
Kawasaki ZX600 (Ninja ZX-6, ZZ-R600) Fours (90 - 00)	**2146**
Kawasaki ZX-6R Ninja Fours (95 - 02)	**3541**
Kawasaki ZX600 (GPZ600R, GPX600R, Ninja 600R & RX) & ZX750 (GPX750R, Ninja 750R) Fours (85 - 97)	**1780**
Kawasaki 650 Four (76 - 78)	**0373**
Kawasaki Vulcan 700/750 & 800 (85 - 01)	**2457**
Kawasaki 750 Air-cooled Fours (80 - 91)	**0574**
Kawasaki ZR550 & 750 Zephyr Fours (90 - 97)	**3382**
Kawasaki ZX750 (Ninja ZX-7 & ZXR750) Fours (89 - 96)	**2054**
Kawasaki Ninja ZX-7R & ZX-9R (ZX750P, ZX900B/C/D/E) (94 - 00)	**3721**
Kawasaki 900 & 1000 Fours (73 - 77)	**0222**
Kawasaki ZX900, 1000 & 1100 Liquid-cooled Fours (83 - 97)	**1681**
MOTO GUZZI	
Moto Guzzi 750, 850 & 1000 V-Twins (74 - 78)	**0339**
MZ	
MZ ETZ Models (81 - 95)	◇ **1680**
NORTON	
Norton 500, 600, 650 & 750 Twins (57 - 70)	**0187**
Norton Commando (68 - 77)	**0125**
PEUGEOT	
Peugeot Speedfight, Trekker & Vivacity Scooters (96 - 02)	**3920**
PIAGGIO	
Piaggio (Vespa) Scooters (91 - 98)	**3492**
SUZUKI	
Suzuki GT, ZR & TS50 (77 - 90)	◇ **0799**
Suzuki TS50X (84 - 00)	◇ **1599**
Suzuki 100, 125, 185 & 250 Air-cooled Trail bikes (79 - 89)	**0797**
Suzuki GP100 & 125 Singles (78 - 93)	◇ **0576**
Suzuki GS, GN, GZ & DR125 Singles (82 - 99)	◇ **0888**
Suzuki 250 & 350 Twins (68 - 78)	**0120**
Suzuki GT250X7, GT200X5 & SB200 Twins (78 - 83)	◇ **0469**
Suzuki GS/GSX250, 400 & 450 Twins (79 - 85)	**0736**
Suzuki GS500 Twin (89 - 02)	**3238**
Suzuki GS550 (77 - 82) & GS750 Fours (76 - 79)	**0363**
Suzuki GS/GSX550 4-valve Fours (83 - 88)	**1133**
Suzuki SV650 (99 - 02)	**3912**
Suzuki GSX-R600 & 750 (96 - 00)	**3553**
Suzuki GSX-R600 (01 - 02), GSX-R750 (00 - 02) & GSX-R1000 (01 - 02)	**3986**
Suzuki GSF600 & 1200 Bandit Fours (95 - 01)	**3367**
Suzuki GS850 Fours (78 - 88)	**0536**
Suzuki GS1000 Four (77 - 79)	**0484**
Suzuki GSX-R750, GSX-R1100 (85 - 92), GSX600F, GSX750F, GSX1100F (Katana) Fours (88 - 96)	**2055**
Suzuki GSX600/750F & GSX750 (98 - 02)	**3987**
Suzuki GS/GSX1000, 1100 & 1150 4-valve Fours (79 - 88)	**0737**
Suzuki TL1000S/R & DL1000	**4083**
TRIUMPH	
Triumph Tiger Cub & Terrier (52 - 68)	**0414**
Triumph 350 & 500 Unit Twins (58 - 73)	**0137**
Triumph Pre-Unit Twins (47 - 62)	**0251**
Triumph 650 & 750 2-valve Unit Twins (63 - 83)	**0122**
Triumph Trident & BSA Rocket 3 (69 - 75)	**0136**
Triumph Fuel Injected Triples (97 - 00)	**3755**
Triumph Triples & Fours (carburettor engines) (91 - 99)	**2162**
VESPA	
Vespa P/PX125, 150 & 200 Scooters (78 - 95)	**0707**
Vespa Scooters (59 - 78)	**0126**

Title	Book No
YAMAHA	
Yamaha DT50 & 80 Trail Bikes (78 - 95)	◇ **0800**
Yamaha T50 & 80 Townmate (83 - 95)	◇ **1247**
Yamaha YB100 Singles (73 - 91)	◇ **0474**
Yamaha RS/RXS100 & 125 Singles (74 - 95)	**0331**
Yamaha RD & DT125LC (82 - 87)	**0887**
Yamaha TZR125 (87 - 93) & DT125R (88 - 02)	**1655**
Yamaha TY50, 80, 125 & 175 (74 - 84)	**0464**
Yamaha XT & SR125 (82 - 02)	**1021**
Yamaha Trail Bikes (81 - 00)	**2350**
Yamaha 250 & 350 Twins (70 - 79)	**0040**
Yamaha XS250, 360 & 400 sohc Twins (75 - 84)	**0378**
Yamaha RD250 & 350LC Twins (80 - 82)	**0803**
Yamaha RD350 YPVS Twins (83 - 95)	**1158**
Yamaha RD400 Twin (75 - 79)	**0333**
Yamaha XT, TT & SR500 Singles (75 - 83)	**0342**
Yamaha XZ550 Vision V-Twins (82 - 85)	**0821**
Yamaha FJ, FZ, XJ & YX600 Radian (84 - 92)	**2100**
Yamaha XJ600S (Diversion, Seca II) & XJ600N Fours (92 - 99)	**2145**
Yamaha YZF600R Thundercat & FZS600 Fazer (96 - 01)	**3702**
Yamaha YZF-R6 (98 - 02)	**3900**
Yamaha 650 Twins (70 - 83)	**0341**
Yamaha XJ650 & 750 Fours (80 - 84)	**0738**
Yamaha XS750 & 850 Triples (76 - 85)	**0340**
Yamaha TDM850, TRX850 & XTZ750 (89 - 99)	**3540**
Yamaha YZF750R & YZF1000R Thunderace (93 - 00)	**3720**
Yamaha FZR600, 750 & 1000 Fours (87 - 96)	**2056**
Yamaha XV (Virago) V-Twins (81 - 03)	**0802**
Yamaha XJ900F Fours (83 - 94)	**3239**
Yamaha XJ900S Diversion (94 - 01)	**3739**
Yamaha YZF-R1 (98 - 01)	**3754**
Yamaha FJ1100 & 1200 Fours (84 - 96)	**2057**
Yamaha XJR1200 & 1300 (95 - 03)	**3981**
Yamaha V-Max (85 - 03)	**4072**
ATVs	
Honda ATC70, 90, 110, 185 & 200 (71 - 85)	**0565**
Honda TRX300 Shaft Drive ATVs (88 - 00)	**2125**
Honda TRX300EX & TRX400EX ATVs (93 - 99)	**2318**
Honda Foreman 400 and 450 ATVs (95 - 02)	**2465**
Kawasaki Bayou 220/300 & Prairie 300 ATVs (86 - 01)	**2351**
Polaris ATVs (85 to 97)	**2302**
Yamaha YFS200 Blaster ATV (88 - 98)	**2317**
Yamaha YFB250 Timberwolf ATV (92 - 96)	**2217**
Yamaha YFM350 (ER and Big Bear) ATVs (87 - 99)	**2126**
Yamaha Warrior and Banshee ATVs (87 - 99)	**2314**
ATV Basics	**10450**
MOTORCYCLE TECHBOOKS	
Twist and Go (automatic transmission) Scooters	**4082**
Motorcycle Basics TechBook (2nd Edition)	**3515**
Motorcycle Electrical TechBook (3rd Edition)	**3471**
Motorcycle Fuel Systems TechBook	**3514**
Motorcycle Workshop Practice TechBook (2nd Edition)	**3470**

◇ = *not available in the USA* **Bold type** = *Superbike*

The manuals on this page are available through good motorcycle dealers and accessory shops.
In case of difficulty, contact: **Haynes Publishing**
(UK) **+44 1963 442030** (USA) **+1 805 498 6703**
(FR) **+33 1 47 17 66 29** (SV) **+46 18 124016**
(Australia/New Zealand) **+61 3 9763 8100**

MCL15.10/03

Preserving Our Motoring Heritage



The Model J Duesenberg Derham Tourster. Only eight of these magnificent cars were ever built – this is the only example to be found outside the United States of America

Almost every car you've ever loved, loathed or desired is gathered under one roof at the Haynes Motor Museum. Over 300 immaculately presented cars and motorbikes represent every aspect of our motoring heritage, from elegant reminders of bygone days, such as the superb Model J Duesenberg to curiosities like the bug-eyed BMW Isetta. There are also many old friends and flames. Perhaps you remember the 1959 Ford Popular that you did your courting in? The magnificent 'Red Collection' is a spectacle of classic sports cars including AC, Alfa Romeo, Austin Healey, Ferrari, Lamborghini, Maserati, MG, Riley, Porsche and Triumph.

A Perfect Day Out


Each and every vehicle at the Haynes Motor Museum has played its part in the history and culture of Motoring. Today, they make a wonderful spectacle and a great day out for all the family. Bring the kids, bring Mum and Dad, but above all bring your camera to capture those golden memories for ever. You will also find an impressive array of motoring memorabilia, a comfortable 70 seat video cinema and one of the most extensive transport book shops in Britain. The Pit Stop Cafe serves everything from a cup of tea to wholesome, home-made meals or, if you prefer, you can enjoy the large picnic area nestled in the beautiful rural surroundings of Somerset.



John Haynes O.B.E., Founder and Chairman of the museum at the wheel of a Haynes Light 12.



The 1936 490cc sohc-engined International Norton – well known for its racing success

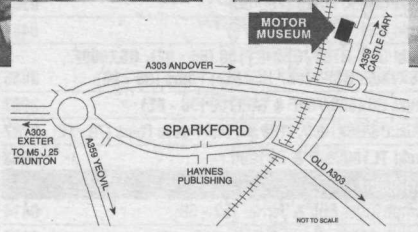

The Museum is situated on the A359 Yeovil to Frome road at Sparkford, just off the A303 in Somerset. It is about 40 miles south of Bristol, and 25 minutes drive from the M5 intersection at Taunton.

Open 9.30am - 5.30pm (10.00am - 4.00pm Winter) 7 days a week, *except Christmas Day, Boxing Day and New Years Day*

Special rates available for schools, coach parties and outings Charitable Trust No. 292048